




8 B

SensorLex® 8B Isolated Analog Signal Conditioners

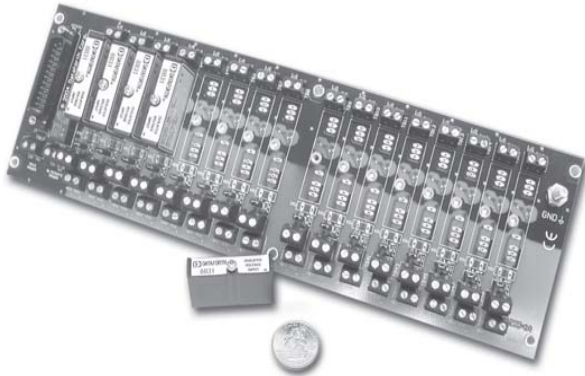

8B Modules

Dataforth's SensorLex® 8B line of isolated analog signal conditioners includes 20 family groups with a total of 135 models that interface to a wide variety of voltage, current, temperature, position, frequency, and strain measuring devices. Housed in a package only one-fifth the size of competing products, the 8B offers fully functional Instrument Class® performance with superior specifications such as $\pm 0.05\%$ accuracy, $\pm 0.02\%$ linearity, 5-pole filtering, 1500Vrms isolation, low output noise and much more.

Custom Signal Conditioning

Custom modules are available: consult factory for minimum quantity and pricing details on custom input ranges, output ranges, bandwidth, and other key parameters.

► Features

- $\pm 0.05\%$ Accuracy (Typical)
- $\pm 0.02\%$ Linearity
- 1500Vrms Transformer Isolation & up to 240Vrms Field-side Protection
- ANSI/IEEE C37.90.1 Transient Protection
- 5V Power (30mA Typical)
- 5-Pole Low-Pass Filtering
- Up to 120dB CMR
- 70dB NMR at 60Hz
- -40°C to $+85^{\circ}\text{C}$ Operating Temperature
- C-UL-US Listed (Class I, Division 2, Groups A, B, C, D)
- CE Compliant
- ATEX Compliance Pending
- Manufactured per RoHS Directive 2002/95/EC

► Applications

- Designed for Embedded Applications
 - PC/104 Embedded Solutions
 - Compact PCI Systems
 - VMEbus Systems
 - PXI Systems
- Protects User Equipment from Lightning and Industrial Equipment Power-Line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair

► **8B Selection Guide**

VOLTAGE INPUT MODULES, 3Hz BANDWIDTH Page 104

MODEL	INPUT RANGE	OUTPUT RANGE
8B30-01	±10mV	±5V
8B30-02	±50mV	±5V
8B30-03	±100mV	±5V
8B30-04	±10mV	0 to +5V
8B30-05	±50mV	0 to +5V
8B30-06	±100mV	0 to +5V
8B31-01	±1V	±5V
8B31-02	±5V	±5V
8B31-03	±10V	±5V
8B31-04	±1V	0 to +5V
8B31-05	±5V	0 to +5V
8B31-06	±10V	0 to +5V
8B31-07	±20V	±5V
8B31-08	±20V	0 to +5V
8B31-09	±40V	±5V
8B31-10	±40V	0 to +5V
8B31-12	±60V	±5V
8B31-13	±60V	0 to +5V

CURRENT INPUT MODULES, 3Hz Page 106

MODEL	INPUT RANGE	OUTPUT RANGE
8B32-01	4 to 20mA	0 to +5V
8B32-02	0 to 20mA	0 to +5V

ISOLATED TRUE RMS INPUT MODULES Page 108

MODEL	INPUT RANGE	OUTPUT RANGE
8B33-01	0 to 100mV	0 to +5V
8B33-02	0 to 1V	0 to +5V
8B33-03	0 to 10V	0 to +5V
8B33-04	0 to 150V	0 to +5V
8B33-05	0 to 300V	0 to +5V
8B33-06	0 to 1A	0 to +5V

LINEARIZED 2- OR 3-WIRE RTD MODULES (0 to +5V OUTPUT, 3Hz BW) Page 110

MODEL	TYPE	INPUT RANGE
8B34-01	100Ω Pt	-100°C to +100°C (-148°F to +212°F)
8B34-02	100Ω Pt	0°C to +100°C (+32°F to +212°F)
8B34-03	100Ω Pt	0°C to +200°C (+32°F to +392°F)
8B34-04	100Ω Pt	0°C to +600°C (+32°F to +1112°F)

LINEARIZED 4-WIRE RTD MODULES (0 to +5V OUTPUT, 3Hz BW) Page 112

MODEL	TYPE	INPUT RANGE
8B35-01	100Ω Pt	-100°C to +100°C (-148°F to +212°F)
8B35-02	100Ω Pt	0°C to +100°C (+32°F to +212°F)
8B35-03	100Ω Pt	0°C to +200°C (+32°F to +392°F)
8B35-04	100Ω Pt	0°C to +600°C (+32°F to +1112°F)

POTENTIOMETER INPUT MODULES (0 to +5V OUTPUT, 3Hz BW) Page 114

MODEL	INPUT RANGE	OUTPUT RANGE
8B36-01	0 to 100Ω	0 to +5V
8B36-02	0 to 500Ω	0 to +5V
8B36-03	0 to 1kΩ	0 to +5V
8B36-04	0 to 10kΩ	0 to +5V

THERMOCOUPLE INPUT MODULES (0 to +5V OUTPUT, 3Hz BW) Page 116

MODEL	TYPE	INPUT RANGE
8B37J	J	-100°C to +760°C (-148°F to +1400°F)
8B37K	K	-100°C to +1350°C (-148°F to +2462°F)
8B37T	T	-100°C to +400°C (-148°F to +752°F)
8B37R	R	0°C to +1750°C (+32°F to +3182°F)
8B37S	S	0°C to +1750°C (+32°F to +3182°F)

STRAIN GAGE INPUT MODULES Page 118

MODEL	INPUT RANGE	EXCITATION VOLTAGE	SENS	OUTPUT RANGE	BW
8B38-01	±10mV	+3.333V	3mV/V	±5V	8kHz
8B38-02	±30mV	+10.0V	3mV/V	±5V	8kHz
8B38-05	±20mV	+10.0V	2mV/V	±5V	8kHz
8B38-06	±10mV	+3.333V	3mV/V	0 to +5V	8kHz
8B38-07	±30mV	+10.0V	3mV/V	0 to +5V	8kHz
8B38-08	±20mV	+10.0V	2mV/V	0 to +5V	8kHz
8B38-31	±10mV	+3.333V	3mV/V	±5V	3Hz
8B38-32	±30mV	+10.0V	3mV/V	±5V	3Hz
8B38-35	±20mV	+10.0V	2mV/V	±5V	3Hz
8B38-36	±10mV	+3.333V	3mV/V	0 to +5V	3Hz
8B38-37	±30mV	+10.0V	3mV/V	0 to +5V	3Hz
8B38-38	±20mV	+10.0V	2mV/V	0 to +5V	3Hz

CURRENT OUTPUT MODULES, 100Hz BANDWIDTH Page 120

MODEL	INPUT RANGE	OUTPUT RANGE
8B39-01	0 to +5V	4 to 20mA
8B39-02	±5V	4 to 20mA
8B39-03	0 to +5V	0 to 20mA
8B39-04	±5V	0 to 20mA
8B39-07	±5V	-20 to 20mA

VOLTAGE INPUT MODULES, 1kHz BANDWIDTH Page 122

MODEL	INPUT RANGE	OUTPUT RANGE
8B40-01	±10mV	±5V
8B40-02	±50mV	±5V
8B40-03	±100mV	±5V
8B40-04	±10mV	0 to +5V
8B40-05	±50mV	0 to +5V
8B40-06	±100mV	0 to +5V
8B41-01	±1V	±5V
8B41-02	±5V	±5V
8B41-03	±10V	±5V
8B41-04	±1V	0 to +5V
8B41-05	±5V	0 to +5V
8B41-06	±10V	0 to +5V
8B41-07	±20V	±5V
8B41-08	±20V	0 to +5V
8B41-09	±40V	±5V
8B41-10	±40V	0 to +5V
8B41-12	±60V	±5V
8B41-13	±60V	0 to +5V

8B

► **8B Selection Guide (Continued)**

2-WIRE TRANSMITTER INTERFACE MODULES Page 124

MODEL	INPUT RANGE	OUTPUT RANGE
8B42-01	4 to 20mA	0 to +5V
8B42-02	4 to 20mA	+1 to +5V

DC LVDT INPUT MODULES, 1kHz BANDWIDTH Page 126

MODEL	INPUT RANGE	OUTPUT RANGE
8B43-01	±1V	±5V
8B43-02	±2V	±5V
8B43-03	±3V	±5V
8B43-04	±4V	±5V
8B43-05	±5V	±5V
8B43-11	±1V	0 to +5V
8B43-12	±2V	0 to +5V
8B43-13	±3V	0 to +5V
8B43-14	±4V	0 to +5V
8B43-15	±5V	0 to +5V

FREQUENCY INPUT MODULES Page 128

MODEL	INPUT RANGE	OUTPUT RANGE
8B45-01	0 to 500Hz	0 to +5V
8B45-02	0 to 1kHz	0 to +5V
8B45-03	0 to 2.5kHz	0 to +5V
8B45-04	0 to 5kHz	0 to +5V
8B45-05	0 to 10kHz	0 to +5V
8B45-06	0 to 25kHz	0 to +5V
8B45-07	0 to 50kHz	0 to +5V
8B45-08	0 to 100kHz	0 to +5V

**LINEARIZED THERMOCOUPLE INPUT MODULES (0 to +5V OUTPUT, 3Hz BW)
Page 130**

MODEL	TYPE	INPUT RANGE
8B47J-01	J	0°C to +760°C (+32°F to +1400°F)
8B47J-02	J	-100°C to +300°C (-148°F to +572°F)
8B47J-03	J	0°C to +500°C (+32°F to +932°F)
8B47J-12	J	-100°C to +760°C (-148°F to +1400°F)
8B47K-04	K	0°C to +1000°C (+32°F to +1832°F)
8B47K-05	K	0°C to +500°C (+32°F to +932°F)
8B47K-13	K	-100°C to +1350°C (-148°F to +2462°F)
8B47K-14	K	0°C to +1200°C (+32°F to +2192°F)
8B47T-06	T	-100°C to +400°C (-148°F to +752°F)
8B47T-07	T	0°C to +200°C (+32°F to +392°F)

VOLTAGE OUTPUT MODULES, 100Hz BANDWIDTH Page 132

MODEL	INPUT RANGE	OUTPUT RANGE
8B49-01	0 to +5V	±5V
8B49-02	±5V	±5V
8B49-03	±5V	0 to +5V
8B49-04	0 to +10V	±10V
8B49-05	±10V	±10V
8B49-06	±10V	0 to +10V
8B49-07	±5V	±10V

VOLTAGE INPUT MODULES, 20kHz BANDWIDTH Page 134

MODEL	INPUT RANGE	OUTPUT RANGE
8B50-01	±20mV	±5V
8B50-02	±50mV	±5V
8B50-03	±100mV	±5V
8B50-04	±20mV	0 to +5V
8B50-05	±50mV	0 to +5V
8B50-06	±100mV	0 to +5V
8B51-01	±1V	±5V
8B51-02	±5V	±5V
8B51-03	±10V	±5V
8B51-04	±1V	0 to +5V
8B51-05	±5V	0 to +5V
8B51-06	±10V	0 to +5V
8B51-07	±20V	±5V
8B51-08	±20V	0 to +5V
8B51-09	±40V	±5V
8B51-10	±40V	0 to +5V
8B51-12	±60V	±5V
8B51-13	±60V	0 to +5V

► **8B Selection Guide (Continued)**

ACCESSORIES Starts on Page 137

<u>MODEL</u>	<u>DESCRIPTION</u>
8BP01	Single channel DIN rail mount carrier
8BP02	Standard 2-channel backpanel
8BP02-1	8BP02 without cold junction compensation sensor
8BP02-2	8BP02 with DIN rail mounting option
8BP02-3	8BP02-1 with DIN rail mounting option
8BP04	Standard 4-channel backpanel
8BP04-1	8BP04 without cold junction compensation sensor
8BP04-2	8BP04 with DIN rail mounting option
8BP04-3	8BP04-1 with DIN rail mounting option
8BP08	Standard 8-channel backpanel
8BP08-1	8BP08 without cold junction compensation sensor
8BP08-2	8BP08 with DIN rail mounting option
8BP08-3	8BP08-1 with DIN rail mounting option
8BP16	Standard 16-channel backpanel
8BP16-1	8BP16 without cold junction compensation sensor
8BP16-2	8BP16 with DIN rail mounting option
8BP16-3	8BP16-1 with DIN rail mounting option
8BPWR-2	Power Supply Module
SCMXPRT-001	Power supply, 1A, 5VDC, 120VAC
SCMXPRT-001	Power supply, 1A, 5VDC, 220VAC
SCMXPRT-003	Power supply, 3A, 5VDC, 120VAC
SCMXPRT-003	Power supply, 3A, 5VDC, 220VAC
PWR-4505	Power supply, 5A, 5VDC, 85-264VAC
SCMXCA006-xx	System interface cable for backpanels
8BXIF	DB25 to screw terminal interface board
8BXCJC	Cold Junction Compensation sensor
8BPT	Non-isolated signal pass thru module
8B-PROTO	Breadboard kit
SCMXRK-002	19-inch metal rack for mounting backpanels
SCMXRAIL1-XX	DIN EN50022-35x7.5 (slotted steel), length -XX in meters
SCMXRAIL2-XX	DIN EN50035-G32 (slotted steel), length -XX in meters
SCMXRAIL3-XX	DIN EN50022-35x15 (slotted steel), length -XX in meters

†THERMOCOUPLE ALLOY COMBINATIONS

STANDARDS: DIN IEC 584, ANSI MC96-1-82, JIS C 1602-1981

<u>TYPE</u>	<u>MATERIAL</u>
J	Iron vs. Copper-Nickel
K	Nickel-Chromium vs. Nickel-Aluminum
T	Copper vs. Copper-Nickel
R	Platinum-13% Rhodium vs. Platinum
S	Platinum-10% Rhodium vs. Platinum

****RTD STANDARDS**

<u>TYPE</u>	<u>ALPHA COEFFICIENT</u>	<u>DIN</u>	<u>JIS</u>	<u>IEC</u>
100Ω PT	0.00385	DIN 43760	JIS C 1604-1989	IEC 751
120Ω NI	0.00672			

8B

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660