



LNX-500A Series

5-Port Industrial Unmanaged Ethernet Switch, with 5*10/100Tx



Features


- ▶ Supports 5-Port 10/100Tx RJ45 Fast Ethernet
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ Surge Protection: 2,000 VDC Support
- ▶ ESD Protection: 6,000 VDC Support
- ▶ Redundant Power Input Design: 12~48VDC
- ▶ Power Polarity Reserve Protect
- ▶ Overload Current Resettable Fuse Present
- ▶ Built-in 1 Relay Output for Fault Alarm
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature Range:
STD: -10° to 70°C, EOT: -40° to 75°C
- ▶ UL Class 1 Division 2 Certified
- ▶ 5-Year Warranty

INTRODUCTION

Antaira's LNX-500A industrial unmanaged Ethernet switch series are IP30 rated and DIN-Rail mountable. Each unit is designed with five 10/100Tx Fast Ethernet ports that have auto detection support for MDI or MDI-X. The LNX-500A series provides high EFT and ESD protection, and the built-in relay warning function alerts maintainers when power failures or port breaks occur.

The LNX-500A series includes two models: one with an operating temperature range of -10° to 70°C, and the other one with an extended operating temperature range of -40° to 75°C. It is a perfectly designed product to fulfill special needs for industrial automation, outdoor applications and harsh weather environments.

DIMENSIONS

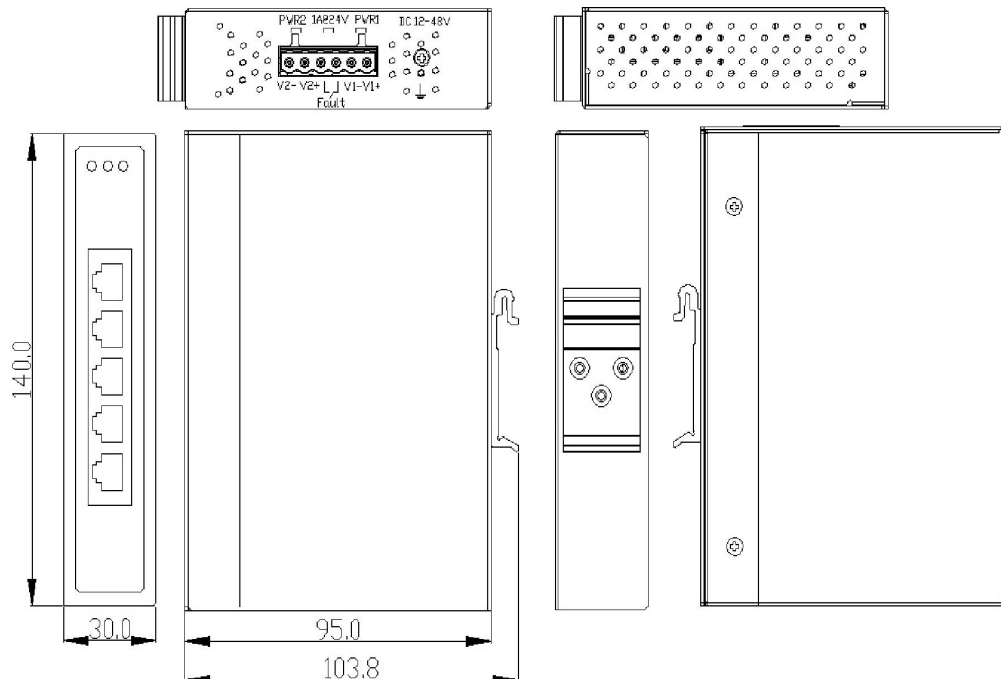

Toll-Free: 1 (844) 268-2472 | T: 1 (714) 671-9000 | F: 1 (714) 671-9944

www.antaira.com



SPECIFICATIONS

Technology		Power	
Standards	IEEE 802.3 10Tx Ethernet IEEE 802.3U 100Tx Fast Ethernet	Input Voltage	12~48VDC, Redundant Input
Processing Type	Store and Forward	Overload Current Protection	Present
Protocol	CSMA/CD	Connection	1 removable 6-contact terminal block
Flow Control	IEEE 802.3x back pressure flow control	Reverse Polarity Protection	Yes
Switch Properties		Power Consumption	3 Watt
Switch Architecture	Back-Plane (Switching Fabric): 1.0Gbps Packet Throughput Ability (Full-Duplex): 1.488Mpps @ 64bytes	Mechanical Characteristics	
Transfer Rate	14,880pps For Ethernet Port 148,800pps For Fast Ethernet Port	Housing	Metal IP30 protection
MAC Table Size	2K	Dimensions	30 x 140 x 95 mm (W x H x D)
Interface		Weight	Unit Weight: 1 lbs. Shipping Weight: 1.5lbs
Ethernet Port	5 x RJ45 - 10/100T(X) auto negotiation speed, Full/Half duplex mode, and auto MDI/MDI-X connection	Mounting	DIN-Rail or wall mounting (optional)
		Environmental Limits	
		Operating Temperature	STD: -10° to 70°C EOT: -40° to 75°C
		Storage Temperature	-40°C ~ 85°C
		Ambient Relative Humidity	5 to 95%, (non-condensing)
		Regulatory Approvals	
		EMI	FCC Class A
		EMS	EN6100-4-2,3,4,5,6,8,11,12 EN6100-6-2,4
		Free Fall	IEC60068-2-32
		Shock	IEC60068-2-27
		Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE, UL 60950-1, UL Class 1 Division 2, ISA 12.12.01
		Warranty	5 Years

ORDERING INFO

LNX-500A	5-Port Industrial Unmanaged Ethernet Switch with 5*10/100Tx
LNX-500A-T	5-Port Industrial Unmanaged Ethernet Switch with 5*10/100Tx; EOT -40° to 75°C
Optional Accessories	
MDR-10-24	10W Industrial DIN-Rail Power Supply, 24VDC
DR-15-24	15W Industrial DIN-Rail Power Supply, 24VDC

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660