


UTC-318x

18.5" Ubiquitous Touch Computer UTC-318D with Intel® BayTrail J1900

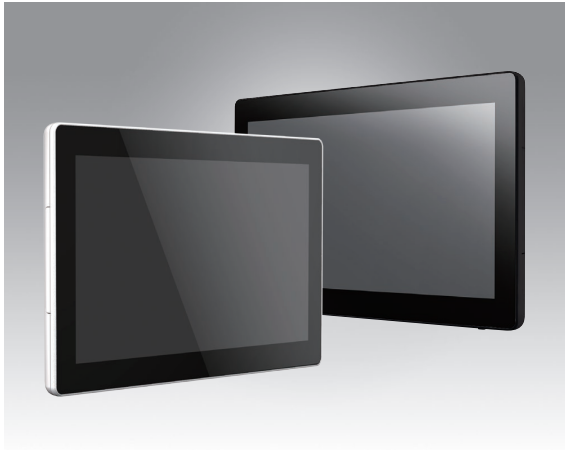

Features

- Low Power & Fanless design
- Built in Intel BayTrail J1900 (UTC-318D)
- Providing Natural Viewing Experience with 16:9 18.5" Display
- Front panel complies with IP65 protection standard
- Landscape & Portrait screen mode support by different applications
- VESA 100 mm standard mounting holes for varied mounting demands
- Attachable frame design , flexible for panel mount applications




Introduction

UTC-318x is the multi-purpose all-in-one computing system which equipped with wide format, touch based LCD panel. It is easy to integrate key peripherals and display systems for diversified self-service and interactive signage deploy in different application areas. With the removable frame , the system also could fulfill industries or control system applications with panel mounting design. UTC series touch panel computers are the best investments to enhance user satisfaction, further brand equity, and maximize business profits.


Specifications

Processor System	CPU	Intel® BayTrail J1900	
	Basic Frequency	2.0 GHz (Quad-Core)	
	L2 Cache	2MB	
	Memory	1 x SO-DIMM DDR3L 1333 MHz up to 8 GB	
	HDD	1 x 2.5 internal SATA HDD bay	
	Network	2 x Gigabit Ethernet ports (RJ-45)	
	I/O ports		1 x RS-232 , 1 x RS-232 / 422 / 485
			5 x USB 2.0 / 1 x USB 3.0
			2 x Gigabit Ethernet (RJ-45)
			1 x HDMI
	Audio Line-out x 1, Mic-in x 1		
	RJ-11 (option)		
Stereo Speaker	1W x 2		
BUS expansion	Full-size MiniPCIe/mSATA		
Mounting	VESA 100 x 100		
Dimension(WxHxD)	475 x 295 x 43.5 mm		
Weight	5 kg (13.4 lb)		
OS support		Windows Embedded Standard 7	
		Windows Embedded Standard 8	
		Embedded Linux 3.0	
Environmental Specifications	Operating Temperature	0 ~ 40° C (32 ~ 104° F)	
	Relative Humidity	10 ~ 95% @ 40° C non-condensing	
	Vibration	0.5G	
	Shock	10 G peak acceleration (11 msec. duration)	
	EMC/ Safety	CE, FCC, UL, CCC CB, BSMI	
	Front Panel Protection	IP65/ NEMA4 Compliant	
Power Supply	Input Rating	12 V/7 A (84W ITE Adapter)	
	Power consumption	Typical 32W Max. 70W	
LCD Display	Size	18.5" TFT LCD	
	Max Resolution	1366 x 768	
	Max Color	16.7M	
	Pixel Pitch (um)	300(H) x 300(V)	
	Brightness (cd/m ²)	250 (Typical)	
View Angle	170°/160°		
Touch Screen	Type	Analog Resistive 5-wires (Res. Flat Glass) / Projected Capacitive Touch Panel (Pcap. Flat Glass)	
	Light Transmission	Res. Touch : 80% ± 5% / P-Cap Touch : 90% ± 2%	
	Controller	COM interface / USB interface	

UTC-318D

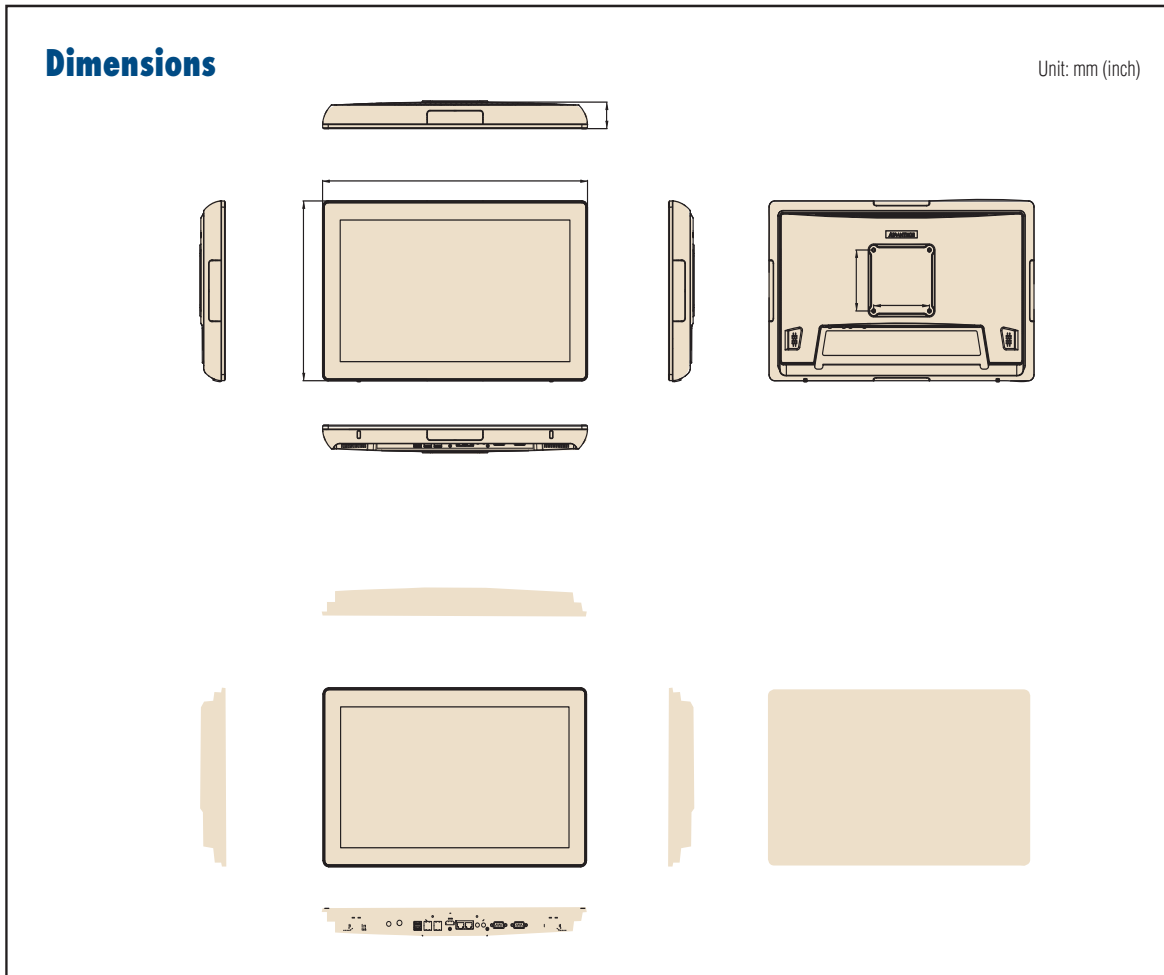

Fully- Integrated I/O

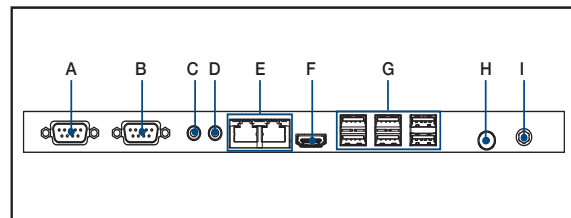

- | | |
|------------------|-------------------------------|
| A. Com1 | F. HDMI |
| B. Com2 | G. USB 2.0 x 5 / USB 3.0 x 1 |
| C. Line-out | H. Power button |
| D. Mic in | I. DC input 12V _{DC} |
| E. LAN ports x 2 | |

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660