


In-vehicle Computing



# Nuvo-7200VTC Series

Intel® 8th/9th-Gen Core™ In-Vehicle Controller with 4x or 8x PoE+ Ports, single-slot PCIe Cassette

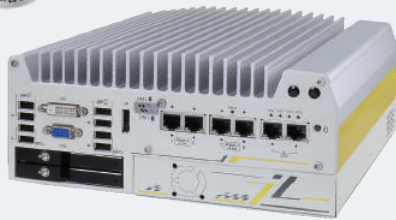

## Key Features

- Supports Intel® 8th/ 9th Core™ i7/ i5/ i3 LGA1151 socket-type CPU
- 4x or 8x 802.3at Gigabit PoE+ ports via M12 or RJ45 connectors
- Onboard isolated CAN bus for in-vehicle communication
- 4-CH isolated DI and 4-CH isolated DO
- 2x hot-swappable SATA HDD trays, supporting RAID 0/1
- 2x M.2 B key and 3x full-size mini-PCIe sockets
- 8~35V wide-range DC input with built-in ignition power control
- Patented Cassette for PCIe add-on card accommodation\*
- E-Mark and EN 50155 certificate

Contact Neosys

Get Quote

\*R.O.C Patent No. M456527

## Introduction

Nuvo-7200VTC is a rugged in-vehicle controller featuring Neosys' patented Cassette module with a x16 PCIe slot for add-on application card flexibility. Powered by Intel® 8th/ 9th Gen Core™ processors with up to 8-core/ 8-thread and 64GB DDR4 memory, the system is ideal for advance in-vehicle applications. Nuvo-7200VTC offers an assortment of peripherals, connections and expansion flexibility. It has four or eight 802.3at PoE+ ports to supply 25W power to connected devices such as IP cameras with M12 (x-coded connectors) and connector screw-lock mechanisms on I/Os like Gigabit Ethernet, USB3.0 and USB3.1 to guarantee extreme rugged connectivity in shock/ vibration environments. There are two M.2 and three mini-PCIe sockets to install 3G/ 4G, WIFI, GPS, and CAN module for wireless communication. Neosys also offers a 4G cellular module option certified to work with renowned US telecommunications company which can save you implementation time and cost.

On top of all that, Neosys' patented Cassette design offers one additional PCIe slot for an add-on card, making it that much more flexible for in-vehicle applications. Nuvo-7200VTC also features two hot-swappable SATA HDD trays, isolated CAN bus for in-vehicle communication, isolated DIO for sensor/ actuator control, 8~35V wide-range DC input with ignition power control and is in compliance with E-Mark and EN 50155. The Nuvo-7200VTC is a flexible and reliable solution for various in-vehicle applications.


## Specifications

System Core		Expansion Bus	
<b>Processor</b>	Supports Intel® 8th/9th-Gen Coffee Lake CPU (LGA1151 socket, 35W TDP) - Intel® Core™ i7-8700T/ i7-9700TE - Intel® Core™ i5-8500T/ i5-9500TE - Intel® Core™ i3-8100T/ i3-9100TE	<b>PCI Express</b>	1x PCIe x16 slot@Gen3, 16-lanes PCIe signals in Cassette
<b>Chipset</b>	Intel® Q370 platform controller hub	<b>Mini PCI-E</b>	1x full-size mini PCI Express socket with internal SIM socket (mux with mSATA) 2x full-size mini-PCIe sockets (USB signals only) with internal SIM sockets
<b>Graphics</b>	Integrated Intel® HD Graphics 630	<b>M.2</b>	2x M.2 2242 B key socket, one with dual front-accessible SIM sockets, supporting dual SIM mode with selected M.2 LTE module
<b>Memory</b>	Up to 64 GB DDR4 2666/ 2400 SDRAM (two SODIMM slots)	<b>Power Supply</b>	
<b>AMT</b>	Supports AMT 12.0	<b>DC Input</b>	1x 3-pin pluggable terminal block for 8~35V DC input (IGN/ GND/ V+)
<b>TPM</b>	Supports TPM 2.0	<b>Remote Ctrl. &amp; Status Output</b>	1x 3-pin pluggable terminal block for remote control and PWR LED output
<b>I/O Interface</b>		<b>Mechanical</b>	
<b>Ethernet</b>	2x Gigabit Ethernet ports by Intel® I219 and I210	<b>Dimension</b>	240 mm (W) x 225 mm (D) x 103mm (H)
<b>PoE+</b>	4x IEEE 802.3at (25.5W) Gigabit PoE+ ports by Intel® I210, - M12 x-coded connector (Nuvo-7200VTC); - RJ45 connector (Nuvo-7204VTC) 8x IEEE 802.3at (25.5W) Gigabit PoE+ ports by Intel® I210 - RJ45 connector (Nuvo-7208VTC)	<b>Weight</b>	3.7 kg
<b>CAN</b>	1x isolated CAN 2.0 port	<b>Mounting</b>	Neosys' patented damping bracket (standard) or optional DIN-rail mounting
<b>Isolated DIO</b>	4x isolated DI and 4x isolated DO	<b>Environmental</b>	
<b>USB</b>	4x USB 3.1 Gen2 (10 Gbps) ports 4x USB 3.1 Gen1 (5 Gbps) ports	<b>Operating Temperature</b>	-40°C ~ 70°C **
<b>Video Port</b>	1x VGA connector, supporting 1920 x 1200 resolution 1x DVI-D connector, supporting 1920 x 1200 resolution 1x DisplayPort connector, supporting 4096 x 2304 resolution	<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Serial Port</b>	2x software-programmable RS-232/422/485 ports (COM1/ COM2) 2x RS-232 ports (COM3/ COM4)	<b>Humidity</b>	10%~90% , non-condensing
<b>Audio</b>	1x Mic-in and 1x speaker-out	<b>Vibration</b>	Operating, MIL-STD-810G, Method 514.6, Category 4
<b>Storage Interface</b>		<b>Shock</b>	Operating, MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II
<b>SATA HDD</b>	2x hot-swappable HDD tray for 2.5" HDD/ SSD installation	<b>EMC</b>	EN 50155 (Nuvo-7200VTC), E-Mark (Nuvo-7208VTC) CE/FCC Class A, according to EN 55022 & EN 55024
<b>mSATA</b>	1x full-size mSATA port (mux with mini-PCIe)		
<b>M.2</b>	1x M.2 2280 M key socket (PCIe Gen3 x4) for NVMe SSD or Intel® Optane™ memory installation		


\* For i7-8700 running at 65W mode, the highest operating temperature shall be limited to 50°C and thermal throttling may occur when sustained full-loading applied. Users can configure CPU power in BIOS to obtain higher operating temperature.  
\*\* For sub-zero operating temperature, a wide temperature HDD or Solid State Disk (SSD) is required.

Nuvo-7200VTC Series

## Appearance

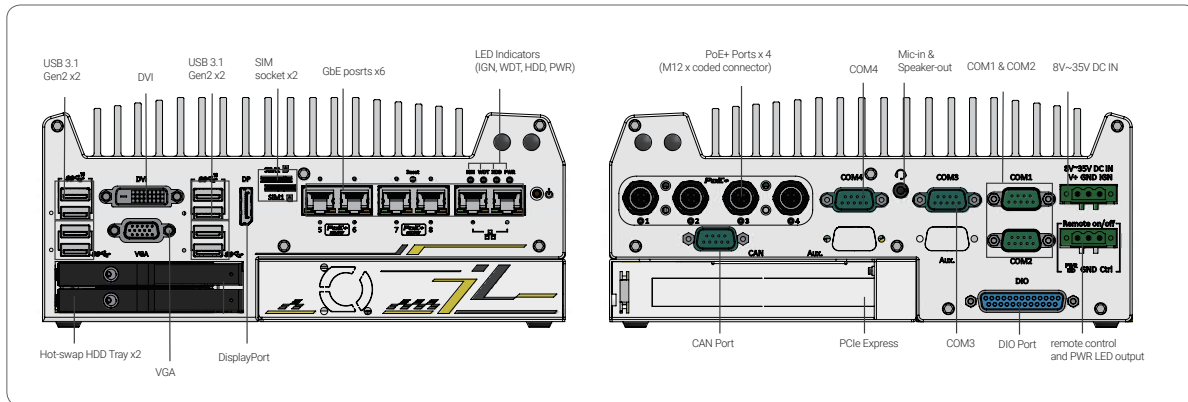

## Dimensions

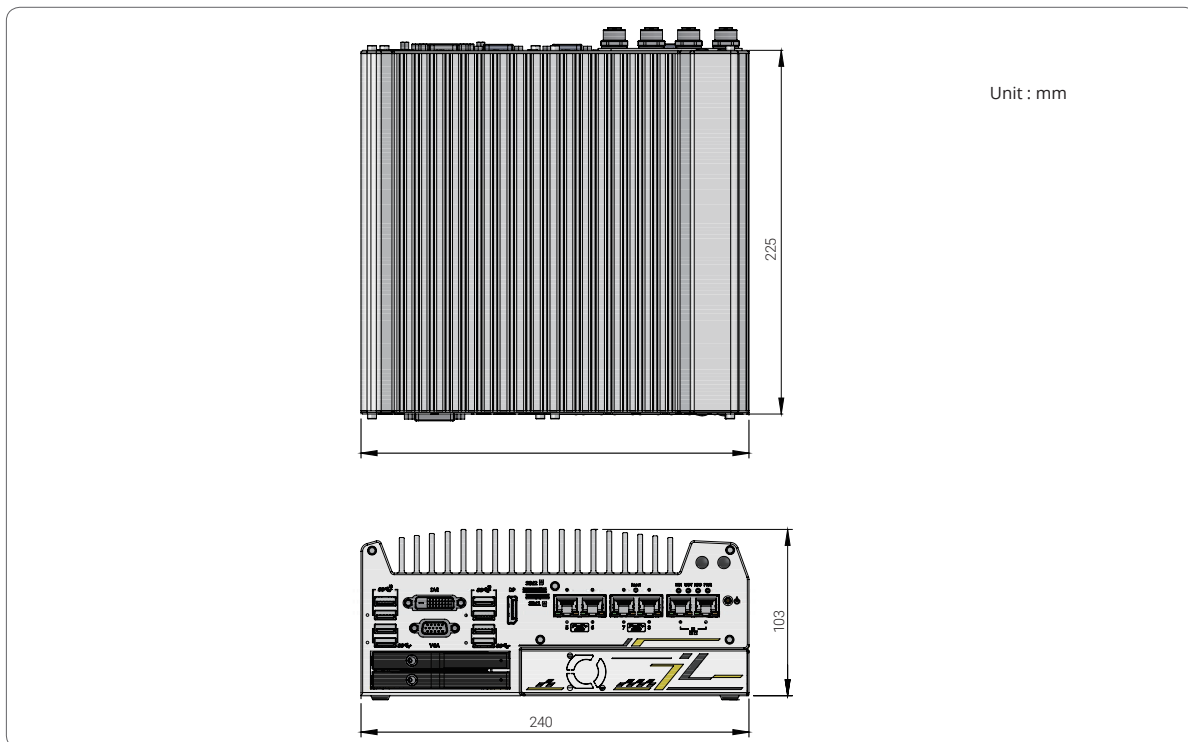

## Ordering Information

Model No.	Product Description
Nuvo-7200VTC	Intel® 8th/9th-Gen Core™ in-vehicle controller with 4x M12 PoE+ ports, DIO, CAN bus and RAID, single-slot PCI Express Cassette
Nuvo-7204VTC	Intel® 8th/9th-Gen Core™ in-vehicle controller with 4x RJ45 PoE+ ports, DIO, CAN bus and RAID, single-slot PCI Express Cassette
Nuvo-7208VTC	Intel® 8th/9th-Gen Core™ in-vehicle controller with 8x RJ45 PoE+ ports, DIO, CAN bus and RAID, single-slot PCI Express Cassette

## Optional Accessories

<b>Cbl-M12X8M-RJ45-500CM</b>	M12 (8-pole-X-coded) to RJ45, CAT6, length : 500CM
<b>Cbl-M12X8M-RJ45-1000CM</b>	M12 (8-pole-X-coded) to RJ45, CAT6, length : 1000CM
<b>PA-120W-OW</b>	120W AC/DC power adapter 20V/6A; 18AWG/120cm; cord end terminals for terminal block, operating temperature : -30 to 70 °C.

## Optional Cellular Module

<b>NSIO-LTE-7455</b>	Cat. 6 LTE embedded socket modem
----------------------	----------------------------------

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660