

PICO511

Pico-ITX SBC with 7th Gen Intel® Core™ i7/i5/i3 & Celeron® Processor, LVDS and GbE LAN

Features

- 7th gen Intel® Core™ i7/i5/i3 & Celeron® processor
- 1 DDR4 SO-DIMM, up to 16GB
- 2 PCI Express Mini Card slots
- Intel® AMT 11 supported



▲ Assembly view



Core System


CPU	7th gen Intel® i7/i5/i3 & Celeron® processor onboard
System Memory	1 x 260-pin DDR4-2133 SO-DIMM, up to 16GB
Chipset	N/A
BIOS	AMI
SSD	N/A
Watchdog Timer	65535 levels, 1 ~ 65535 sec.
Expansion Interface	1 x full-size PCI Express Mini Card slot with mSATA supported 1 x half-size PCI Express Mini Card slot 1 x PCIe1, 1 x LPC, 1 x DDI, 4 x USB 3.0, 1 x HD audio and 1 x SMBus (through expansion connector)
Battery Lithium	Lithium 3V/220mAh
Power Input	1 x 4-pin connector +12V DC-in only AT Auto Power On function supported
Power Requirements	Intel® i7-7600U @ 2.8 GHz 16GB DDR4 max. RMS. +12V @ 2.5A Intel® i5-7300U @ 2.6 GHz 16GB DDR4 max. RMS. +12V @ 2.3A Intel® i3-7100U @ 2.4 GHz 16GB DDR4 max. RMS. +12V @ 2.2A Intel® Celeron®-3965U @ 2.2 GHz 16GB DDR4 max. RMS. +12V @ 1.7A
Size	100 x 72 mm
Board Thickness	1.6 mm
Temperature	-20°C ~ +70°C (-4°F ~ +158°F), operation
Relative Humidity	10% ~ 95% relative humidity, non-condensing

I/O

MIO	N/A
SATA	1 x SATA-600
Hardware Monitoring	Detect CPU/system temperature, voltage and fan speed
Ethernet	1 port 10/100/1000 Mbps supports Wake-on-LAN, PXE Boot ROM with Intel® i219LM
Audio	N/A
USB	1 x USB 2.0
SMBus/I ² C	Yes, for advanced monitoring/control
Digital I/O	N/A
TPM	ST ST33TPM12LPC with TPM 1.2 compliant


Display

Chipset	Intel® integrated Gfx graphic engine
Memory Size	Share system memory
Display Interface	1 x LVDS; 18/24-bit single/dual channel

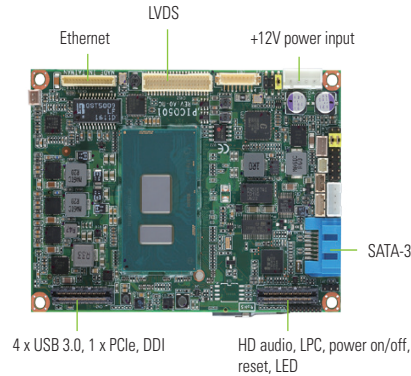

4 x USB 3.0, 1 x PCIe, DDI HD audio, LPC, power on/off, reset, LED

DDR4 SO-DIMM

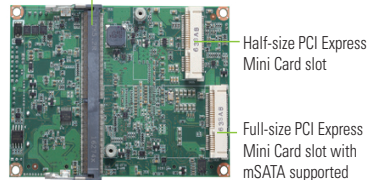

▲ Rear view

Packing List

Standard

Quick installation guide, user's manual/utility CD and accessories

Accessories

Part Number	Description	Qty
8593A071010	AX93A07 I/O board	1
59403208000E	SATA cable	1
594P8800600E	SATA power cable	1
594P8802810E	USB cable	1
59190400500E	Fan cable	1
5078H511000E	Heatspreader	1
5078H500100E	Cooler	1

Ordering Information

Standard

PICO511LG-i7-7600U (P/N: E38H511103)	Pico-ITX SBC with Intel® Core™ i7-7600U processor (2.8 ~ 3.9 GHz, 4MB cache, 15W), LVDS, 1 GbE LAN, 1 USB
PICO511LG-i5-7300U (P/N: E38H511102)	Pico-ITX SBC with Intel® Core™ i5-7300U processor (2.6 ~ 3.5 GHz, 3MB cache, 15W), LVDS, 1 GbE LAN, 1 USB
PICO511LG-i3-7100U (P/N: E38H511101)	Pico-ITX SBC with Intel® Core™ i3-7100U processor (2.4 GHz, 3MB cache, 15W), LVDS, 1 GbE LAN, 1 USB
PICO511LG-Celeron-3965U (P/N: E38H511100)	Pico-ITX SBC with Intel® Celeron® 3965U processor (2.2 GHz, 2MB cache, 15W), LVDS, 1 GbE LAN, 1 USB

Optional

AX93A00 (P/N: E393A00100)	I/O board for 1 x RS-232/422/485, 1 x RS-232, 4 x USB 3.0, 1 x VGA, 1 x Audio
AX93A01 (P/N: E393A01100)	I/O board for 1 x RS-232/422/485, 1 x RS-232, 4 x USB 3.0, 1 x HDMI, 1 x GbE LAN
AX93A02 (P/N: E393A02100)	I/O board for 1 x RS-232/422/485, 1 x RS-232, 4 x USB 3.0, 1 x Audio
AX93A09 (P/N: E393A09100)	I/O board for 1 x RS-232/422/485, 1 x RS-232, 4 x USB 2.0, 1 x Audio

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660