


IMB-151D-WF

Mini-ITX Motherboard

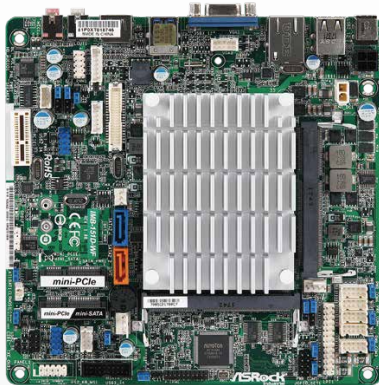

Key Features

- Intel® Baytrail SoC Processor J1900
- Supports Dual Channel DDR3L SO-DIMM 1333MHz, up to 8GB
- 1 x HDMI, 1 x VGA, 1 x LVDS
- 4 x USB3.0 & 6 x USB2.0 & 2 x SATA2
- 1 x Mini-PCIe, 1 x PCIe x1, 1 x mSATA
- 1 x Realtek LAN
- 1 x TPM Header
- 12~19 V DC-in

Specifications

Processor System

| | |
|------------|--|
| Dimensions | Mini-ITX (6.7-in x 6.7-in) |
| CPU | Intel® Baytrail SoC Processor J1900, QC, 2.00 GHz, 10 W |
| Chipset | SoC |

Expansion Slot

| | |
|------------------|---|
| PCIe | 1 x PCIe x1 |
| Mini-PCIe | 1 x half size with PCIe x1 and USB 2.0 |
| M.2 | N/A |
| mini-PCIe/ mSATA | 1 x full size with PCIe x1, SATA2 and USB 2.0 |

Memory

| | |
|------------|-----------------------------|
| Technology | Dual Channel DDR3L 1333 MHz |
| Max | 8GB |
| Socket | 2 x SO-DIMM |

Graphics

| | |
|---------------|--|
| Controller | Intel® Gen7 Intel Graphics DX 11*, OGL3.2 |
| VGA | Supports max resolution up to 1920 x 1200 |
| LVDS | Supports max resolution up to 1920 x 1200@60Hz |
| eDP | N/A |
| HDMI | Supports max resolution up to 1920x1200 |
| DVI | N/A |
| DisplayPort | N/A |
| Multi Display | Dual Display |

Ethernet

| | |
|------------|----------------------------------|
| Interface | 10/100/1000 Mbps |
| Controller | 1 x Realtek RTL8111G/RTL8111H-CG |

Rear I/O

| | |
|-------------|--------------------------|
| VGA | 1 |
| DVI | N/A |
| HDMI | 1 |
| DisplayPort | N/A |
| Ethernet | 1 |
| USB | 2 x USB 3.0, 2 x USB 2.0 |
| Audio Jack | 2 (Mic-in, Line-out) |
| Serial | N/A |
| PS/2 | N/A |

Internal Connector

| | |
|---------------------|--|
| USB | 2 x USB 3.0, 4 x USB 2.0 |
| LVDS | 1 |
| eDP | N/A |
| VGA | 1 |
| Serial | 4 x COM (RS-232), 1 x COM (RS-232/422/485) |
| SATA | 2 x SATA2 |
| Parallel | 1 |
| GPIO | 4 x GPI + 4 x GPO |
| SATA PWR Output Con | 1 |
| Speaker Header | 1 |
| TPM | 1 x Header |

Watchdog Timer

| | |
|----------|----------------------------------|
| Output | From Super I/O to drag RESETCON# |
| Interval | 256 segments, 0,1,2...255sec |

Power Requirements

| | |
|-----------|---|
| Input PWR | 12~19V DC-In (2-pin PWR Con) |
| Power On | AT/ATX Supported AT: Directly PWR on as Power input ready ATX: Press Button to PWR on after Power input ready |

Environment

| | |
|-----------------------|--------------|
| Operating Temperature | 0°C – 60°C |
| Storage Temperature | -40°C – 85°C |

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660