



SCM187-4R8EI-184EVK NEW

SMARC v2.1 SoM Evaluation Kit with i.MX 8M Mini Quad 1.6 GHz SoC, 4GB RAM, 8GB eMMC, GbE LAN, USB, Audio, and for Evaluation Purposes

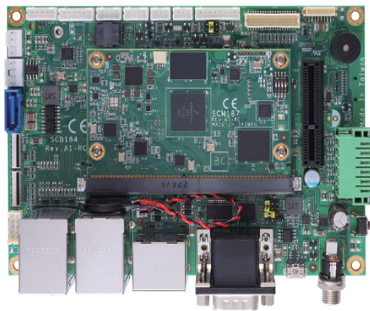


▲ Top view

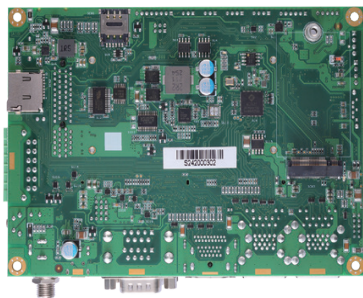

▲ Rear view



▲ Front view



▲ Side view

Features

- NXP i.MX 8M Mini Quad A53 Core Processor
- Cortex-M4 for Real-time Control
- Dual CANbus
- Dual-channel 24-bit LVDS
- GbE LAN
- Audio
- Micro SD Socket
- 12V-24V Wide Voltage
- Yocto 4.0

Specifications

Core System

CPU	NXP i.MX 8M Mini 1.6GHz SoC with Quad A53
System Memory	LPDDR4 4GB
Operating System	Yocto 4.0, Linux Kernel 5.15.52
Storage	1 x Micro SD slot 1 x 8GB eMMC

Internal I/O and Features

PCIe*	1 x PCIe x4 slot (SCM187 support PCIe Gen2 x1)
USB*	2 x USB 2.0 (not support on SCM187)
Audio	1 x Line In/ Line Out
CANbus	2 x CANbus
I ² C	2 x I ² C Header
QSPI	1 x QSPI Header
SPI	1 x SPI Header
Graphics	1 x Dual-channel 24-bit LVDS
5G*	1 x SIM card slot (not support on SCM187) 1 x M.2 Key B 3052 slot for 5G Module (not support on SCM187)
SATA*	1 x SATA for SATA III (not support on SCM187) 1 x SATA Power (not support on SCM187)
Fan	1 x Fan control
Storage	1 x 8GB eMMC
RTC	1 x RTC-Battery (CR2032)
Security*	1 x TPM 2.0 (option, none in default)

* The connected SMARC module must also support the features for the connector to function. Refer to the SMARC module's datasheets for information about supported features.

External I/O

Ethernet*	2 x GbE LAN (SCM187 support 1 x GbE LAN)
USB*	4 x USB 2.0 Type A (SCM187 support USB 2.0)
Graphics*	1 x HDMI (not support on SCM187) 1 x DisplayPort (not support on SCM187)
COM	1 x DB9 for RS-232 (Tx/Rx) 1 x DB9 for RS-232/RS-485 (Tx/Rx)
OS Flash	1 x OS Flash
GPIO	10 x GPIO
Power	1 x Lockable DC jack (12V-24V)
Reset	1 x Reset button
Storage	1 x Micro SD slot

* The connected SMARC module must also support the features for the connector to function. Refer to the SMARC module’s datasheets for information about supported features.

Mechanical and Environmental

Power Input	12V-24V DC-in
Dimensions	146 x 102 mm (approx. 5.75" x 4.02")
Operating Temperature	-20°C to +70°C (-4°F to +158°F)
Operating Humidity	10% to 95%, non-condensing
Storage Temperature	-40°C to +85°C (-40°F to +185°F)
Storage Humidity	10% to 95%, non-condensing

Ordering Information

Standard

SCM187-4R8EI-184EVK	Evaluation Kit Boards, SMARC Module SCM187-4R8E-I with Baseboard SCB184 (Heatsink/Heat Spreader Excluded)
---------------------	---

* Specifications and certifications may vary based on different requirements.

Optional

ACC100-187-HS	SCM187 Heatsink Kit (-40°C to +75°C)
ACC100-187-HSP	SCM187 Heat Spreader Kit

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660