




AMD® Embedded G-Series SoC COM Express® Compact

KB968

G-Series
SoC

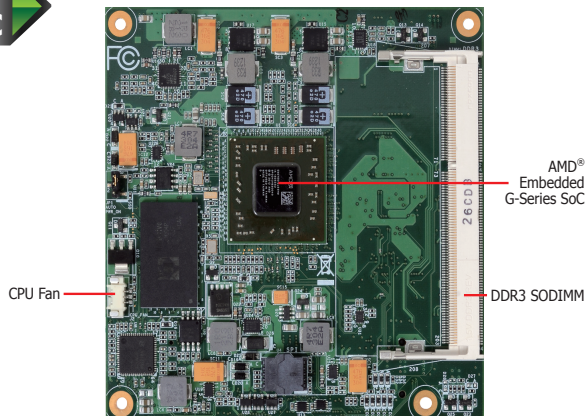

Features


MEMORY	1 DDR3 SODIMM up to 8GB
EXPANSION	1 PCIe x4, 4 PCIe x1 1 LPC, 1 I ² C, 1 SMBus, 2 serial 1 VGA, 1 DP/LVDS, 1 DP 8 USB: 2 USB 3.0/2.0, 6 USB 2.0 2 SATA 3.0 8-bit DIO
LAN	1 LAN
DIMENSIONS	COM Express® R2.1 Compact, Type 6 95mm x 95mm (3.74" x 3.74")

R2.1
Type6




SSD
Optional

Mechanical Drawing

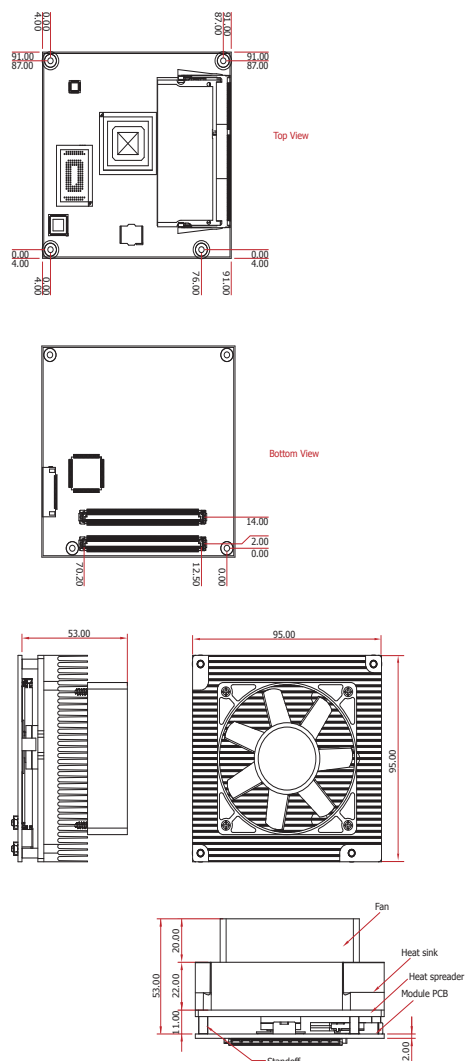

Block Diagram

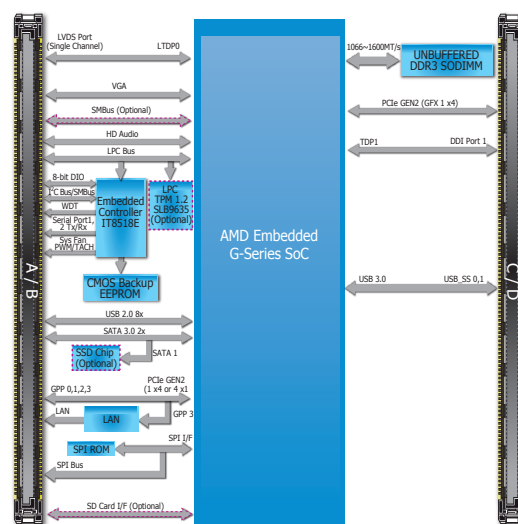

**AMD® Embedded G-Series SoC
COM Express® Compact**



KB968

Specifications

* Optional and is not supported in standard model. Please contact your sales representative for more information.

APU (Accelerated Processing Unit)

- AMD® Embedded G-Series SoC FT3 BGA
- 28nm process technology
- Please refer to the Ordering Information below

SYSTEM MEMORY

- One 204-pin DDR3 SODIMM socket
- Supports DDR3 1066/1333/1600MHz
- Supports single channel memory interface
- Supports up to 8GB system memory
- DRAM device technologies: 1Gb, 2Gb, 4Gb and 8Gb DDR3 DRAM technologies are supported for x8 and x16 devices, unbuffered, non-ECC

ONBOARD GRAPHICS FEATURES

- Advanced discrete-level GPU integrated in the processor
- Supports VGA, DP/LVDS and DP interfaces
- VGA: resolution up to 2048x1536 @ 60Hz
- LVDS: 18-bit, single channel, resolution up to 1600x900 @ 60Hz
- DP: resolution up to 4096x2160 @ 30Hz
- Supports hardware acceleration for DirectX 11.1, H.264, MPEG-2, MPEG-4 AVC, VC-1 and WMV

ONBOARD AUDIO FEATURES

- Supports High Definition Audio interface

ONBOARD LAN FEATURES

- Intel® WG1210AT Gigabit Ethernet Controller
- Integrated 10/100/1000 transceiver
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab

SERIAL ATA (SATA) INTERFACE

- Supports 2 Serial ATA interfaces
- SATA 3.0 with data transfer rate up to 6Gb/s
- Integrated Advanced Host Controller Interface (AHCI) controller

SSD*

- 2GB/4GB/8GB/16GB/32GB/64GB
- Write: 30MB/sec (max), Read: 70MB/sec (max)
- SATA to SSD onboard

TRUSTED PLATFORM MODULE (TPM)*

- Provides a Trusted PC for secure transactions
- Provides software license protection, enforcement and password protection

WATCHDOG TIMER

- Watchdog timeout programmable via software from 1 to 255 seconds

EXPANSION INTERFACES

- Supports 8 USB 2.0 ports (first 2 USB ports support up to USB 3.0)
- Supports 1 PCIe x4 (GFX)
- Supports 4 PCIe x1 (GPP, GPP3 is connected to onboard LAN by default)
- Supports LPC interface
- Supports I²C interface
- Supports SMBus interface
- Supports 2 serial interfaces (TX/RX)
- Supports 8-bit Digital I/O

DAMAGE FREE INTELLIGENCE

- Monitors APU temperature
- Monitors APU fan speed
- Monitors APU_VDD/APU_VDDNB/APU_VDDIO_SUS/1V8/0V95 voltages
- Watchdog timer function

BIOS

- 32Mbit SPI BIOS

POWER CONSUMPTION

- KB968-GX420BBS: 28.58 W with GX-420CA at 2.0GHz and 1x 4GB DDR3 SODIMM

OS SUPPORT

- Windows 7 Ultimate x86 & SP1 (32-bit)
- Windows 7 Ultimate x64 & SP1 (64-bit)
- Windows 8 Enterprise x86 (32-bit)
- Windows 8 Enterprise x64 (64-bit)

TEMPERATURE

- Operating: 0°C to 60°C
- Storage: -20°C to 85°C

HUMIDITY

- 5% to 90%

POWER INPUT

- 12V, 5VSB, VCC_RTC (ATX mode)
- 12V, VCC_RTC (AT mode)

PCB

- Dimensions
 - COM Express® Compact
 - 95mm (3.74") x 95mm (3.74")
- Compliance
 - PICMG COM Express® R2.1, Type 6

Ordering Information

Model Name	Processor	SODIMM	SSD	Power	Thermal	Temperature
KB968-GX415BBS	AMD® GX-415GA, Quad Core, 2M Cache, 1.5GHz, 15W	2 (8GB DDR3)	None	ATX/AT	Cooler	0°C to 60°C
KB968-GX420BBS	AMD® GX-420CA, Quad Core, 2M Cache, 2.0GHz, 25W	2 (8GB DDR3)	None	ATX/AT	Cooler	0°C to 60°C
KB968-GX217BBS	AMD® GX-217GA, Dual Core, 1M Cache, 1.65GHz, 15W	2 (8GB DDR3)	None	ATX/AT	Cooler	0°C to 60°C
KB968-GX210HBBS	AMD® GX-210HA, Dual Core, 1M Cache, 1.0GHz, 9W	2 (8GB DDR3)	None	ATX/AT	Cooler	0°C to 60°C
KB968-GX210JBBS	AMD® GX-210JA, Dual Core, 1M Cache, 1.0GHz, 6W	2 (8GB DDR3)	None	ATX/AT	Cooler	0°C to 60°C
KB968-GX416BBS	AMD® GX-416RA, Quad Core, 2M Cache, 1.6GHz, 15W, without GPU	2 (8GB DDR3)	None	ATX/AT	Cooler	0°C to 60°C

Packing List

- 1 KB968 board
- 1 DVD
- Heat spreader with heat sink and fan: 761-KB9680-000G

Optional Items

- COM331-B carrier board kit: 770-COM331-000G

www.dfi.com

DFI reserves the right to change the specifications at any time prior to the product's release. Changes thereafter will be based on the product's revision. Please contact your sales representative for the exact revision offered in your area. All product names mentioned are trademarks of their respective companies. © July 7, 2016 DFI Inc.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660