

LNP-0800G-24 Series

8-Port Industrial PoE+ Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000T (30W/Port), 9~55VDC Power Input



FEATURES

- ▶ Supports 8*10/100/1000T IEEE 802.3af/at Compliant with 30W/Port
- ▶ Supports 9.6Kbytes Jumbo Frame
- ▶ Supports Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ Power Input: 9~55VDC in 6-Pin Terminal Block
- ▶ Built-in 1 Relay Output for Power Failure Warning
- ▶ IP30 Rugged Metal Case Design
- ▶ DIN-Rail and Wall Mount Support
- ▶ Operating Temperature - STD: -10°C to 65°C, EOT: -40°C to 75°C
- ▶ 5-Year Warranty




INTRODUCTION

Antaira Technologies' LNP-0800G-24 Series is an 8-port industrial PoE+ gigabit unmanaged Ethernet switch that supports 8*10/100/1000T Ethernet ports. The LNP-0800G-24 series is a backward compliant PoE+ switch that will support IEEE 802.3af/at standards providing a maximum of 30 watts per port with an input voltage of 9~55VDC.

Antaira's LNP-0800G-24 Series has been specifically designed for rugged and harsh environmental deployments. This product series is housed in a hardened IP30-rated metal enclosure that includes DIN-rail and wall mounting hardware. There are two wide-operating temperature models for either a standard temperature range (STD: -10°C to 65°C) or an extended temperature range (EOT: -40°C to 75°C). The LNP-0800G-24 Series also provides high EFT and ESD protection for any industrial networking application within factory automation, ITS (including on-vehicle), solar, security, or any other outdoor or harsh environment.

DIMENSIONS

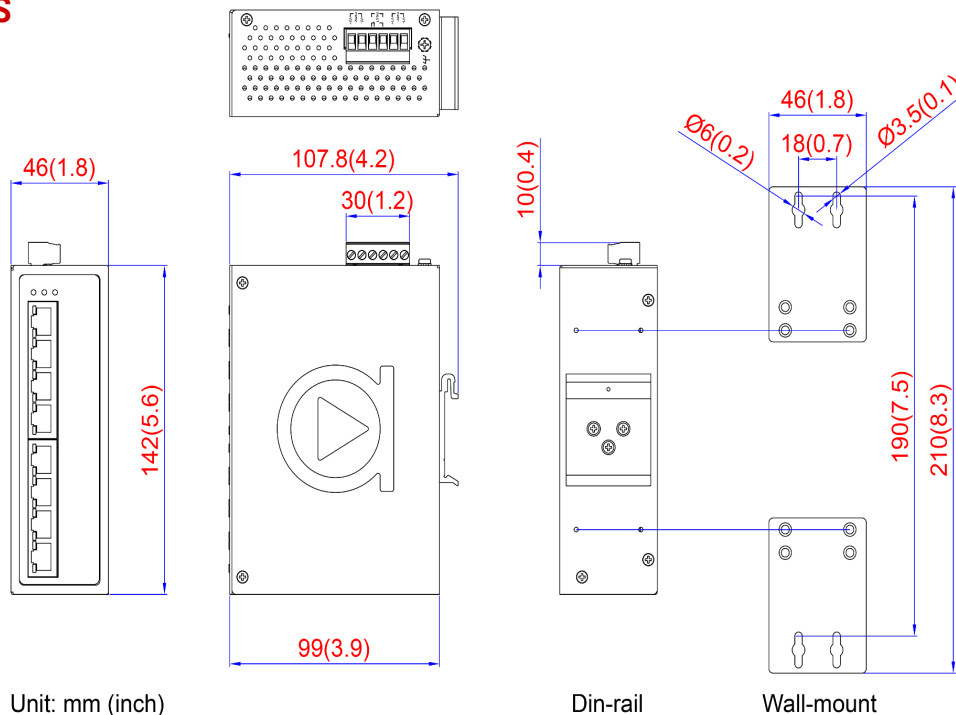

SPECIFICATIONS

TECHNOLOGY		POWER REQUIREMENT	
Standards	IEEE 802.3 10BASE-T Ethernet IEEE 802.3u 100BASE-TX Fast Ethernet IEEE 802.3ab 1000BASE-T Gigabit Ethernet IEEE 802.3af/at/bt Power over Ethernet	Input Voltage	9~55VDC Redundant Input
SWITCH PROPERTIES		Power Connection	1 removable 6-contact terminal block
Switch Architecture	Back-Plane (Switching Fabric): 16Gbps	Relay Contact	24VDC, 1A resistive
Transfer Rate	14,880pps for Ethernet 148,800pps for Fast Ethernet 1,488,000pps for Gigabit Ethernet	Overload Current Protection	Present
Jumbo Frame	9.6Kbytes	Reverse Polarity Protection	Present
MAC Table Size	8K	System Power Consumption	Max. 10W full loading
Memory Buffer	4Mbits	Max PoE Power Budget	60W@9VDC 90W@12VDC 150W@24VDC 200W@36VDC 240W@48~55VDC
PORT INTERFACE		ENVIRONMENTAL LIMITS	
Ethernet Port	8*10/100/1000BASE-T (30W/Port) Auto-negotiation speed, Full/Half duplex mode, and Auto MDI/MDI-X connection	Operating Temperature	STD: -10°C to 65°C EOT: -40°C to 75°C
PoE Pin Out	V+, V+, V-, V-, for pin 1, 2, 3, 6 (End-span, MDI Alternative A)	Storage Temperature	-40°C ~ 85°C
LED Indicators	System: Power 1, Power 2, Fault Ethernet Ports: On-Link/Flash-data transmitting PoE: On-connected to PD devices	Ambient Relative Humidity	5 to 95%, (non-condensing)
Network Cable	10BASE-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100BASE-TX: 2-pair UTP/STP Cat. 5 cable EIA/TIA-568 100-ohm (100m) 1000BASE-T: 4-pair UTP/STP Cat. 5/5E cable; EIA/TIA-568 100-ohm (100m)	REGULATORY APPROVALS	
MECHANICAL CHARACTERISTICS		EMI	FCC Part 15 Subpart B Class A, CE EN55032/EN61000-6-4 Class A
Housing	Metal, IP30 protection	EMS	CE EN55035/EN61000-6-2, IEC61000-4-2,3,4,5,6,8
Dimension	46 x 142 x 99 mm	Free Fall	IEC60068-2-32
Weight	Unit: 1.64 lbs. Shipping: 2.05 lbs.	Shock	IEC60068-2-27
Mounting	DIN-Rail mounting, Wall mounting	Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE, UL 61010-1, UL 61010-2-201 UL Class 1 Division 2, ISA 12.12.01
		Warranty	5 Years

ORDERING INFORMATION

LNP-0800G-24	8-Port Industrial PoE+ Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000T (30W/Port), 9~55VDC Power Input
LNP-0800G-24-T	8-Port Industrial PoE+ Gigabit Unmanaged Ethernet Switch, with 8*10/100/1000T (30W/Port), 9~55VDC Power Input; EOT: -40°C to 75°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660