



# FPC-9107-L2U4-G2

Ruggedized Edge AI Computing Platform supporting 250W GPU or Dual Nvidia® Tesla T4 Graphic Cards, Intel®10<sup>th</sup> Gen Xeon®Core™ Processor



## Features

- Intel 10<sup>th</sup> Gen (Comet Lake-S ) with W480E chipset
- Supports dual NVIDIA® Tesla T4 GPU or 250W GPU
- Wide Range DC power input (12~36V)
- HDMI x 1 +VGA x1 ( 2 independent display )
- Power on/off delay control/ Configurable ignition power control
- TPM2.0 support
- 2 x outside accessible SATA SSD, supporting RAID 0,1
- 2 x USB3.2 supports up to 10Gbps data transfer
- Front-accessible I/O support
- SMART FAN control support
- 1 x M.2 (NGFF) B-Key(2242/3052/2280) socket for storage or 5G / LTE
- 1 x M.2 (NGFF) E-Key(2230) socket for WiFi / BT

Industrial Automation

<b>System</b>	
CPU	10 <sup>th</sup> generation Intel® Xeon®Core™i9/i7/i5/i3 processor in LGA1200 socket
Memory	2 x 260-pin DDR4 SO-DIMM sockets, supporting 2933 ( i9/ i7 CPU)/2666( i5/ i3 CPU)/2400 MHz (Pentium/ Celeron CPU) SDRAM up to 64GB (ECC/ Non-ECC)
Chipset	Intel® W480E
Graphics	Integrated Intel® HD Graphics
ATA	2 x Serial ATA ports with 600MB/s HDD transfer rate
LAN Chipset	1 x Intel® WGI225LM 2.5GigE LAN 1 x Intel® WGI219LM Gbe controllers w/ iAMT14.0 2 x Intel® WG82583V GbE controllers
Watchdog Timer	1~255 levels reset
<b>I/O</b>	
Serial Port	2 x RS-232/422/485 configurable (default RS-232) 2 x RS-232
USB Port	2 x USB 3.2 Gen2 (10Gbps) / 2.0 ports 4 x USB 3.2 Gen1 (5Gbps) / 2.0 ports Internal USB dongle
LAN	4 x RJ-45 ports for GbE/2.5GbE
Video port	1 x HDMI 1 x DB-15 female connector for Analog RGB
Digital I/O Port	16 x DI, 16 x DO (1.5KV isolation protection / DO supports 24V 200mA)
Audio	Mic-in/Line-out
Expansion Bus	1 x mini-PCI Express Slots interconnected with SIM card sockets for optional WiFi/BT/3G/LTE/ GPS (PClex1+USB2.0, Full Size) 1 x M.2 E key ( 2230) with PClex1+USB2.0, for Wireless 1 x M.2 B key ( 2242/3052/2280 ) w/ (PClex2+USB3.0+SATA ) interconnected with SIM for 5G/LTE expansion or for storage ( either one) 2 x PCIe x16 slot (via x 8 lanes) or 1 x PCIe x16 slot (via x 16 lanes) Support dual Tesla or 250W GPU card 1 x PCIe x4 slot ( power budget 25W)

## Environmental

All specifications are subject to change without notice.

Operating Temp.	80W TDP CPU : -20 ~ 50°C (-4 ~ 122°F) 65W TDP CPU : -20 ~ 55°C (-4 ~ 131°F) 35W TDP CPU : -20 ~ 70°C (-4 ~ 158°F) w/ NVIDIA® Tesla T4 : -20 ~ 50°C (-4 ~ 122°F) w/ NVIDIA® RTX-3070 : -20 ~ 45°C (-4 ~ 112°F)
Storage Temp.	-40 ~ 85°C (-40 ~ 185°F)
Operating Humidity	10 ~ 95% @ 50°C (non-condensing)
Vibration	Comply with MIL-STD-810G, Method 514.6, Category 4 w/ SSD
Shock	Comply with MIL-STD-810G, Method 516.6, Procedure I, Table 516.6-II, 20G

## Qualification

Certification CE, FCC Class A

## Power Requirement

Main Power Input DC 12~36V input (w/ 2-pin DC input terminal block )

Secondary Power Input DC 12-36V input ( w/ 4-pin DC input terminal block for graphic cards power support)

Ignition Switch 2-pin terminal block: IGN, GND

## Storage

2 x 2.5" drive bays (outside accessible )  
1 x M.2 B key ( 2242/3052/2280 ) w/ (PClex2+USB3.0+ SATA ) interconnected with SIM for 5G/ LTE expansion or storage ( either one)

## Mechanical

Construction Metal

Mounting Wall-mount

Weight 7.4 kg (16.31lb)

Dimensions (W x D x H) 181 x 320 x 250 mm

## OS Support

Windows 10 IOT Enterprise 2019


Linux ( Kernel 4.9 )

## Ordering Information





FPC-9107-L2U4-G2 Ruggedized Edge AI Computing Platform supporting 250W GPU or Dual Tesla T4 Nvidia® Graphics Cards, Intel® 10<sup>th</sup> Gen Xeon® Core™ Processor with 4x LAN, 6 x USB3.1 ( Up to 80W TDP CPU) (BTO)

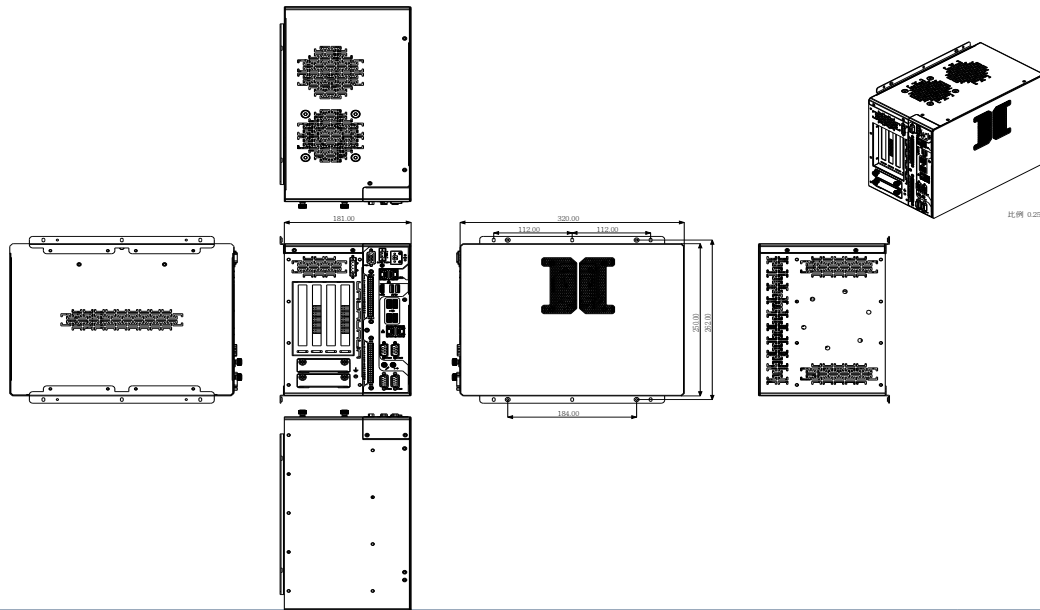





## Dimensions



### Optional Accessories

WMK-7000	Wall-mount kit for FPC-7XXX Series	
PAC-180W6C-FSP	180W AC/DC 24V adapter kit ( For System )	
PAC-280W6C-MW	280W AC/DC 24V adapter kit (For GPU Box)	
PAC-480W6C-MW	480W AC/DC 24V DIN Rail adapter kit (For System +GPU Box)	
FAN-9107T4-1	Thermal Kit for 1x Nvidia® Tesla T4 GPU card	
FAN-9107T4-2	Thermal Kit for 2x Nvidia® Tesla T4 GPU cards	

### Optional Configuration (CTOS\* Kit)

MK-4C-4G/8G/16G/32G	DDR4-2400 4GB/8GB/16GB/32G(DDR4-2933) SDRAM DIMM kit	
WIFI-IN2550	Intel AX200NGW M.2 Wi-Fi 6 module w/ 2 x 30cm internal wires	
ANT-H11	1 x 2dBi HSUPA antenna	
ANT-D11	1 x WiFi dual-band 2.4G/5G antenna	
Xeon® W-1250E	Intel® Xeon® W-1250E processor, L2/12M, 3.5G	
Core™ i9-10900E	Intel® 10 <sup>th</sup> Gen. Core™ i9-10900E processor, L2/20M, 2.8G	
Core™ i9-10900TE	Intel® 10 <sup>th</sup> Gen. Core™ i9-10900TE processor, L2/20M, 1.8G	
Core™ i7-10700E	Intel® 10 <sup>th</sup> Gen. Core™ i7-10700E processor, L2/16M, 2.9G	
Core™ i7-10700TE	Intel® 10 <sup>th</sup> Gen. Core™ i7-10700TE processor, L2/16M, 2.0G	
Core™ i5-10500E	Intel® 10 <sup>th</sup> Gen. Core™ i5-10500E processor, L2/12M, 3.1G	
Core™ i5-10500TE	Intel® 10 <sup>th</sup> Gen. Core™ i5-10500TE processor, L2/12M, 2.3G	
Core™ i3-10100E	Intel® 10 <sup>th</sup> Gen. Core™ i3-10100E processor, L2/6M, 3.2G	
Core™ i3-10100TE	Intel® 10 <sup>th</sup> Gen. Core™ i3-10100TE processor, L2/6M, 2.3G	



\*CTOS means Configure-to-Order Service.  
Last update: 26/1/2022

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660