

## CO-W121C/P2102 Series

21.5" TFT-LCD Modular and Expandable Panel PC with  
8th Gen. Intel® Core™ U Series Processor



## ALL-NEW OPEN FRAME PANEL PC

| CO-100/P2102 Series Fits Any Machine Perfectly |

### Overview

Cincoze's high-performance open-frame modular panel PCs (CO-W121C/P2102 Series) use Intel® Core U series processors that provide high-performance data processing and graphics computing capabilities with only 15W low power consumption. The CO-100/P2102 series supports CFM technology that extends system functions according to requirements, with options such as Power Ignition Sensing (IGN) and Power over Ethernet (PoE). The series has multiple sizes, display ratios (4:3 and 16:9), and touchscreen options. Its integrated structure, exclusive adjustable mounting bracket, and support for multiple mounting methods to perfectly fit cabinets of different materials and thicknesses. The robust design also meets the application needs of harsh industrial environments.


- 21.5" TFT-LCD with Projected Capacitive Touch
- Onboard 8th Generation Intel® Core™ U Series Processor
- 2x DDR4 SO-DIMM Socket, Supports Up to 2400MHz, 64GB
- Designed with Adjustable Mounting Bracket
- Support Flat / Standard / VESA / Rack Mount
- Front Panel IP65 Compliant
- Wide Operating Temperature
- Cincoze Patent CDS Technology Support

## High Performance and Power Saving

Intel® Core U series processors provide high-performance data processing and graphics computing capabilities with a 15W low power consumption, support for up to 64GB of memory and two 2.5" HDD/SSD.



**15W TDP  
CPU Design**



## Patented CDS Technology

The patented CDS (Convertible Display System) technology makes maintenance easy and offers flexibility for future upgrades. To upgrade the panel size, replace the display module, or to upgrade the system performance, replace the computer module.

Patent No. M482908

## Flexibility for Various Applications

Mini-PCIe and PCI/PCIe expansion slots support data acquisition cards, motion control cards, I/O expansion, and other applications.

[ PCI/PCIe expansion slot available Model : CO- W121C/P2102E ]



## Flexible Design and Easy Installation

Exclusive adjustable mounting bracket with thickness adjustment setting and two panel-locking methods (panel or boss type) make modular panel PC easier and more convenient to integrate into industrial machinery.

Patent Pending

## Integrated Structure

As standard, the open frame modular panel pc can be deployed in equipment machines, but remove the mounting bracket and it becomes a standalone panel pc for use with a VESA mount or in a 19" rack.



## Strong, Reliable and Durable

Meets the requirements for HMI applications in harsh industrial environments: IP65 waterproof and dustproof front panel, fanless, wide temperature (0-70°C), and wide voltage (9-48 VDC).



## CO-W121C Specifications

<b>Display</b>	
LCD Size	• 21.5" (16:9)
Resolution	• 1920 x 1080
Brightness	• 300 cd/m2
Contract Ratio	• 5000 : 1
LCD Color	• 16.7M
Pixel Pitch	• 0.24825 (H) x 0.24825 (V) mm
Viewing Angle	• 178 (H) / 178 (V)
Backlight MTBF	• 50,000 hrs
<b>Touch Screen</b>	
Touchscreen Type	• Projected Capacitive Touch
<b>Physical</b>	
Dimension (W x D x H)	• 550 x 343.7 x 63.3
Weight	• 7.16 kg
Construction	• One-piece and Slim Bezel Design
Mounting Type	• Flat / Standard / VESA / Rack Mount
Mounting Bracket	• Pre-installed Mounting Bracket with Adjustable Design ( Support 11 different stages of adjustment )
<b>Protection</b>	
Ingress Protection	• Front Panel IP65 Compliant * According to IEC60529
<b>Environment</b>	
Operating Temperature	• 0°C to 70°C
Storage Temperature	• -20°C to 70°C
Humidity	• 80% RH @ 40°C (non-condensing)
EMC	• CE, UKCA, FCC, ICES-003 Class A
Safety	• UL, cUL 62368-1 (Pending)

## P2102 Specifications


Model Name	P2102	P2102E
System		
Processor	<ul style="list-style-type: none"><li>Onboard 8th Intel® Core™ U Processors (Whiskey Lake)<ul style="list-style-type: none"><li>Intel® Core™ i5-8365UE Quad Core Processor (6M Cache, up to 4.10 GHz)</li><li>Intel® Core™ i3-8145UE Dual Core Processor (4M Cache, up to 3.90 GHz)</li></ul></li><li>TDP: 15 W</li></ul>	
Memory	<ul style="list-style-type: none"><li>2x DDR4 2400 MHz 260-Pin SO-DIMM Socket</li><li>Support Un-buffered and Non-ECC Type up to 64 GB</li></ul>	
Graphics		
Graphics Engine	<ul style="list-style-type: none"><li>Integrated Intel® UHD Graphics 620</li></ul>	
Maximum Display Output	<ul style="list-style-type: none"><li>Supports Triple Independent Display (1x CDS, 1x VGA, 1x DisplayPort)</li></ul>	
VGA	<ul style="list-style-type: none"><li>1x VGA Connector(1920 x 1200 @60Hz)</li></ul>	
DP	<ul style="list-style-type: none"><li>1x DisplayPort Connector (4096 x 2304 @ 60Hz)</li></ul>	
Audio		
Audio Codec	<ul style="list-style-type: none"><li>Realtek® ALC888, High Definition Audio</li></ul>	
Speaker-out	<ul style="list-style-type: none"><li>1x Speaker-out, Phone Jack 3.5mm</li></ul>	
Mic-in	<ul style="list-style-type: none"><li>1x Mic-in, Phone Jack 3.5mm</li></ul>	
I/O		
LAN	<ul style="list-style-type: none"><li>2x GbE LAN (Supports WoL, Teaming, Jumbo Frame &amp; PXE), RJ45<ul style="list-style-type: none"><li>GbE1: Intel® I219LM</li><li>GbE2: Intel® I210</li></ul></li></ul>	
USB	<ul style="list-style-type: none"><li>3x USB 3.2 Gen2 (Type A), 2x USB 2.0 (Type A)</li></ul>	
Serial Port	<ul style="list-style-type: none"><li>4x RS-232/422/485 with Auto Flow Control Support 5V/12V, DB9</li></ul>	
DIO	<ul style="list-style-type: none"><li>16x Isolated Digital I/O (8in/8out), 20-Pin Terminal Block</li></ul>	
Power Mode Switch	<ul style="list-style-type: none"><li>1x AT/ATX Mode Switch</li></ul>	
Power Switch	<ul style="list-style-type: none"><li>1x ATX Power On/Off Switch</li></ul>	
Reset Button	<ul style="list-style-type: none"><li>1x Reset Button</li></ul>	
Clear CMOS Switch	<ul style="list-style-type: none"><li>1x Clear CMOS Switch</li></ul>	
Remote Power On/Off	<ul style="list-style-type: none"><li>1x Remote Power On/Off Connector, 2-pin Terminal Block</li></ul>	
Power Ignition Sensing	<ul style="list-style-type: none"><li>1x Ignition DIP Switch (12V/24V, need to work with CFM module)</li></ul>	
Storage		
SSD/HDD	<ul style="list-style-type: none"><li>2x 2.5" HDD/SSD Drive Bay (SATA 3.0), Supports RAID 0/1</li></ul>	

Expansion		
Mini PCI Express	• 2x Full-size Mini-PCIe Sockets	
PCI Express		• 1x PCI or 1x PCIe x4 Expansion slot (with Optional Riser Card)
M.2 E Key Socket	• 1x M.2 2230 E Key Socket for Wireless Module, Supports Intel CRF Module	
SIM Socket	• 1 x Front Accessible SIM Socket	
Universal Bracket		• 2x Universal I/O Bracket
CFM (Control Function Module) Interface	• 2x Control Function Module (CFM) Interface	
CDS (Convertible Display System) Technology	• 1x Convertible Display System (CDS) Interface	
Antenna Holes	• 4x Antenna Holes	
Other Function		
Clear CMOS Switch	• 1 x Clear CMOS Switch	
Instant Reboot	• Support 0.2sec	
Watchdog Timer	• Software Programmable Supports 256 Levels System Reset	
Internal Speaker	• AMP 2W + 2W	
OSD Function	• LCD On/Off, Brightness Up, Brightness Down	
Power		
AT/ATX Power	• Support AT, ATX Mode	
Power Input	• 1x 3-pin Terminal Block Connector with Power Input 9~48VDC	
Power Adapter (Optional)	• 1x Optional AC/DC 12V/5A, 60W or 24V/5A 120W	
Physical		
Dimension ( W x D x H )	• 254.5 x 190 x 41.5mm	• 254.5 x 190 x 61 mm
Weight Information	• 2.2 kg	• 2.7 kg
Mechanical Construction	• Extruded Aluminum with Heavy Duty Metal	
Mounting	• Wall / VESA / CDS / DIN Rail	
Physical Design	• Fanless Design • Jumper-less Design	
Reliability & Protection		
Reverse Power Input	• Yes	
Over Voltage Protection	• Protection Range: 51~58V • Protection Type: shut down operating voltage, re-power on at the present level to recover	
Over Current Protection	• 15A	
ESD Protection	• +/-8kV (air), +/-4kV (contact)	
Surge Protection	• 2kV	
CMOS Battery Backup	• SuperCap Integrated for CMOS Battery Maintenance-free Operation	
MTBF	• 231,243 hours	


Operating System		
Microsoft® Windows®	• Windows®10	
Linux	• Supports by project	
Environment		
Operating Temperature	• Ambient with Air Flow: -40°C to 70°C (with Extended Temperature Peripherals)	
Storage Temperature	• -40°C to 70C	
Relative humidity	• 95% RH @ 70°C (Non-condensing)	
Shock	• Operating, 50 Grms, Half-sine 11 ms Duration (w/ SSD, according to IEC60068-2-27)	
Vibration	• Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)	• Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64) • Operating, 1 Grms, 10-500 Hz, 3 Axes (w/ CV-W124 only, according to IEC60068-2-6)
EMC	• CE, UKCA, FCC, ICES-003 Class A	
Safety	• UL, cUL, CB, IEC/EN62368-1	

## CO-W121C/P2102 External Layout


Front I/O

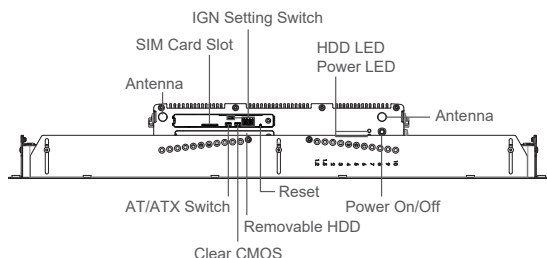


Rear I/O

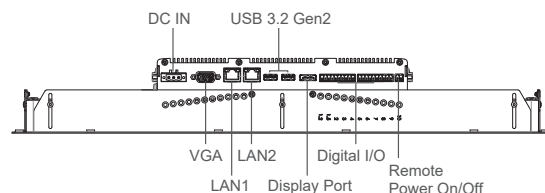

Left I/O




Right I/O




## CO-W121C/P2102E External Layout


Front I/O

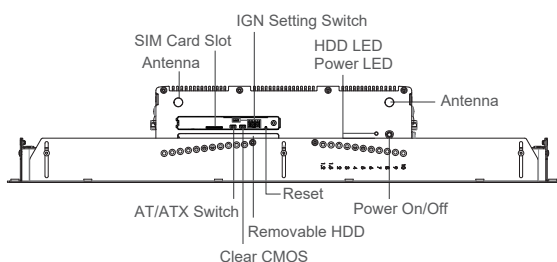


Rear I/O

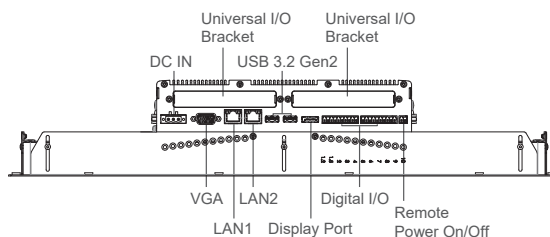


Left I/O

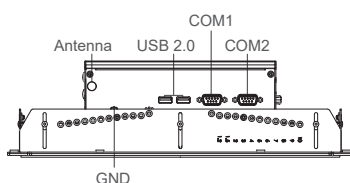


Right I/O



## CO-W121C/P2102 Dimensions

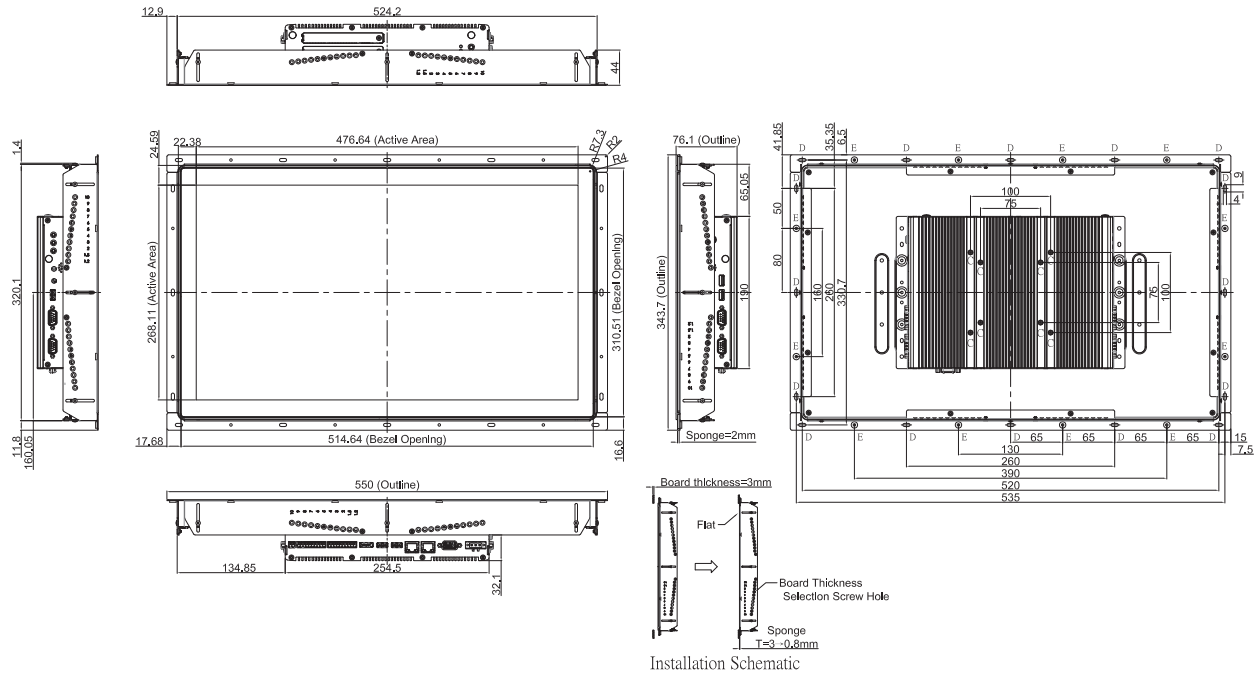

## CO-W121C/P2102E Dimensions

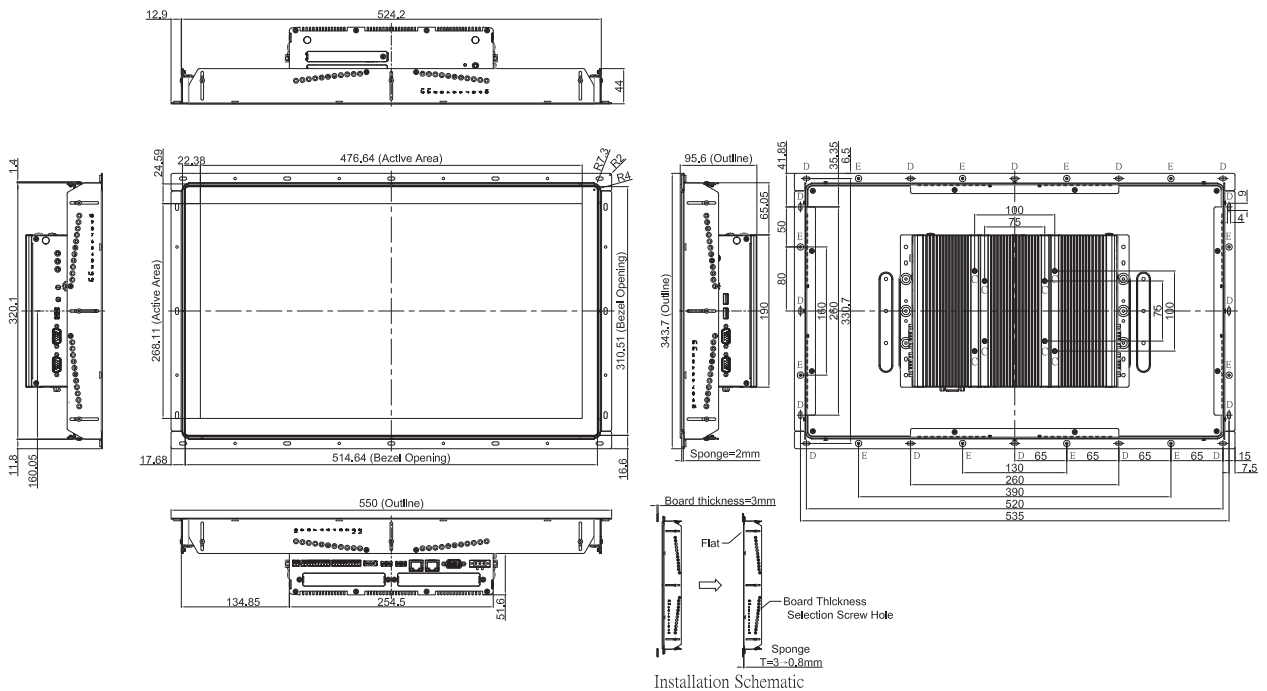

Unit: mm



## Ordering Information

### Available Models

Model No.	Description
CO-W121C-R10/P2102-i5-R10	21.5" TFT-LCD Full HD 16:9 Open Frame Display Modular Panel PC with 8th Gen. Intel Core i5-8365UE Quad Core Processor and P-Cap. Touch
CO-W121C-R10/P2102E-i5-R10	21.5" TFT-LCD Full HD 16:9 Open Frame Display Modular and Expandable Panel PC with 8th Gen. Intel Core i5-8365UE Quad Core Processor and P-Cap. Touch
CO-W121C-R10/P2102-i3-R10	21.5" TFT-LCD Full HD 16:9 Open Frame Display Modular Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and P-Cap. Touch
CO-W121C-R10/P2102E-i3-R10	21.5" TFT-LCD Full HD 16:9 Open Frame Display Modular and Expandable Panel PC with 8th Gen. Intel Core i3-8145UE Dual Core Processor and P-Cap. Touch

### Model Configuration

	CO-W121C	P2102 (i3/i5)	P2102E (i3/i5)
CO-W121C/P2102	V	V	--
CO-W121C/P2102E	V	--	V

V : Compatible

### Package Checklist


• CO-W121C/P2102 Series Panel PC x 1	• Thermal Pad (for CPU Thermal Block) x 1
• Utility DVD Driver x 1	• Screw Pack x 5
• Power Terminal Block Connector x 1	• Remote Power On/Off Terminal Block Connector x 1
• PCI / PCIe Card Installation Kit x 1	• DIO Terminal Block Connector x 2





### Optional Modules and Accessories

Model No.	Description
MEC-COM-M212-DB9	Mini-PCle Module with 2x RS-232 Serial Ports, 1x Standard DB9 Cable (For P2102E Only)
MEC-COM-M334-TDB9	Mini-PCle Module with 4x RS-232/422/485 Serial Ports, 2x Thin DB9 Cable (For P2102E Only)
MEC-LAN-M102-30	Mini-PCle Module with 2x LAN Ports, 2x 30cm (For P2102E Only)
MEC-USB-M102-30	Mini-PCle Module with 2x USB 3.2 Gen1 Ports (For P2102E Only)
CFM-IGN101	CFM Module with Power Ignition Sensing Control Function, 12V/24V Selectable
CFM-PoE04	PoE Control Function Module, Individual Port 25.5W (For P2102 only)
CFM-PoE05	PoE Control Function Module, Individual Port 25.5W (For P2102E only)

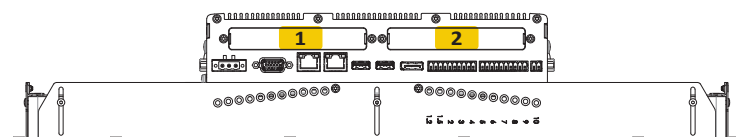Model No.	Description
RC-E4-02	Riser Card with 1x PCIe Slot (For P2102E only)
RC-PI-02	Riser Card with 1x PCI Slot (For P2102E only)
UB1203	Universal Bracket with 2x DB9 Cutout (For P2102E only)
UB1211	Universal Bracket with 2x RJ45 Cutout (For P2102E only)
UB1214	Universal Bracket with 2x USB Cutout (For P2102E only)
URM01	Universal 19" Rack Mount Kit for Industrial Panel PC & Industrial Monitor
GST120A24-CIN	Adapter AC/DC 24V 5A 120W, GST120A24-CIN, wide temp(-30°C ~ +70°C), level VI
GST60A12-CIN1	Adapter AC/DC 12V 5A 60W, GST60A12-CIN1, wide temp(-30°C ~ +70°C)
SL2-SL3	US 2 heads power cord, US B type to IEC C13,SVT 18AWG/3C Black 1.8M
SL6-SL3	EU 2 heads power cord, EU G type to IEC C13,H05VV-F 0.75mm2/3G Black 1.8M
QP026-SL3	UK 2 heads power cord, UK I type to IEC C13,H05VV-F 0.75mm2/3G Black 1.8M

#### Optional Module Configuration (For P2102E only)



Model No.	Description	1	2
 MEC-COM-M212-TDB9/UB1203	Mini-PCle Module with 2x COM Ports, 1x Standard DB9 Cable, 2x Universal Bracket each with 1x DB9 Cutout	V	V
 MEC-COM-M334-TDB9/UB1203	Mini-PCle Module with 4x RS-232/422/485 Serial Ports	V	V
 MEC-LAN-M102-30/UB1211	Mini-PCle Module with 2x LAN Ports, 2x 30cm cable, w/ 1x Universal Bracket with 2x RJ45 Cutout	V	V
 MEC-USB-M102-30/UB1214	Mini-PCle Module with 2x USB 3.2 Gen1 Ports, 1x 30cm cable, 1x Universal Bracket with 2x USB Cutout	V	V

V : Compatible

Updated: Jul. 14, 2022

© Cincoze Co., Ltd. All Rights Reserved. Specifications subject to change without notice. All product names, logos, and brands are the property of their respective owners. All company, product and service names used in this document are for identification purposes only. The use of these names, logos, and brands does not imply endorsement.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660