

# TPPC 3201

31.5" Full-HD Passenger Information Panel PC  
Powered by Intel Atom® x5-E3930 Processor



## Main Features

- 31.5" TFT-LCD FHD 16:9 fanless panel computer
- Powered by Intel Atom® x5-E3930 processor, 1.3GHz
- Wide-range DC input of 9V to 36V DC
- Support ignition control for power on/off delay timing management
- Compliant with IP54 on the front panel
- Tempered glass, surface hardness 8H
- 1 x DDR3L up to 8GB, M.2 (2242) B-Key SSD for storage device
- 1 x mini-PCIe expansion available for wireless communication
- CE/FCC/E/e-Mark

## Product Overview

The 31.5" fanless panel pc, TPPC 3201 is a 31.5" 16:9 TFT-LCD with resolutions to 1920 x 1080 (Full-HD) and industrial motherboard making it the perfect "AIO" in transit panel PC solution. Wide-range power input (9V-36V DC) can let TPPC 3201 to be capable of setting up in various application environment and vehicles, which is included in retail outlets, supermarkets, train station, airport and bus. It is compliant to in-vehicle industrial standard, like E/e-Mark.

## Specifications

### LCD Panel

- LCD size: AUO 31.5", 16:9
- Resolution: Full-HD, 1920 x 1080
- Luminance: 500 nits cd/m2
- Contrast ratio: 3,000
- LCD color: 16.7M
- View angle: 89 (H), 89 (V)
- Backlight: LED

### System

- Intel Atom® x5 E3930 processor, 1.3GHz (burst mode: 1.8GHz)

### System Front

- 1 x Ambient light sensor

### Main Memory

- 1 x 204-pin DDR3L SO-DIMM socket up to 8GB. Support up to 1866 Mhz, non-ECC and unbuffered memory

### Rear I/O

- 1 x Power input connector, 6-pin (9V-36V DC & Ignition control)
- 1 x DB9 COM port for RS232/422/485
- 2 x RJ45 Intel® I210-AT gigabit LAN ports
- 4 x USB 3.0, support USB 2.0
- 1 x HDMI 1.4b (support 4K x 2K @30Hz)
- 1 x Line-in, 1 x Line-out with 16Ω Amplifier

### Audio

- Realtek ALC886 audio codec

### Storage Device

- 1 x M.2 (2242) B key SSD, up to 256G max.
- 1 x 2.5" SATA SSD reserved

### Expansion

- 1 x mini-PCIe full-size connector on board (support PCIe/USB)

### Power Management

- 9V to 36V DC input (UPS: 12V, 24V and 36V)
- Ignition on/off control & programmable on/off delay timing


### Environment

- Vibration
  - IEC60068-2-64
  - Operating: 0.5G, random, 5-500Hz, 1hr/X axis (w/ storage)
  - Operating: 1G, random, 5-500Hz, 1hr/Y, Z axis (w/ storage)
- Drop
  - IEC60068-2-32
  - ISTA-2A STD
  - 20kg (packing weight) & 66cm (falling height)
- Temperature
  - Operating temperature: 0~50°C
  - Storage temperatures: 0~70°C
  - Damp heat test per EN60068-2-30, 45~55°C, 95%, 48Hrs, non-condensing

### Operating System Support

- Win10 IoT Enterprise 64-bit
- Linux Yocto 4.14

www.nexcom.com

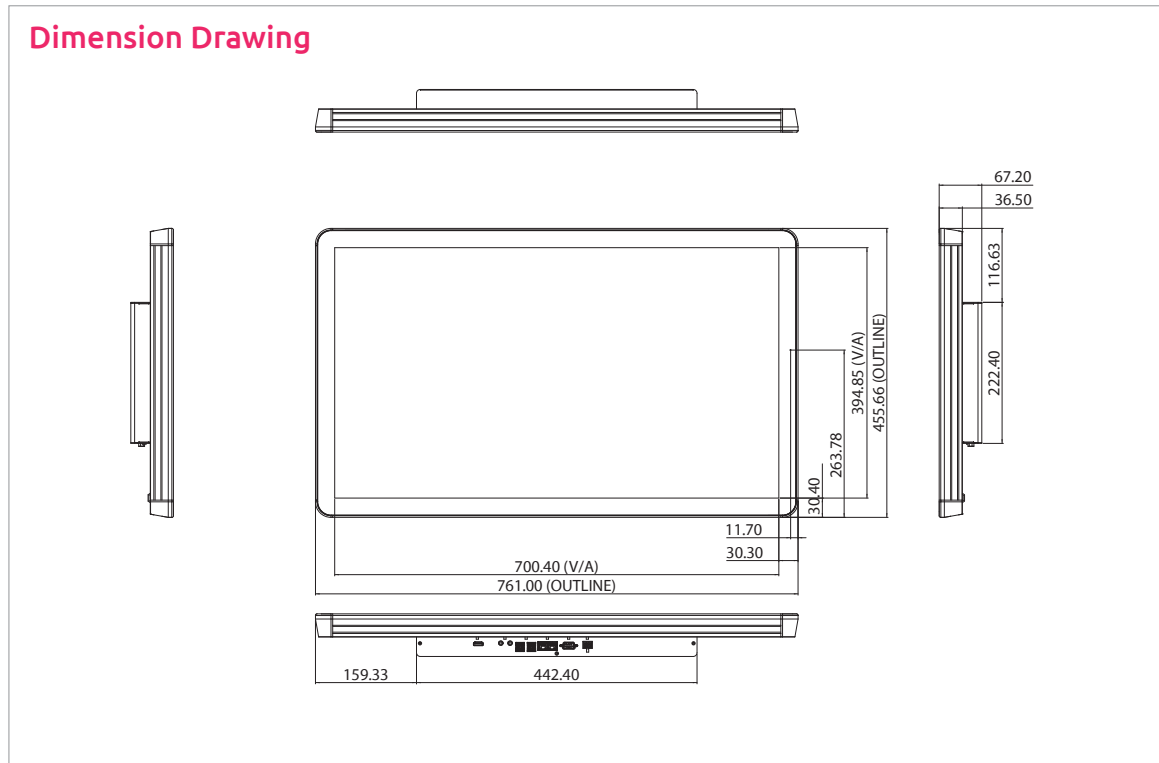

**Mechanical Information**

- Color: black
- VESA mount (200mm x 200mm; 200mm x 400mm)
- Dimension: 761mm (W) x 455.6mm (D) x 67.2mm (H)
- System weight (N.W): 18.5kg, 40.7lb
- Package weight (G.W): 23kg, 50.71lb

**Certification**

- CE (EN55024, EN55032, EN55035)
- FCC Class A (Part 15B)
- E-mark: E-13, 12/24V

**Ordering Information**

- ♦ **TPPC 3201 (P/N: 10ID0320100X1)**  
31.5" TFT-LCD FHD 16:9 Passenger Information Panel PC,  
Intel Atom® x5-E3930

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660