


# ICO100-839

Robust DIN-rail Fanless Embedded System with Intel® Celeron® Processor N3350, 2 COM, LAN, 2 USB and DIO

## Features

- Extreme cost-effective with fanless and cableless design
- Intel® Celeron® processor N3350
- 2 COM, 2 USB and GbE LAN
- 8-bit programmable DIO for IoT gateway applications
- Wide operating temperature range from -40°C to +70°C
- 12 to 24 VDC wide range power input
- OVP, UVP, OCP, RPP power protection design
- AXView 2.0 intelligent remote monitoring software for IIoT

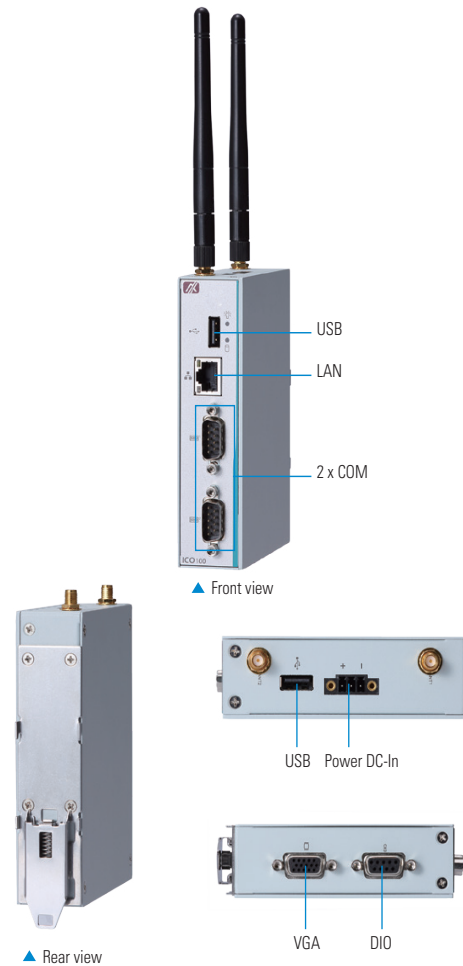

## Specifications

Standard Color	Sliver	
Construction	Extruded aluminum and heavy-duty steel, IP40	
CPU	Intel® Celeron® processor N3350 (1.1 GHz, Dual Core)	
System Board	SBC87839	
System Memory	1 x DDR3L-1866 SO-DIMM, up to 8GB	
BIOS	AMI UEFI BIOS	
System I/O Outlet	Serial	2 x RS-232/422/485 Interface select by BIOS Supports Auto Flow Control in RS-485 mode
	RTC	Battery onboard
	USB	2 x USB 2.0
	Storage	mSATA shared with mPCIe slot (option eMMC flash onboard)
	LAN	1 x 10/100/1000 Mbps Ethernet (Intel® i211-AT for ICO100) (Intel® i210-IT for ICO100-WT) Magnetic isolation protection 1.5KV
	Display	1 x VGA (DB15 connector)
	DIO	1 x DI/DO (8-bit programmable, DB9 female connector) Voltage is 5V TTL-level Programming: I/O sink current is 10mA (max.) Input/output can be programming
	Power Input	1 x DC power input with terminal block

Extension Interface	1 x Full-size PCI Express Mini Card slot with SIM slot (for wireless module) 1 x Full-size PCI Express Mini Card slot with mSATA (for wireless module or mSATA)
Watchdog Timer	255 levels, 1 to 255 sec.
System Indicator	Power, active
Power Supply	Power Input Range: 12 to 24 VDC, 1.15 to 0.62A (13.80 to 14.88W) Protection: OVP (±20%), reverse protection
Operating Temperature	-20°C to +70°C (-4°F to +158°F) -40°C to +70°C (-40°F to +158°F) (ICO100-WT)
Humidity	10% to 95%
Vibration Endurance	2 Gms (5 to 500Hz, amplitude 0.35 mm; operation/storage/transport)
Weight (net/gross)	0.3 kg (0.67 lb)/0.46 kg (1 lb)
Certifications	CE, FCC Class A
Dimensions	31 mm (1.22") (W) x 100 mm (3.93") (D) x 125 mm (4.92") (H)
EOS Support	Windows® 10 IoT, AXView 2.0 Linux support package(by request)

**Ordering Information**


Standard	
ICO100-839-N3350-DC (P/N: E22C100104)	Robust DIN-rail fanless embedded system with Intel® Celeron® processor N3350, 2 COM, LAN, 2 USB and DIO (-20°C to +70°C)
ICO100-839-N3350-WT-DC (P/N: E22C100105)	Robust DIN-rail fanless embedded system with Intel® Celeron® processor N3350, 2 COM, LAN, 2 USB and DIO (-40°C to +70°C)

Optional	
mSATA	
8812C1003A0E	ICO100/ICO120 wall mount bracket kit SFP
8816N3234A0E	3G/GPS UC20G kit for tBOX (3G ANT) (E)
8816N3235A0E	3G/GPS UC20G kit for tBOX (3G/GPS ANT) (E)
8812C3003A0E	SparkLAN WPEA-152GN Wi-Fi kit ICO SFP (E)
8812C3004A0E	SparkLAN WPEA-251N Wi-Fi kit ICO SFP (E)
822C3001060E	LTE SIMCOM SIM7100C (TW) for ICO300 SFP

\* Specifications and certifications may vary based on different requirements.

1
2
<b>3</b>
4
5
6
7
8

**Dimensions**

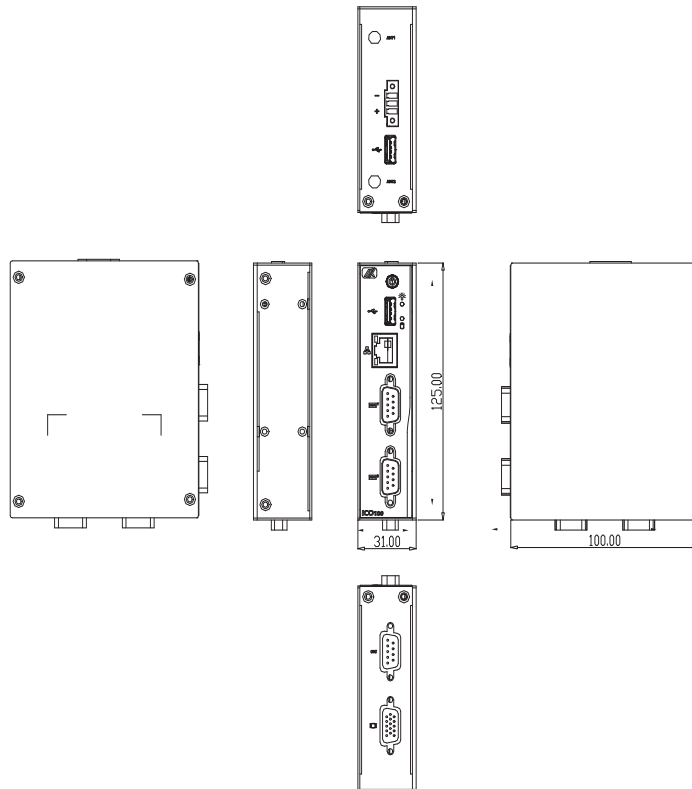

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660