


NanoCOM-BT

COM Express Type 10 with Intel Atom® E/Celeron® Processor N Series Processors

COM Express CPU Modules

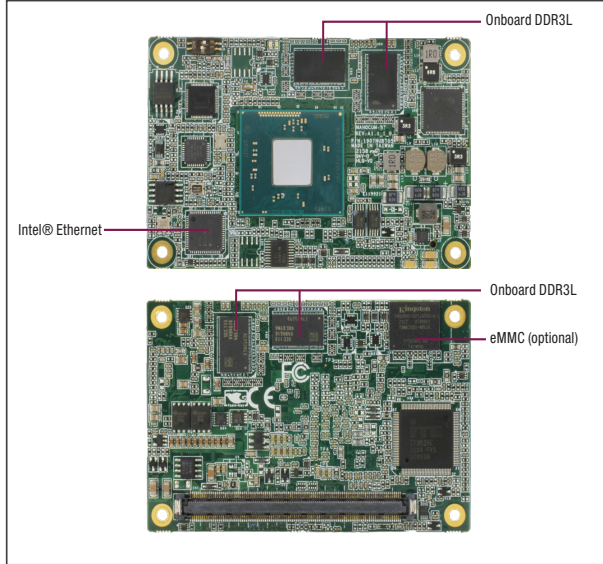

Features

- Onboard DDR3L, up to 2GB
- Onboard eMMC, up to 8GB
- LVDS x 1, DDI x 1
- USB 2.0 x 7, USB 3.2 Gen 1 x 1
- PCIe [x1] x 3
- Intel® I210-AT GbE x 1
- COM Express Type 10, 3.31" x 2.17" (84mm x 55mm)



Specifications

System	
Form Factor	COM Express Mini Size, Type 10
CPU	Intel Atom® Processor E Series: Intel Atom® Processor E3845 (4C/4T, 1.91 GHz, 10W) Intel Atom® Processor E3825 (2C/2T, 1.33 GHz, 6W) Intel® Celeron® Processor N Series: Intel® Celeron® Processor N2930 (4C/4T, 1.83 GHz, 7.5W) Intel® Celeron® Processor N2807 (2C/2T, 1.58 GHz, 4.3W)
Chipset	Integrated with Intel® SoC
Memory	Onboard DDR3L 1333MHz, up to 2GB
Onboard Storage	eMMC, up to 16GB (Optional)
BIOS	AMI UEFI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Dimension	3.31" x 2.17" (84mm x 55mm)
Security	—
Power	
Power Requirement	+12V and +5VSB for ATX, +12V for AT
Power Type	AT/ATX
Power Consumption (Typical)	Intel Atom® Processor E3845, 0.7A @+12V
Display	
Graphics Controller	Intel® HD Graphics
Video Output	Dual Display: DDI x 1, up to 2560 x 1440 18/24-bit Single-Channel LVDS/eDP x 1, up to 1366 x 768
I/O	
Ethernet	Intel® I210-AT/IT GbE x 1
Audio	High Definition Audio Interface
USB Port	USB 2.0 x 7, USB 3.2 Gen 1 x 1
Serial Port	2-Wire UART x 2 (Tx/Rx)
HDD Interface	SATA II x 2
Expansion	PCIe 2.0 [x1] x 3 LPC x 1
GPIO	8-bit

SMBus/I2C	I2C x 1, SMBus x 1
Environment	
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C) Optional: -40°F ~ 185°F (-40°C ~ 85°C)
Storage Temperature	-40°F ~ 185°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
EMC	CE/FCC Class A
OS Support	Windows® 10 (64-bit) Linux Ubuntu 16.04.7/Kernel 4.15.0
Weight	0.15 lb. (0.07Kg)

Packing List

- NANOCOM-BT

Optional Accessories


Part Number	Description
ECB-920A-A11-0001	COMe Type 6/10 Carrier Board. ATX. 2.5GbE. 8USB. 2COM. 4SATA. PCIe. AT/ATX. Rev. A1.1
NANOCOM-BT-HSP02	Heat Spreader. 84 x 55 x 11mm. Black. NanoCOM-BT
NanoCOM-FAN01	Cooler. 84 x 55 x 22.2mm. use w/HSP
NANOCOM-HSK01	Heatsink. 84 x 55 x 26.5mm. use w/HSP

NanoCOM-BT


04

COM Express CPU Modules

Block Diagram Unit: mm

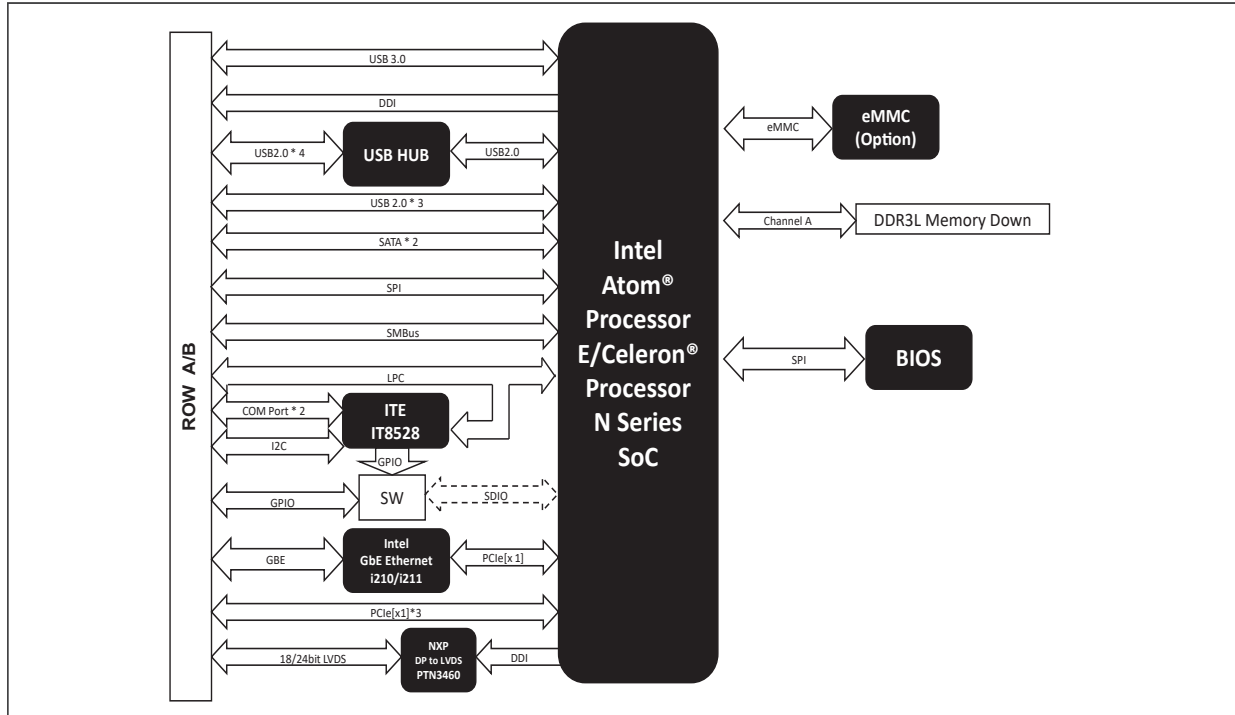

Dimension Unit: mm

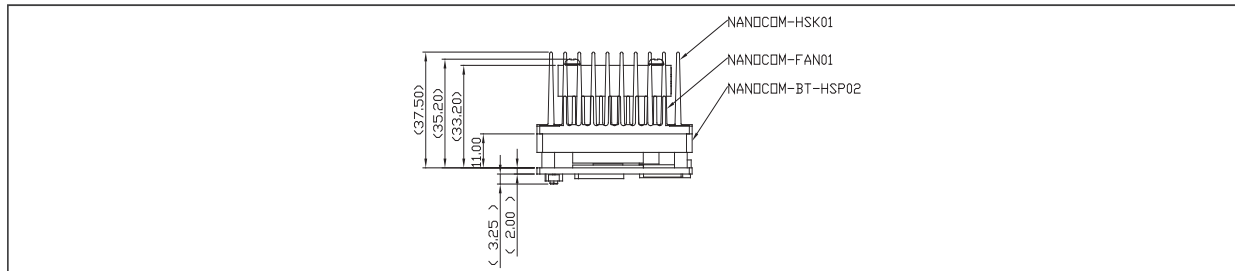

Ordering Information

Part Number	COM Express Type	CPU	Memory	ECC support	Display	Storage	LAN	USB	UART	Expansion	Power	Temperature	Others
NANOCOM-BT-A11-0001	Type 10	Intel® Celeron® Processor N2930	2GB Onboard DDR3L	—	LVDS x 1, DDI x 1	SATA III x 2	Intel® I210-AT x 1	USB 3.2 Gen 1 x 1 USB 2.0 x 7	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 3	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-BT-A11-0002	Type 10	Intel® Celeron® Processor N2807	2GB Onboard DDR3L	—	LVDS x 1, DDI x 1	SATA III x 2	Intel® I210-AT x 1	USB 3.2 Gen 1 x 1 USB 2.0 x 7	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 3	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-BT-A11-0003	Type 10	Intel Atom® Processor E3845	2GB Onboard DDR3L	—	LVDS x 1, DDI x 1	SATA II x 2, 8GB eMMC	Intel® I210-AT x 1	USB 3.2 Gen 1 x 1 USB 2.0 x 7	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 3	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus
NANOCOM-BT-A11-0006	Type 10	Intel Atom® Processor E3825	2GB Onboard DDR3L	—	LVDS x 1, DDI x 1	SATA II x 2, 8GB eMMC	Intel® I210-AT x 1	USB 3.2 Gen 1 x 1 USB 2.0 x 7	2-Wire UART x 2 (Tx/Rx)	PCIe [x1] x 3	12V	0°C ~ 60°C	LPC, GPIO 8-bit, I2C, SMBus

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660