

ADAM-4016 ADAM-4017

1-ch Analog Input/Output Module

8-ch Analog Input Module



ADAM-4016



Specifications

General

- Connectors 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- Power Consumption 2.2 W @ 24 V_{DC}
- Watchdog Timer System (1.6 s)
- Supported Protocols ASCII command

Analog Input

- Channels 1 differential
- Input Impedance Voltage: 2 MΩ
Current: 125 Ω (Added by users)
- Input Type mV, mA
- Input Range ±15 mV, ±50 mV, ±100 mV, ±500 mV, ±20 mA

Analog Output

- Channels 1
- Accuracy 0.05% of FSR
- Output Type V
- Output Range 0 ~ 10 V
- Drift ±50 ppm/°C
- Drive Current 30 mA
- Isolation Voltage 3,000 V_{DC}

Digital Output

- Channels 4, open collector to 30 V, 30 mA max. load
- Power Dissipation 300 mW

Common Specifications

General

- Power Input Unregulated 10 ~ 30 V_{DC}
- Connectors 2 x plug-in terminal block (#14 ~ 22 AWG)


Analog Input

- Accuracy Voltage mode: ±0.1% or better
Current mode: ±0.2% or better
- Resolution 16-bit

- Sampling Rate 10 sample/second (total)
- Isolation Voltage 3,000 V_{DC}
- CMR @ 50/60 Hz 120 dB
- NMR @ 50/60 Hz 100 dB
- Span Drift ±25 ppm/°C
- Zero Drift ±6 μV/°C

Environment

- Humidity 5 ~ 95% RH
- Operating Temp. -10 ~ 70°C (14 ~ 158°F)
- Storage Temp. -25 ~ 85°C (-13 ~ 185°F)

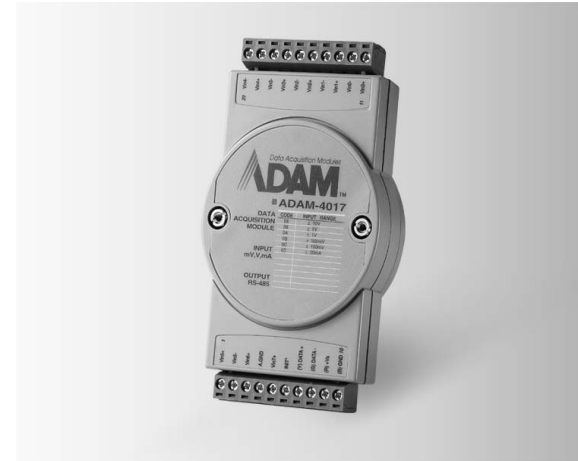

ADAM-4017



Specifications

General

- Power Consumption 1.2 W @ 24 V_{DC}
- Watchdog Timer System (1.6 second)
- Supported Protocols ASCII command

Analog Input

- Channels 6 differential and 2 single-ended
- Input Type mV, V, mA
- Input Range ±150 mV, ±500 mV, ±1 V, ±5 V, ±10 V, ±20 mA

- 1 Motion Control
- 2 Hazardous Location
- 3 Energy Automation
- 4 Building Automation Systems
- 5 Automation Software
- 6 Operator Panels
- 7 Automation Panel PCs
- 8 Industrial Monitors
- 9 Industrial Ethernet
- 10 Device Servers & Gateways
- 11 Serial Communication Cards
- 12 Embedded Auto. Computers
- 13 PACs
- 14 M2M I/O
- 15 Distributed Nano Controllers
- 16 RS-485 I/O
- 17 Ethernet I/O
- 18 DAQ Boards

Ordering Information

- ADAM-4016 1-ch Analog Input/Output Module
- ADAM-4017 8-ch Analog Input Module

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660