

# Rugged Handheld Device 7"

M700D

Model Name: M700D

#### **Product Features:**

- Intel<sup>®</sup> Atom<sup>™</sup> Processor Dual Core N2600 1.6 GHz
- 7"WSVGA(1024x600)TFT LCD Display
- · Compliant with MIL-STD-810G
- Projected Capacitive Multi-Touch Screen
- · 2.0M Camera in Rear Side (with LED auxiliary light, Auto Focus)
- · G-sensor and Light sensor
- Built-in WLAN 802.11 a/b/g/n & Bluetooth 4.0 & Neo-6 **GPS**
- Support Windows® Embedded Standard 7 Operating System








### **Product Specifications:**

	Processor	Intel® Atom™ Processor N2600 1.6 GHz
0	System Memory	2 GB DDR3 SDRAM(upgradable to 4 GB)
System Specification		,
Specification	Storage	32GB SSD(upgradable to 128 GB SSD)
	Operating System	Windows® Embedded Standard 7 (WES7P)
	Size	7"
Display	Resolution	1024 * 600
Specification	Brightness	500nit (typ.)
	Touch	Projected Capacitive Touch
	WLAN	Support 802.11 a/b/g/n 2T2R
Wireless	Bluetooth	Bluetooth 4.0 + Class I
Communication	WWAN	Optional 3G(support HSPA/ UMTS / GPRS / WCDMA / GSM)
	GPS	Neo-6 GPS Module
	Dimensions (W x L x H)	212.4 x 132.8 x 25 mm (Standard)
	Weight	770g (Standard) / 1070g (with second battery)
	Operation Temperature	-20°C to 60°C (AC mode), -10°C to 50°C (Battery mode)
	Operation Humidity	95% RH (non condensing)
Mechanical and	IP Proof	IP65
Environment	Shock	MIL-STD-810G Method 516.6
	Vibration	MIL-STD-810G Method 514.6
	Drop	MIL-STD-810G Method 516.6, 4 ft, Free to concrete
	Certifications	CE, FCC
I/O Connectors	External I/O	1 x USB 2.0 A Type 1 x Headset jack 1 x 2.5Ø 12V DC Power Input 1 x SIM Slot 1 x Nicro SD Card 1 x Docking Port (For charge and USB) 1 x Secondary Battery Connector
	Internal Audio Device	1.2W Speaker
	Power input	12V DC in
	Power consumption	11.5W (under full loading)
Power Management	Battery	7.4V 2270mAh Li-Poly rechargeable battery 2S1P 7.4V 5300mAh Hotswap second battery 2S1P
Management	Battery Operating Time	Main Battery: 3hrs* With Second Battery: 10hrs*
	Adapter	50W Adapter
Field Service Features	Camera	2.0M pixel Camera with LED auxiliary light(Rear Side , with Auto Focus)



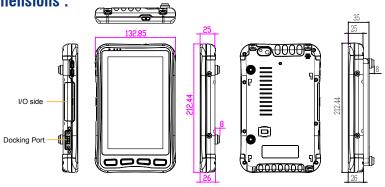

\* Note: Measured at dimming LCD brightness. Varies depending on the usage conditions, or when an external device is attached.

	Accessories:		
		Quick Start Guide	
	Default	User Manual	
	Delault	50W Adapter	
		5300mAh Second battery	

Order Information:			
Model Name	Configuration		
M700D	Standard		
M700D-3	with 3G card		



Rugged Mobile Solution Revised date: 22-Apr-2016 V1.1



# **Assured Systems**

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

## US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

### **EMEA**

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660