


# IMB-1232-WV

Mini-ITX Motherboard

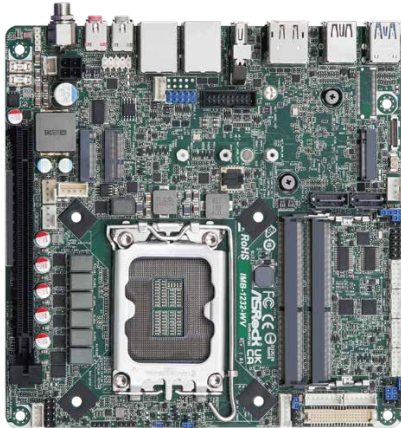

## KEY FEATURES

- Intel® 13th/12th Gen (Raptor Lake-S/Alder Lake-S) Core™ Processors with H610 chipset
- 2 x 260-pin SO-DIMM DDR4 3200 MHz , up to 64GB (32GB per DIMM)
- 1 x PCIe x16 (Gen4), 2 x USB 3.2 Gen2, 1 x USB 3.2 Gen1, 5 x USB 2.0, 1 x M.2 Key B, 1 x M.2 Key E, 1 x M.2 Key M, 4 x COM, 2 x SATA3
- 2 x Intel 2.5 Gigabit LAN
- Supports Triple display, 1 x HDMI 2.0b, 2 x DP1.4a, 1 x LVDS, 1 x eDP1.4b
- TPM 2.0 onboard IC
- 12~28V DC-In (Lockable DC Jack)

## SPECIFICATIONS

### Form Factor

Dimensions (LxWxH)	Mini-ITX (6.7-in x 6.7-in x 1.0-in, 17.0 cm x 17.0 cm x 2.5 cm)
--------------------	---

### Processor System

CPU	Intel® 13th/12th Gen (Raptor Lake-S/Alder Lake-S) Core™ Processors, up to 65W
Chipset	Intel® H610
Socket	LGA1700
BIOS	AMI SPI 256 Mbit

### Memory

Technology	Dual Channel DDR4 3200 MHz
Capacity	64 GB (32 GB per DIMM)
Socket	2 x 260-pin SO-DIMM

### Graphics

Controller	Intel® UHD Graphics
HDMI	HDMI 2.0b Max resolution up to 4096x2160@60Hz
DisplayPort	DisplayPort 1.4a, DP++ Max resolution up to 4096x2160@60Hz
LVDS	Dual channel 24 bit up to 1920x1200@60Hz
eDP	eDP1.4b Max resolution up to 4096x2160@60Hz
MultiDisplay	Triple Display

### Expansion Slot

PCIe	1 x PCIe x16 (Gen4)
M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless 1 x M.2 (Key B, 3042/3052) with PCIe x1/USB3.2 Gen1/USB 2.0 and SIM for 4G/5G
SIM Socket	1 x Socket connected to M.2 Key B

### Audio

Interface	Realtek ALC897, High Definition Audio. Line-out, Mic-in
-----------	---

### Ethernet

Controller/ Speed	LAN1: Intel® I225LM with 10/100/1000/2500 Mbps LAN2: Intel® I225LM with 10/100/1000/2500 Mbps
Connector	2 x RJ-45

### Rear I/O

HDMI	1 x HDMI 2.0b
DisplayPort	2 x DP 1.4a++
Ethernet	2 x 2.5 Gigabit LAN
USB	2 x USB 3.2 (Gen2) 2 x USB 2.0
Audio	2 (Mic-in, Line-out)

### Internal Connector

USB	1 x USB 3.2 Gen1 (1 x USB 3.2 header) 3 x USB 2.0 (1 x 2.54 pitch header)
COM	COM1, COM2 (RS-232/422/485) COM3, COM4 (RS-232)
GPIO	4 x GPI, 4 x GPO
TPM	TPM 2.0 onboard IC
LVDS	1
eDP	1
SATA PWR Output	1
Speaker Header	1

### Storage

M.2	1 x M.2 (Key M, 2242/2260/2280) with PCIe Gen3 x4 for SSD
SATA	2 x SATA3 (6Gb/s)

### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ..., 255sec

### Power Requirements

Input PWR	12~28V DC-In with 4-pin wafer PWR cable or DC Jack(Screw type)
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

### Environment

Operating Temp	0°C ~ 70°C
Storage Temp	-40° C ~ 85° C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660