

Rugged Embedded | Machine Vision | Surveillance/Video Analytics



# POC-300 Series

Intel® Apollo Lake Pentium® N4200 and Atom™ E3950 Ultra-Compact DIN-rail Controller with GbE, PoE and USB3.0



CE FC

## Key Features

- Intel® Apollo Lake Pentium® N4200 and Atom™ E3950 quad-core processor
- Fanless, rugged and wide temperature operation (-25 °C to 70 °C)
- One GbE port and two Gigabit PoE+ ports
- Two USB3.0 and two USB2.0 ports
- DVI + VGA dual display outputs
- Front-accessible I/O
- DIN-rail mounting design
- MezzIO™ interface compatible

## Introduction

Experience the giant leap in performance of Intel® Apollo Lake Pentium® and Atom™ platform! POC-300 series features the latest Pentium® N4200 and Atom™ x7-E3950 quad-core processors, which offers up to 1.5 times of CPU performance and 3 times the GPU performance improvement compared to previous generation Atom™ E3845 CPU.

POC-300 series have an ingenious mechanical design that combines DIN-rail mounting chassis with front-accessible I/O in an ultra-compact enclosure. They have rich computer-like I/Os such as GbE, USB3.0/ 2.0, COM ports and mSATA storage, in a compact footprint that measures just 5.6 x 15 x 11 cm. IEEE 802.3at PoE+ function is also available on 2 of the 3 GbE ports to power cameras for machine vision or surveillance applications. POC-300 series features Neosys' MezzIO™ interface for easy function expansion via versatile MezzIO™ modules.

With Neosys' proven fanless design heritage, the POC-300 series thrive in harsh environments. Featuring rich I/Os, advanced CPU and compact size, POC-300 series are compelling fanless controllers beneficial for various industrial applications.

## Specifications

	POC-300	POC-310	POC-320	POC-330
<b>System Core</b>				
Processor	Intel® Atom™ E3950 1.6/ 2.0 GHz quad-core processor		Intel® Pentium® N4200 1.1/ 2.5 GHz quad-core processor	
Graphics	Integrated Intel® HD Graphics 505			
Memory	Up to 8GB DDR3L-1866 (single SO-DIMM slot)			
<b>Panel I/O Interface</b>				
Ethernet	3x Gigabit Ethernet ports by Intel® I210 GbE controller			
PoE	IEEE 802.3at PoE+ on port #2 and #3	-	IEEE 802.3at PoE+ on port #2 and #3	-
Video Port	VGA and DVI dual display outputs via DVI-I connector			
USB	2x USB3.0 ports and 2x USB2.0 ports			
Serial Port	1x Software-programmable RS-232/ 422/ 485 ports (COM1) 3x 3-wire RS-232 ports (COM2/ 3/ 4) or 1x RS-422/ 485 port (COM2)			
Audio	1x Mic-in and 1x speaker-out			
<b>Internal I/O Interface</b>				
Mini-PCIe	1x full-size mini PCI Express slot with USIM socket			
Expandable I/O	1x MezzIO™ expansion interface for Neosys MezzIO™ modules			
<b>Storage Interface</b>				
mSATA	1x half-size mSATA port			
<b>Power Supply</b>				
DC Input	1x 3-pin pluggable terminal block for 8-35V DC input			
<b>Mechanical</b>				
Dimension	56 mm (W) x 108 mm (D) x 153 mm (H)			
Weight	0.96 kg (incl. CPU, memory and HDD)			
Mounting	DIN-rail mount (standard) or wall-mount (optional)			

	POC-300	POC-310	POC-320	POC-330
<b>Environmental</b>				
Operating Temperature	-25°C ~ 70°C with SSD, 100% CPU loading */*** -10°C ~ 50°C with HDD, 100% CPU loading */***			
Storage Temperature	-40°C ~ 85°C**			
Humidity	10%~90% , non-condensing			
Vibration	Operating, 5 Grms, 5-500 Hz, 3 Axes (w/ SSD, according to IEC60068-2-64)			
Shock	Operating, 50 Grms, Half-sine 11 ms Duration (w/ SSD, according to IEC60068-2-27)			
EMC	CE/FCC Class A, according to EN 55022, EN 55024 & EN 55032			

\* The 100% CPU/GPU loading for high temperature test is applied using Passmark® BurnInTest™ v8.0.

For detail testing criteria, please contact Neosys Technology


\*\* For sub-zero operating temperature, a wide temperature HDD drive or Solid State Disk (SSD) is required.




▲ POC-300 with MezzIO™ - R11 and 2.5" HDD

POC-300 Series

## Appearance

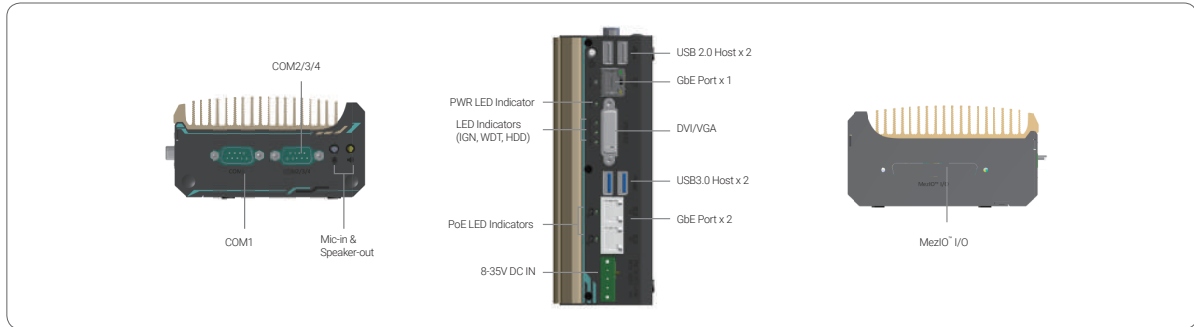

## Dimensions

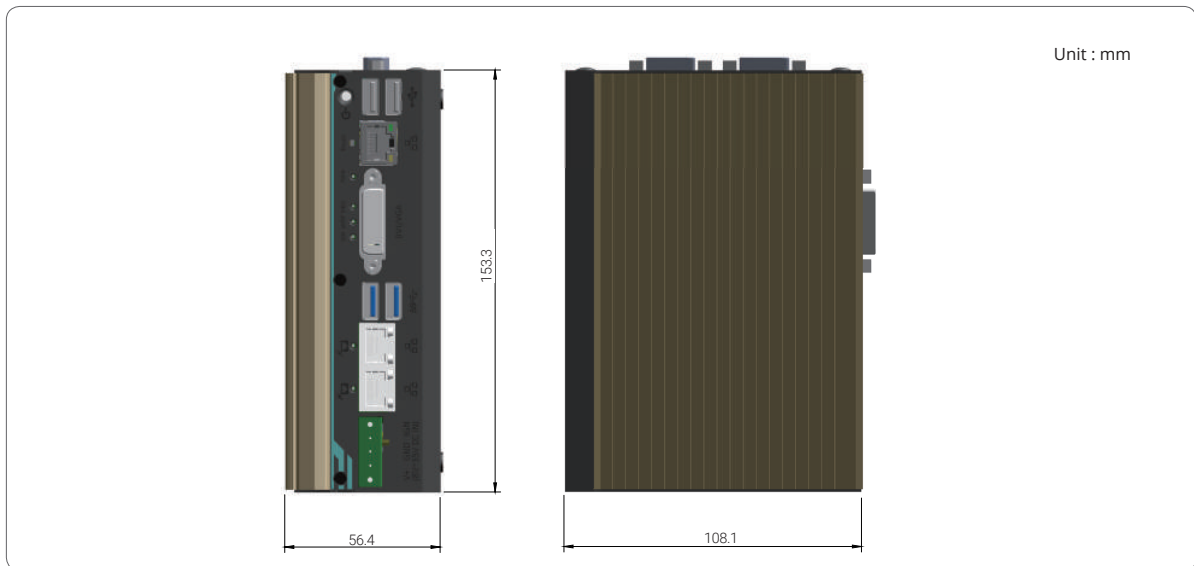

## Ordering Information

Model No.	Product Description
<b>POC-300</b>	Intel® Apollo Lake Atom™ E3950 ultra-compact DIN-rail controller with 1xGbE, 2x PoE+ and 2x USB3.0
<b>POC-310</b>	Intel® Apollo Lake Atom™ E3950 ultra-compact DIN-rail Controller with 3xGbE and 2x USB3.0
<b>POC-320</b>	Intel® Apollo Lake Pentium® N4200 ultra-compact DIN-rail controller with 1xGbE, 2x PoE+ and 2x USB3.0
<b>POC-330</b>	Intel® Apollo Lake Pentium® N4200 ultra-compact DIN-rail controller with 3xGbE and 2x USB3.0

### Ordering Model Matrix

Pre-installed MeziO Controller	MeziO-R11	MeziO-R12
POC-300	POC-301	POC-302
POC-310	POC-311	POC-312
POC-320	POC-321	POC-322
POC-330	POC-331	POC-332

## Optional Accessories

<b>PA-60W-OW</b>	60W AC/DC power adapter with 12V, 5A DC output, cord end terminals for terminal block. Operating temperature : -30 to 60 °C
<b>Wmkit-V-POC300</b>	Wall mounting assembly for POC-300 series, vertical type
<b>Wmkit-H-POC300</b>	Wall mounting assembly for POC-300 series, horizontal type
<b>Cbl-DB9F-3DB9M-10CM</b>	1x DB9 (Female) to 3x DB9 (Male), length: 10CM

### MeziO™ Modules

<b>MeziO™-C180</b>	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-232 ports
<b>MeziO™-C181</b>	MeziO™ module with 4x RS-232/ 422/ 485 ports and 4x RS-422/ 485 ports
<b>MeziO™-D220</b>	MeziO™ module with 8-CH isolated digital input and 8-CH isolated digital output
<b>MeziO™-D230</b>	MeziO™ module with 16-CH isolated digital input and 16-CH isolated digital output
<b>MeziO™-V20</b>	MeziO™ module with ignition power control function and 1x mini-PCIe socket for in-vehicle usage
<b>MeziO™-U4</b>	MeziO™ module with 4x USB
<b>MeziO™-R11</b>	MeziO™ module with SATA port for 2.5" HDD/ SSD
<b>MeziO™-R12</b>	MeziO™ module with SATA port for 2.5" HDD/ SSD, 4-CH isolated DI and 4-CH isolated DO

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660