

# APPD 1700-1

17" IP65 Industrial 4:3 SXGA LCD Flush Touch Monitor



## Main Features

- IP65 compliant plastic front bezel with Flush panel by 5-wire touch screen
- Triple display input interface: analog VGA/DVI-D/DisplayPort
- Shares identical appearance with APPC series
- Dual touch screen interface: RS232 and USB (optional)
- Ultra slim in depth
- Multiple mounting way for easy integration

## Product Overview

17" 4:3 LCD display APPD 1700-1 is based on a 5-wire resistive touch screen. It has 350 nits brightness and can support resolutions up to 1280 x 1024. APPD 1700-1 is ideal for space-critical environments where systems and displays are kept apart. In addition, APPD 1700-1 adopts a flush panel design and has IP65 front panel. APPD 1700-1 provides prevailing video interfaces: VGA, DVI and DisplayPort, supporting both digital and analog signals; touch screen can be connected with RS232 or USB ports. Moreover, APPD 1700-1 supports 24VDC  $\pm 20\%$  power input and offers panel mount and VESA mount, allowing users to choose the mounting method that meets their situation. APPD 1700-1 is the best solution for NEXCOM NISE fanless computer, NViS security surveillance series and APPC panel PC when a second display is required.

## Specifications

### Panel

- LCD size: 17", 4:3
- Resolution: SXGA 1280 x 1024
- Luminance: 350cd/m<sup>2</sup>
- Contrast ratio: 800
- LCD color: 16.7M
- Viewing angle: 60 (U), 80 (D), 80 (L), 80 (R)
- Backlight: LED

### Touch Screen

- 5-Wire resistive (flush panel type)
- Light transmission: 81%
- Interface: USB and RS232 (optional)

### Rear I/O

- Touch interface port: RS232 (1 x DB9)/USB type A
- Video port: VGA (1 x DB15)/DVI-D (1 x DVI-I connector)/DisplayPort
- DC power input connector: 3-pin Phoenix terminal blocks

### OSD Function

- OSD keypad

### Mechanical & Environment


- Color: Pantone black and black silver chassis box
- IP protection: IP65 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power
  - Power input: 24VDC  $\pm 20\%$
  - Optional 24V, 60W AC/DC power adapter w/o power cord
- Vibration
  - IEC 68 2-64
  - 2Grms @ sine, 5~500Hz, 1hr/axis (operating)
  - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock
  - IEC 68 2-27
  - 20G@wall mount, half sine, 11ms
  - Operating temperature: -20°C~60°C
  - Storage temperature: -20°C~75°C
- Operating humidity: 10%~90% relative humidity, non-condensing limits to be at 90% RH at max 50°C
- Dimension: 410.42 x 340.31 x 55.9mm
- Weight: 4.8 kg

### Certifications

- CE approval
- FCC Class B

[www.nexaiot.com](http://www.nexaiot.com)

## Dimension Drawing

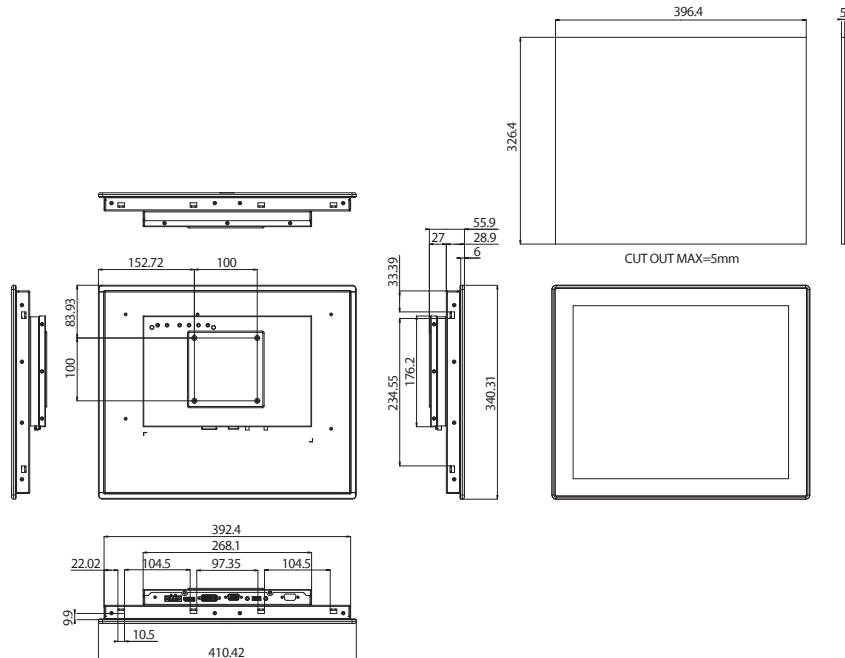

## Ordering Information

- ◆ **APPD 1700-1 (P/N: 10IA0170000X0)**  
17" SXGA industrial 4:3 LCD flush touch monitor with VGA, DVI-D and DisplayPort, 24VDC input, RS-232 and USB touch screen

### Options

- 24V, 60W AC/DC power adapter w/o power cord  
(P/N: 7400060054X00)
- 1.8m DVI-D male to DVI-D male cable  
(P/N: 603DVI0007X00)

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660