

# IPPD 2100P

21.5" IP66 Heavy Industrial 16:9 WXGA Zero Bezel Flush Touch Monitor



## Main Features

- IP66 compliant and metal housing with robust aluminum front zero bezel for harsh environment
- 10 points P-Cap multi-touch with zero bezel flush front design
- 3 display input interface: analog VGA/DVI-D/DisplayPort
- Shares identical appearance with IPPC series
- Ultra slim in depth
- OSD multi-language function
- All connectors with lock
- Mounting support: panel/wall/stand/VESA 100mm x 100mm
- Wide range power input 12~24VDC

## Product Overview

21.5" 16:9 LCD display IPPD 2100P is based on a ten points P-Cap multi-touch screen with resolution up to 1920 x 1080 (Full HD) Panel. IPPD 2100P has system grade grounding protection which means chassis grounding and power grounding design to avoid in-rush current damage monitor. IPPD 2100P is ideal for space-critical environments where systems and displays are kept apart. In addition, IPPD 2100P adopts zero bezel flush panel design and has IP66 front panel. IPPD 2100P provides prevailing video interface: VGA, DVI-D and DisplayPort, supporting both digital and analog signals. Moreover, IPPD 2100P supports 12~24VDC power input and offers panel mount and VESA mount, allowing users to choose the mounting method that meets their situation. IPPD 2100P is the best solution for NEXCOM NISE fanless computer, NVIS security surveillance series and APPC/IPPC panel PC when a second display is required.

## Specifications

### Panel

- LCD size: 21.5", 16:9
- Resolution: full HD 1920 x 1080
- Luminance: 300cd/m<sup>2</sup>
- Contrast ratio: 5000
- LCD color: 16.7M
- Viewing angle: 89 (U), 89 (D), 89 (L), 89 (R)
- Backlight: LED

### Touch

- Ten points P-Cap (projected capacitive touch)
- Touch light transmission: 87%
- Anti-scratch surface: 7H hardness
- Touch interface: USB
- Windows 8 compliance

### Rear I/O

- Touch interface port: USB with Lock
- Video port: VGA (1 x DB15)/DVI-D (1x DVI-D connector)/DisplayPort
- DC power input connector: 3-pin PHOENIX terminal blocks

### OSD Function

- OSD keypad
- Multilanguage OSD

### Mechanical & Environment

- Color: Pantone 432C\RAL 70 24 front bezel
- IP protection: IP66 front
- Mounting: panel/ wall/ stand/ VESA 100mm x 100mm
- System with panel mounting kit w/o panel mounting hole
- Power input: 12~24VDC
- Power adapter: optional AC to DC power adapter (+12V, 60W)
- Vibration:
  - IEC 68 2-64
  - 2Grms @ sine, 5~500Hz, 1hr/axis (operating)
  - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
  - IEC 68 2-27
  - HDD: 20G@wall mount, half sine, 11ms
- Operating temperature: -10°C to 60°C
- Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing
- Dimension: 562.4 x 382.4 x 50.85mm
- Weight: 7.87Kg


### Certifications

- CE (including EN61000-6-1/EN61000-6-2/EN61000-6-3/EN61000-6-4)
- FCC Class B

www.nexcom.com



## Dimension Drawing

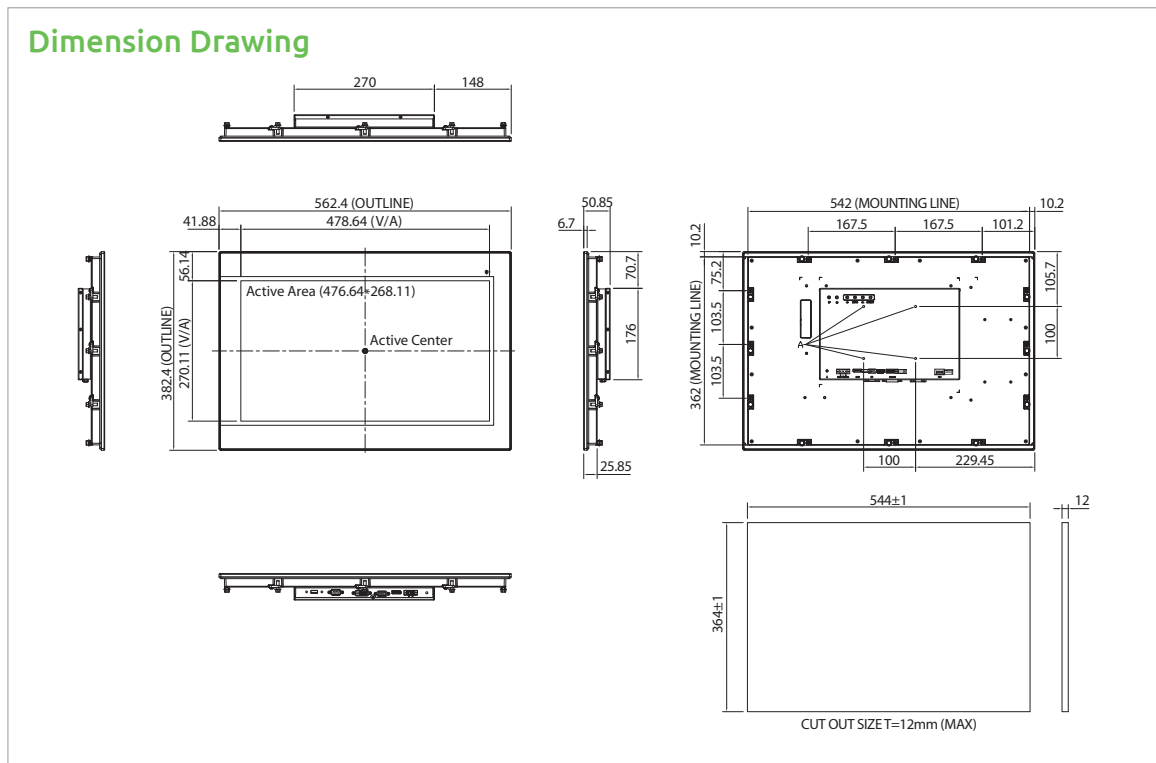

## Ordering Information

### Barebone

- **IPPD 2100P-B (P/N: 10IZ2100P01X0)**  
21.5" full HD heavy industrial 16:9 LED backlight P-Cap touch monitor with VGA, DVI-D and DisplayPort input, 12~24VDC input

### Option

- **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060031X00)**
- **1.8m DVI-D male to DVI-D male cable (P/N: 603DVI0007X00)**
- **1.8m DisplayPort cable (P/N: 6030000122X00)**

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660