



3rd/2nd Gen Intel® Core™  
Modular-Designed Embedded System

## EC300 Series




### ► Features


- Fanless, compact design for industrial applications
- Supports DDR3/DDR3L SODIMM up to 16GB
- Up to 2x 2.5" SATA drive bay, 1 CF socket
- Supports mSATA via the mini PCIe slot




### ► Panel

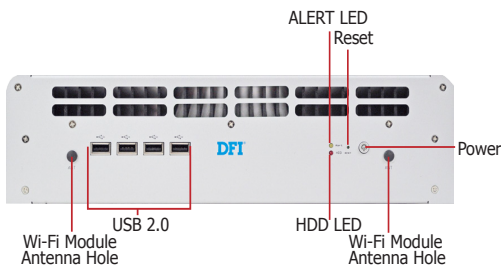


Front View

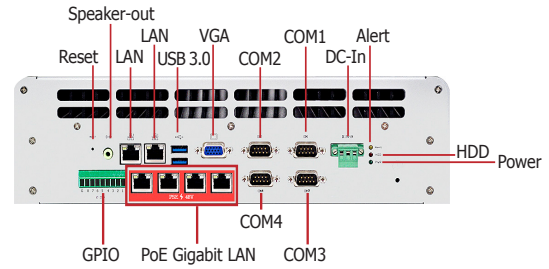


EC300-CR4866 Rear View

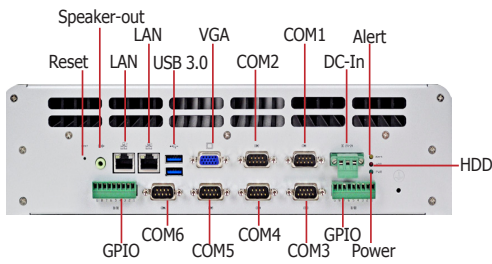


EC300-CR6G60 Rear View

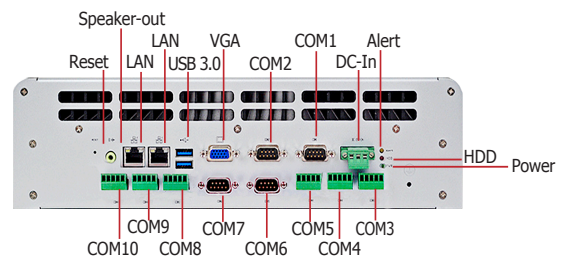

EC300-CRA060 Rear View

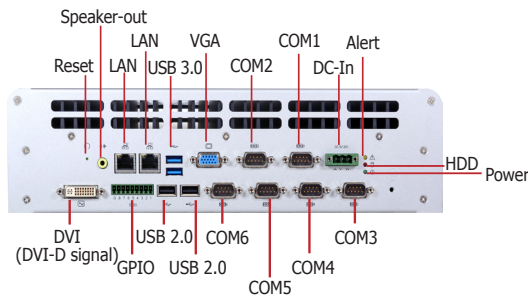

EC300-CR6881 Rear View

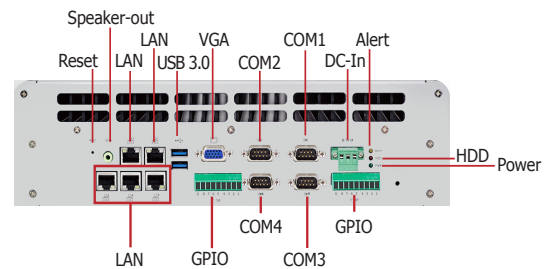

EC300-CR4G65 Rear View

**3rd/2nd Gen Intel® Core™  
Modular-Designed Embedded System**



**EC300 Series**

**Specifications** \* Optional and is not supported in standard model. Please contact your sales representative for more information.

**PROCESSOR SYSTEM**

- 3rd Generation Intel® Core™ processors (22nm process technology)
  - Intel® Core™ i7-3610QE (6M Cache, up to 3.3 GHz); 45W
  - Intel® Core™ i5-3610ME (3M Cache, up to 3.3 GHz); 35W
  - Intel® Core™ i3-3120ME (3M Cache, 2.4 GHz); 35W
- 2nd Generation Intel® Core™ processors (32nm process technology)
  - Intel® Core™ i7-2710QE (6M Cache, up to 3.0 GHz); 45W
  - Intel® Core™ i5-2510E (3M Cache, up to 3.1 GHz); 35W
  - Intel® Core™ i3-2330E (3M Cache, 2.2 GHz); 35W
  - Intel® Celeron® B810 (2M Cache, 1.6 GHz); 35W
- Chipset: Intel® QM77

**MEMORY**

- 2 DDR3/DDR3L 1066/1333/1600MHz SODIMM sockets
- Supports up to 16GB memory
- Dual channel memory interface

**GRAPHICS**

- Intel® HD Graphics 4000
- Supports 2 independent displays
- VGA display resolution up to 2048x1536 @ 60Hz
- DVI display resolution up to 1920x1080 @ 60Hz
- Display outputs: 1 VGA and 1 DVI (DVI-D signal)

**STORAGE**

- 2.5" SATA drive bay(s)
  - 2 SATA 3.0 ports with data transfer rate up to 6Gb/s
  - Standard: 1 single drive bay for 1 SATA drive
  - Option: Single drive bay for second SATA drive (supports RAID 0/1/5/10)
- 1 CompactFlash socket
- Supports 1 mSATA module via the mini PCIe slot

**ETHERNET**

- Intel® WG82579LM with iAMT7.0 Gigabit Ethernet Phy
- Intel® 82574 Gigabit Ethernet controller (-CR4G65/-CR4866)
- Fully IEEE std 802.3af-2003 compliant (-CR4866)
  - Power output: 48V DC 15.4 watts of power per PoE port (Type 1 Mode A 15.4W per port)
- Supports wireless 802.11 b/g/n via the mini PCIe slot

**AUDIO**

- Realtek® ALC262 High Definition Audio
- 2 watt, 4Ω power amplifier

**EXPANSION**

- 1 Mini PCIe slot supports Wi-Fi module or mSATA
- 1 XCT0-3G riser card supports 3G\*
- 1 Mini PCIe slot (USB signal)
- 1 SIM slot

**POWER**

- Power input voltage: 9~30V DC

**ENVIRONMENT**

- Temperature
  - Operating: 0°C ~ 60°C (-CR6881/-CR6G60/-CRA060/-CR4G65)
  - Operating: 0°C ~ 55°C (-CR4866)
  - Storage: -20°C ~ 65°C
- Operating Vibration
  - IEC68-2-64 (HDD)
- Operating Shock
  - Half sine wave 15G, 11ms, 3 shock per axis

**CONSTRUCTION**

- Aluminum + SGCC

**MOUNTING**

- Wall mount

**DIMENSIONS**

- 340.5mm x 88mm x 223mm (W x H x D)

**WEIGHT**

- 9 kg

**OS SUPPORT**

- Windows XP, WES 2009, POSReady 2009, Windows 7, WES 7, Windows 8.1, WES 8
- Linux (Distribution available upon request)

**OTHER FEATURES**

- Watchdog Timer function

**CERTIFICATION**

- CE
- FCC Class A
- RoHS
- UL (EC300-CR6881)

**System Models**


Rear I/O Ports	EC300-CR6881	EC300-CR6G60	EC300-CRA060	EC300-CR4G65	EC300-CR4866
DC-in power jack: 3-pole terminal block	1	1	1	1	1
Speaker-out: 2W 3.5mm audio jack	1	1	1	1	1
VGA: DB-15 D-sub	1	1	1	1	1
DVI (DVI-D signal)	1	0	0	0	0
Gigabit LAN: RJ45 with LEDs	2	2	2	5	2
PoE Gigabit LAN: RJ45	0	0	0	0	4
COM: DB-9 D-sub (RS232/422/485)	6	6	4	4	4 (2 ports are RS232)
COM: 5-pole terminal block (RS232/422/485)	0	0	6	0	0
USB 3.0 Type A	2	2	2	2	2
USB 2.0 Type A	2	0	0	0	0
GPIO: 9-pole terminal block	8-bit	16-bit	0	16-bit	8-bit
Reset button	1	1	1	1	1
Power LED	1	1	1	1	1
HDD LED	1	1	1	1	1
Alert LED	1	1	1	1	1
Front I/O Ports	EC300-CR6881	EC300-CR6G60	EC300-CRA060	EC300-CR4G65	EC300-CR4866
USB 2.0 Type A	4	4	4	4	4
Power button with indicator	1	1	1	1	1
Reset button	1	1	1	1	1
HDD LED	1	1	1	1	1
Alert LED	1	1	1	1	1
Wi-Fi module antenna hole	2	2	2	2	2




3rd/2nd Gen Intel® Core™  
Modular-Designed Embedded System

## EC300 Series

### ► Dimensions

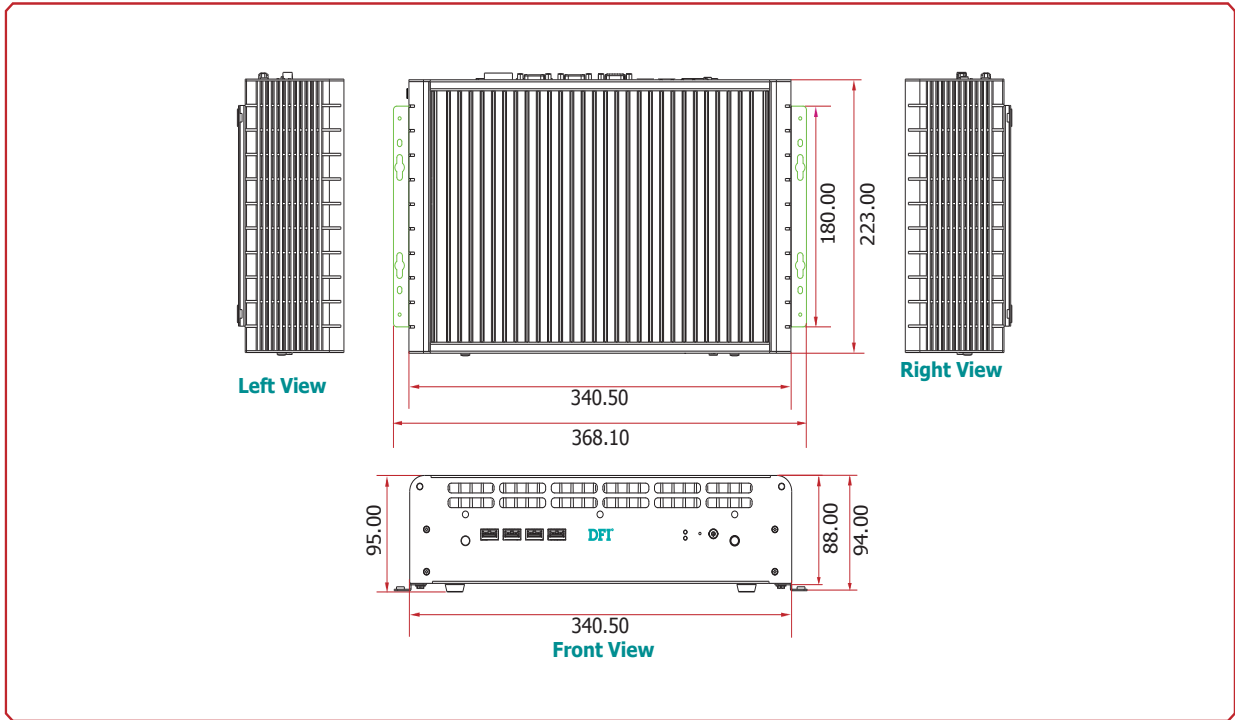

### ► Wall Mounting

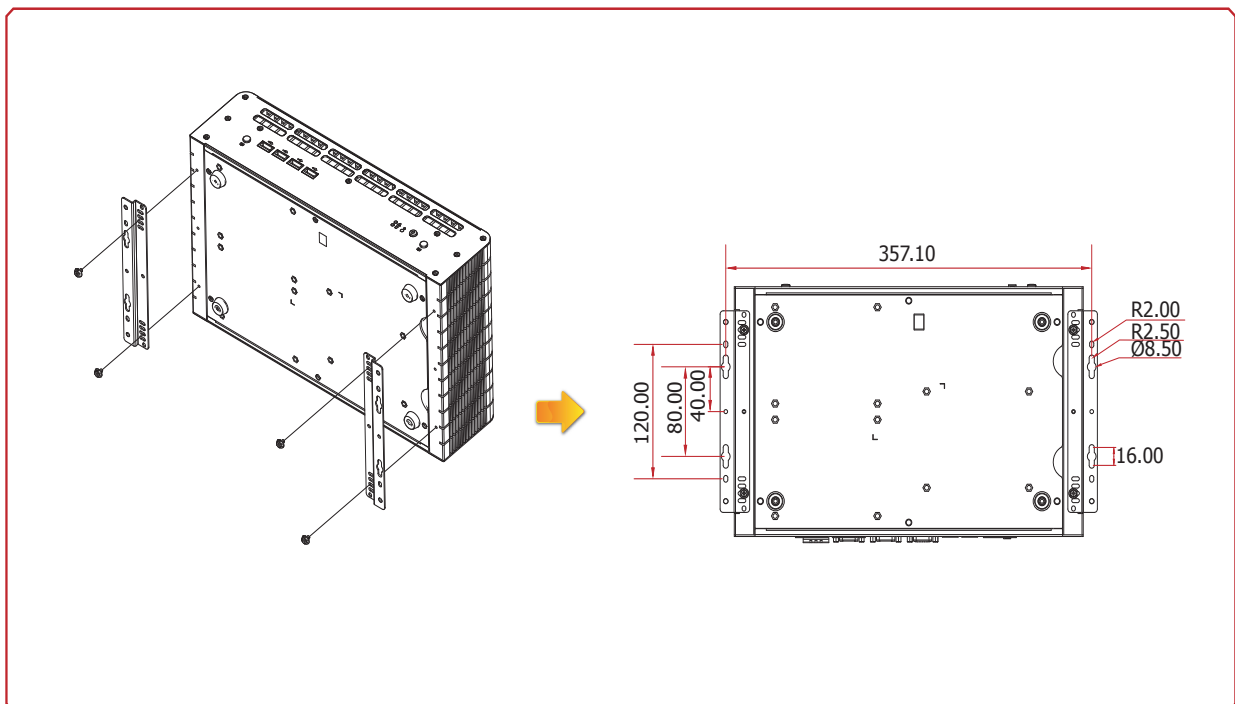



## EC300 Series

### ► Ordering Information

Model Name	Part Number	Description
<b>EC300-CR6G60</b>	750-EC3000-100G	Fanless, i7/i5/i3, QM77, 1 VGA, 2 LAN, 6 COM, 16-bit GPIO, 6 USB, RoHS
<b>EC300-CRA060</b>	750-EC3000-200G	Fanless, i7/i5/i3, QM77, 1 VGA, 2 LAN, 10 COM, 6 USB, RoHS
<b>EC300-CR6881</b>	750-EC3000-300G	Fanless, i7/i5/i3, QM77, 1 DVI, 1 VGA, 2 LAN, 6 COM, 8-bit GPIO, 8 USB, RoHS
<b>EC300-CR4G65</b>	750-EC3000-A00G	Fanless, i7/i5/i3, QM77, 1 VGA, 5 LAN, 4 COM, 16-bit GPIO, 6 USB, RoHS
<b>EC300-CR4866</b>	750-EC3000-400G	Fanless, i7/i5/i3, QM77, 1 VGA, 4 PoE Gigabit LAN, 2 LAN, 4 COM, 8-bit GPIO, 6 USB, RoHS



**Important:**

Due to EC300's unique construction, the system will be delivered with a built-in processor. Make sure to inform your sales representative the processor of your choice.

### ► Optional Items

Optional Items	Part Number	Description
<b>CPU</b>	785-CP988BML	CPU, Socket 988B, Long-term support, RoHS
<b>Memory</b>	785-RSOD38G-L	SODIMM, DDR3L Module (supports dual voltage 1.5V DDR3/1.35V DDR3L), 8GB, RoHS
	785-RSOD34G-L	SODIMM, DDR3L Module (supports dual voltage 1.5V DDR3/1.35V DDR3L), 4GB, RoHS
	785-RSOD32G-L	SODIMM, DDR3L Module (supports dual voltage 1.5V DDR3/1.35V DDR3L), 2GB, RoHS
	785-RSOD31G	SODIMM, DDR3 Module, 1GB, RoHS
<b>HDD</b>	785-H25500G	2.5" SATA HDD, 500GB, RoHS
	785-H25320G	2.5" SATA HDD, 320GB, RoHS
	785-S251TBG	2.5" SATA SSD, 1TB MLC, RoHS
	785-S25512G	2.5" SATA SSD, 512GB MLC, RoHS
	785-S25256G	2.5" SATA SSD, 256GB MLC, RoHS
	785-S25128G	2.5" SATA SSD, 128GB MLC, RoHS
	785-S25064G	2.5" SATA SSD, 64GB MLC, RoHS
<b>HDD Bracket</b>	761-EC3000-200G	2nd HDD Bracket kit, RoHS
<b>mSATA</b>	785-MS128GMF	mSATA Card, 128GB MLC, RoHS
	785-MS64GMF	mSATA Card, 64GB MLC, RoHS
	785-MS32GMF	mSATA Card, 32GB MLC, RoHS
	785-MS16GMF	mSATA Card, 16GB MLC, RoHS
	785-MS08GMF	mSATA Card, 8GB MLC, RoHS
	785-MS04GMF	mSATA Card, 4GB MLC, RoHS
<b>CF</b>	785-CF08G	CF Card, 8G, Industrial Grade SLC
<b>3G</b>	785-EC3G	For EC3xx Series and EC2xx Series 3G Module
<b>Wi-Fi</b>	761-110091-000G	Wi-Fi Kit, RoHS
<b>Power Cord</b>	785-PWRD	Power Cord, Standards (USA/EUR/CH), 1.8m, RoHS
<b>Wall Mount</b>	785-EC3WMK	Wall Mount Kit

### ► Packing List

• 1 EC300 system unit
• 1 SATA data/power cable
• 1 120W power adapter (-CR6G60/-CRA060/-CR6881/-CR4G65)
• 1 160W power adapter (-CR4866)
• 1 Quick Installation Guide
• 1 CD disk includes:
- Drivers / Manual

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660