


Sureview Outdoor Display SVOD Series

SVOD320H30

Slim & Light Design

The Sureview SVOD series is composed of single display with a light and slim design and it can be easily customized to suit various external environments with no need for separate casing.

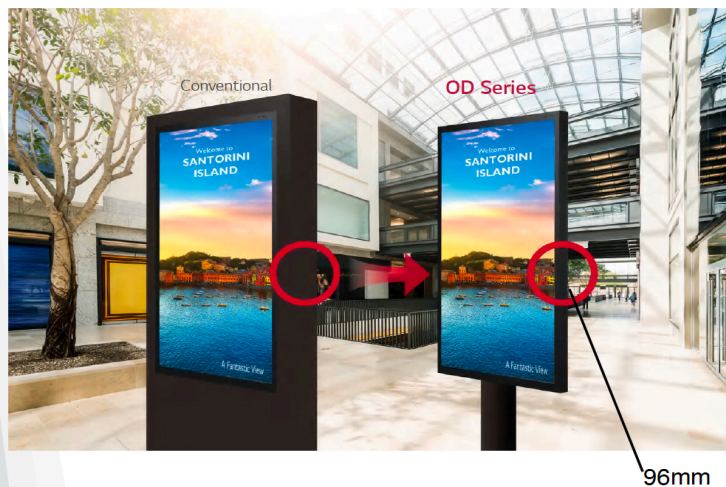

Easy integration for partner's customized design

Because the Sureview SVOD Series is significantly thinner and lighter than previous designs, it is mount-ready and can be more easily customized for a variety of applications.




Outdoor Display SVOD Series

SVOD320H30


Bright & Brilliant

The SVOD series posses a powerful brightness of 3000nits, providing clear and vivid picture quality even under direct sunlight.

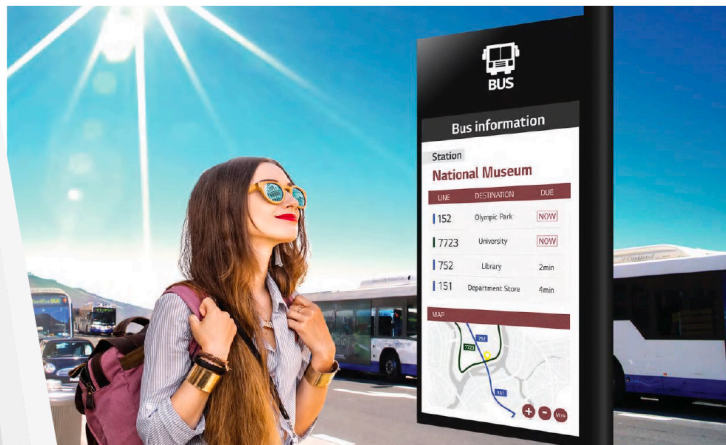

Wide Viewing Angle

IPS technology provides better control of the liquid crystals, which in turn allows the screen to be viewed at virtually any angle.

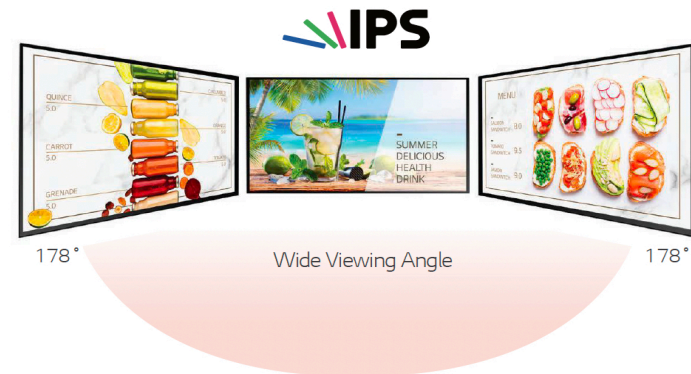


Outdoor Display SVOD Series

SVOD320H30

Energy-Efficient Performance

Through advanced thermal control functionality and a filter-free design, the SVOD Series displays operate at reduced energy consumption. An integrated heat exchanger modifies signage resources depending on the environment, and ultimately cuts costs for operators.

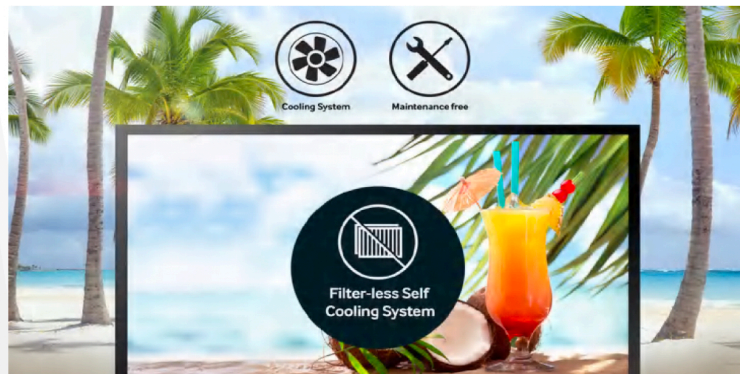

Visible with Polarized Sunglasses

Quarter Wave Plate technology in this display enables clear visibility even when the viewer is wearing polarized sunglasses.



Outdoor Display SVOD Series

SVOD320H30


Operate Reliably in Virtually any Environment

Each SVOD Series display undergoes rigorous IP56 ingress defense testing to ensure resistance to dust, heat, moisture and other environmental variables that can impede operations. This includes an integrated self-cooling system that keeps the SVOD Series displays running in temperatures ranging from -30oC (-22oF) to 50oC (122oF). In turn, operators can feel confident in the displays' ability to perform 24/7, and without requiring expensive external cooling systems or security measures.



Web Monitoring


The embedded web monitoring allows a variety of parameters to be diagnosed in real time using temperature, pixel, door, ambient light and gyro sensors. It can be easily controlled at all times.

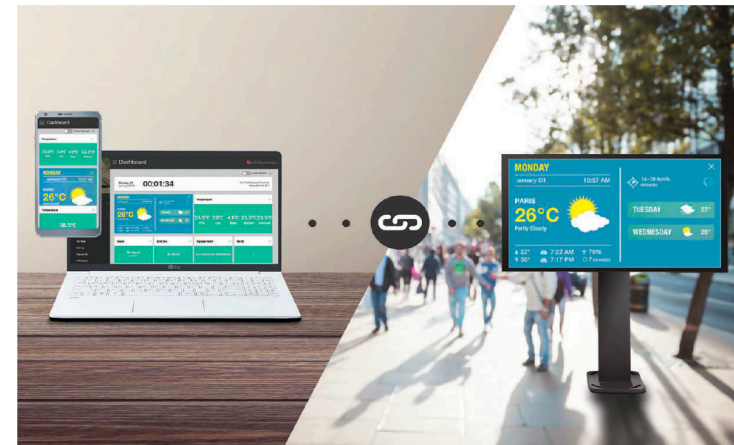

DIMENSIONS

SVOD320H30

SVOD320H30

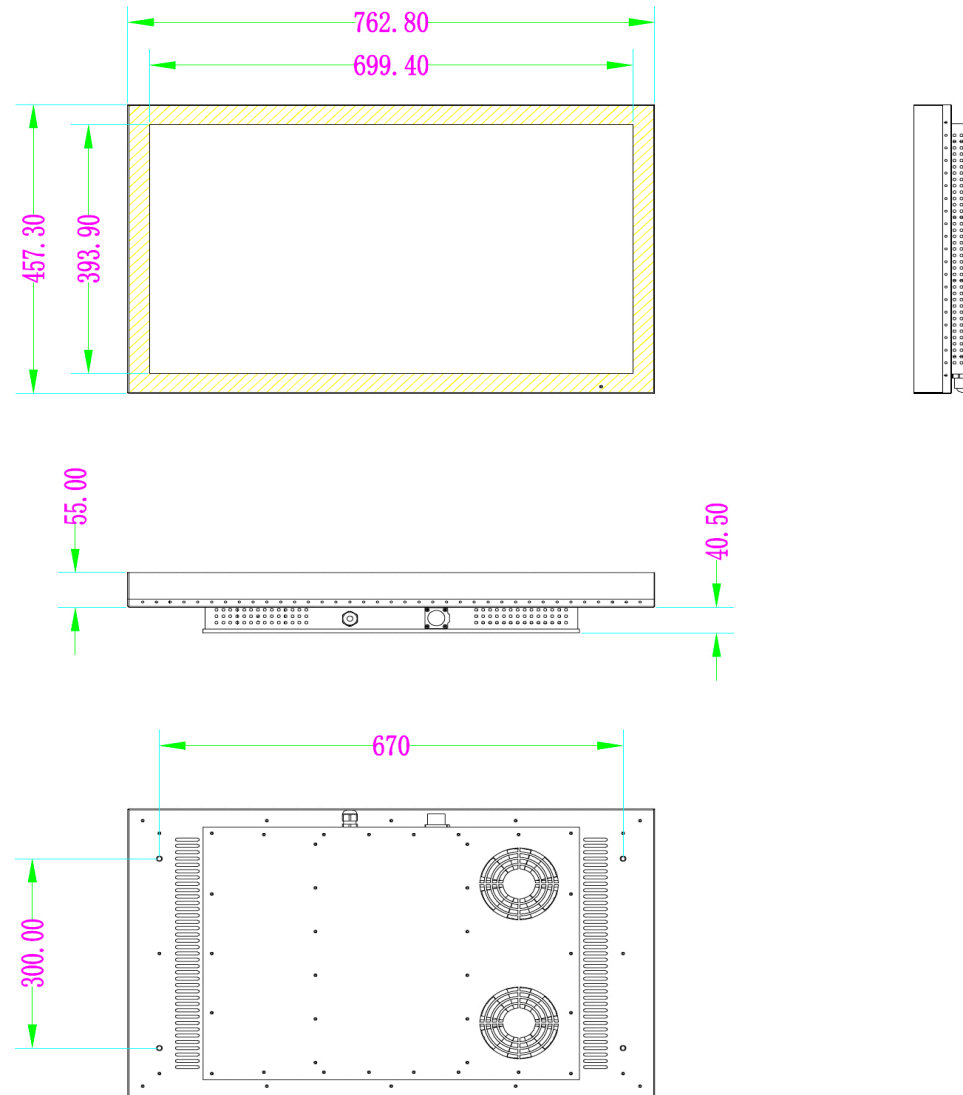

SPECIFICATIONS

SVOD320H30

| MODEL | | SVOD320H30 | |
|--------------------------------|-------------------------|------------------|---|
| Panel | Diagonal Size | Class | 32 |
| | | Measured | 31.55" measured diagonally |
| | Resolution | | 1920x1080 (16:9) |
| | Pixel Pitch(mm) | | 0.36 x 0.36 |
| | Active Display Area(mm) | | 698.4(H) x 392.8(V) |
| | Brightness(Typ.) | | 3,000 cd/m2 |
| | Contrast Ratio | | 1,300:1 |
| | Viewing Angle(H/V) | | 178/178 |
| | Display Colors | | 8 bit - 16.7M |
| | Color Gamut | | 72% |
| | Operation Hour | | 7*24 |
| Touch screen function | | Non Touch Screen | |
| Display | Dynamic C/R | | 100,000:1 |
| Sound | Speaker Type | | N/A |
| Power | Power Supply | | AC 100 - 240 V~ (+/- 10 %), |
| | | | 50/60 Hz |
| | Max[W/h] | | 180W |
| Mechanical Spec | Dimension (mm) | Set | 762.8x457.3x95.5mm |
| | | Package | TBD |
| | Weight (kg) | Set | 30.0 kg |
| | | Package | 45.0 kg |
| | Mounting Hole | | 670x300 (Basic) |
| | | | 700 x 300 (VESA Brack-et Option) |
| | Protection Glass | | 5mm Anti-glared Tempered Glass |
| Bezel Width (mm) | | Even 31.7 mm | |
| Operation | Operating Temperature | | -30°C~ 50°C |
| | Humidity | | 10~100% (Non-condensing) |
| | IP Certificate | | IP56 |
| Connectivity (Embedded H/W) | Input | | HDMI, VGA, DVI, Audio, USB |
| | Output | | / |
| | Model | | BSD E6X.AV HDMI controller |
| | External Control | | Auto-dimming sensor |
| Accessories | Safety | | / |
| | Included Accessories | | Remote Control(w/o battery), AC power plug |
| | Optional Accessories | | Mounting brackets (Wall mount, floor stand) |

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660