



See Beyond,
LG Transparent OLED Signage

55EW5F

* All images used are for illustrative purposes only.

A New Level of See-through View

Imagination becomes reality

LG Transparent OLED signage illuminates spaces that once were hidden away behind the display, completely harmonizing with its surroundings.

Boasting vivid and clear colors with high transparency, this display provides valuable information about as well as visual enhancements to objects placed behind it, giving viewers an impressive “wow” factor.



FULL OF LIFE

Unrivalled Picture Quality




LG's OLED technology, featuring self-lighting pixels, maintains accurate and vivid colors even when the display becomes transparent. It brings content to life, making it difficult for people to separate content from the real objects placed behind the screen. Only when viewed from a side angle is the content readily distinguishable from the actual object. Also noteworthy, LG Transparent OLED signage delivers awe-inspiring picture quality in all parts of the screen, even from wide viewing angles.

SPACIAL HARMONY

High Transparency

Thanks to its high transparency (38%), much higher than conventional LCD transparent displays, LG Transparent OLED signage blends into its surroundings seamlessly and naturally. The display's see-through view turns places where it is installed into open and interactive spaces.

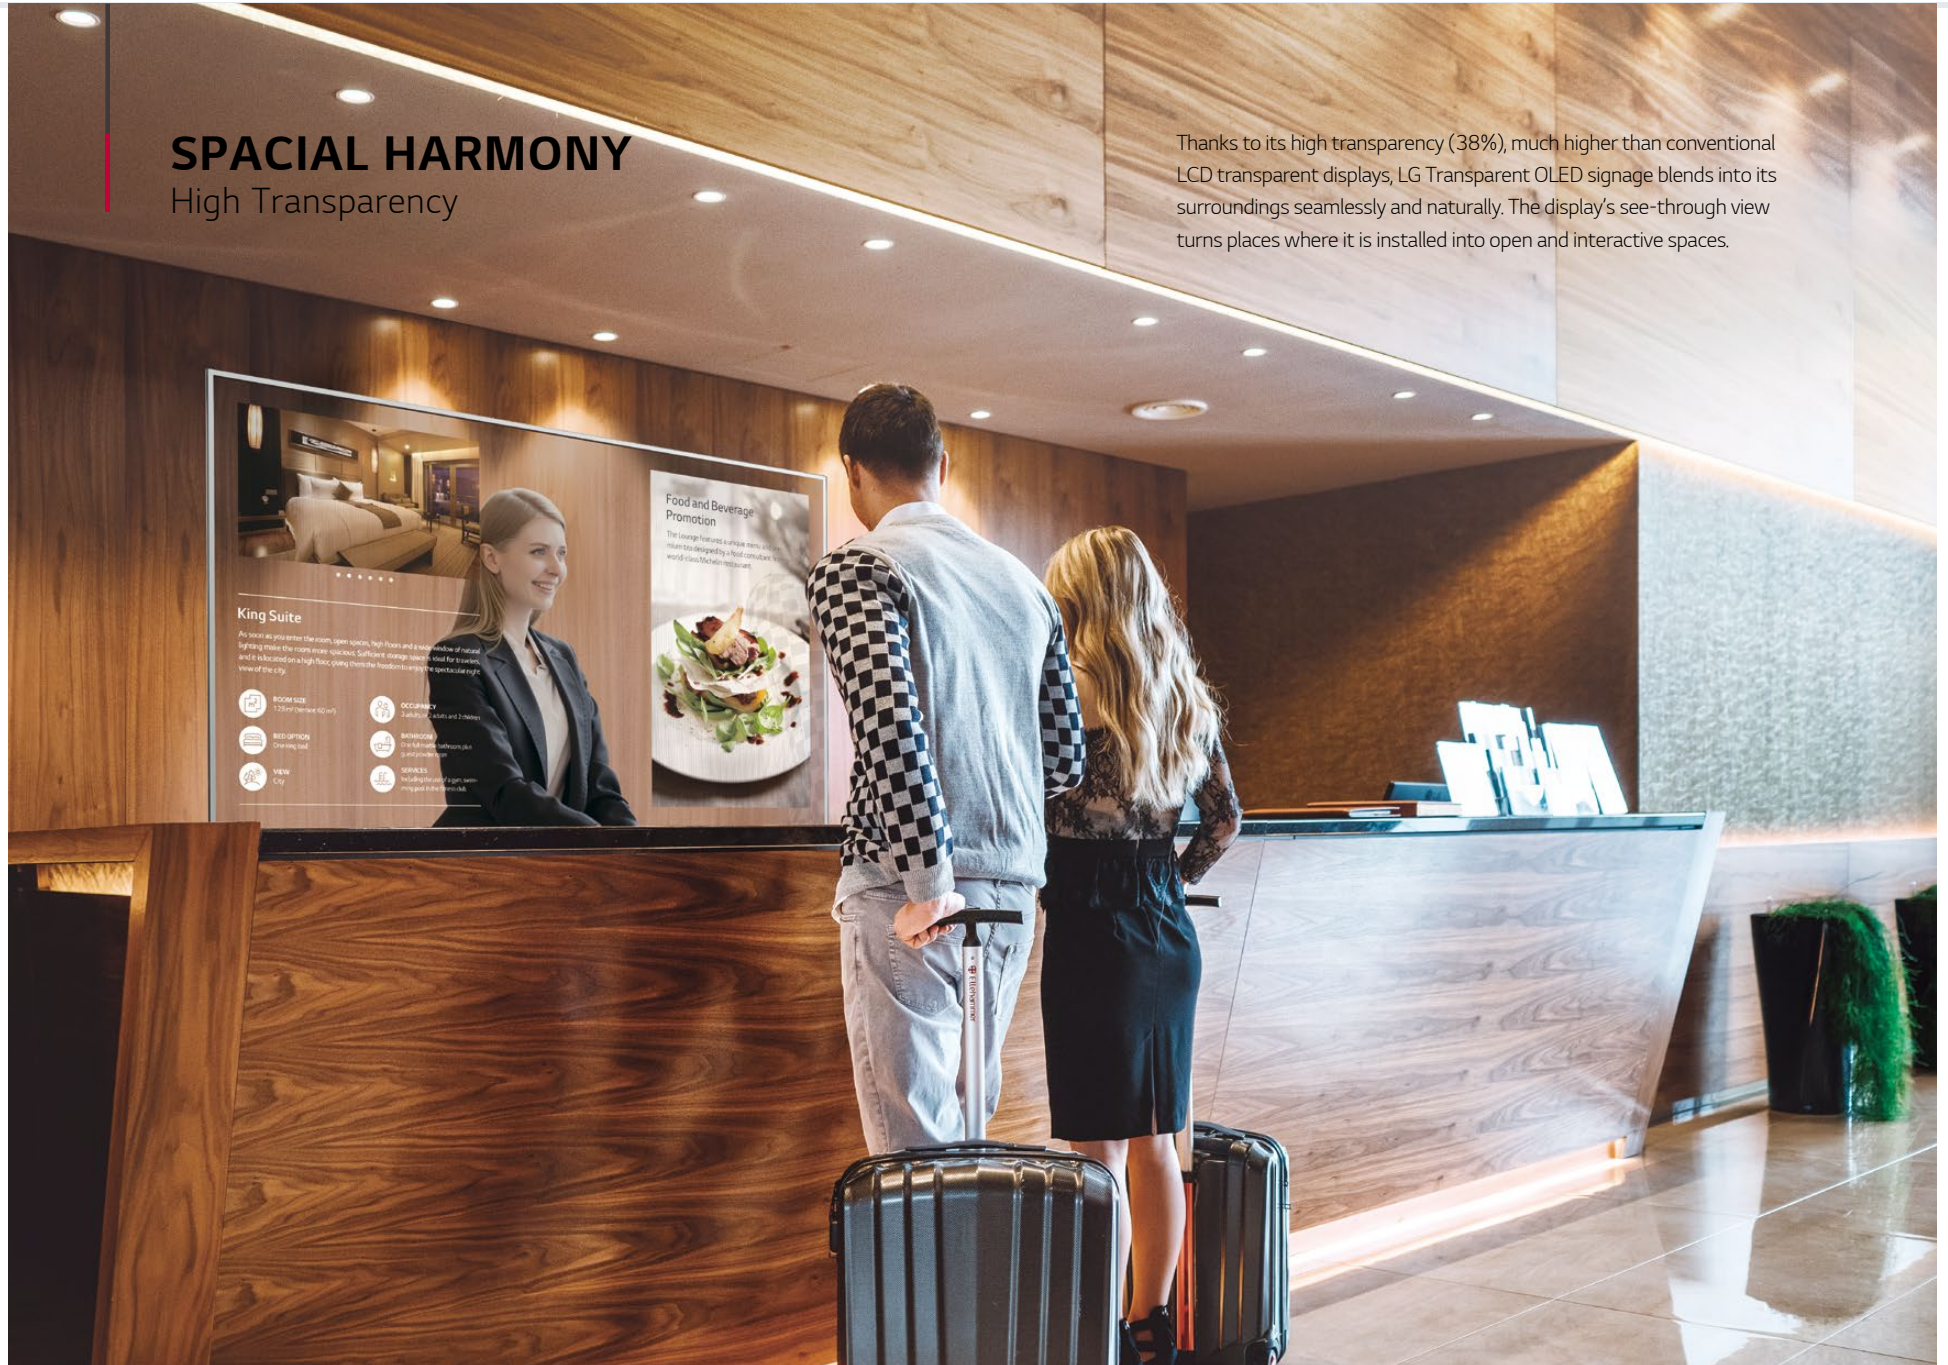

SPACIAL HARMONY


Customizable and Expandable Design



LG Transparent OLED signage is designed as a semi-assembled display, meaning you can install it in various ways to fit into existing structures and spaces. The single stand-alone* type is available, as well as ceiling and wall-mount types*. Displays can be also tiled* together to make a immersive screen, enabling installation on large show-windows. There is no limit to the applications of Transparent OLED signage, and it can complement and enhance any venue in which it is installed.

* Installation accessories are not supplied by LG.

Ceiling/Single

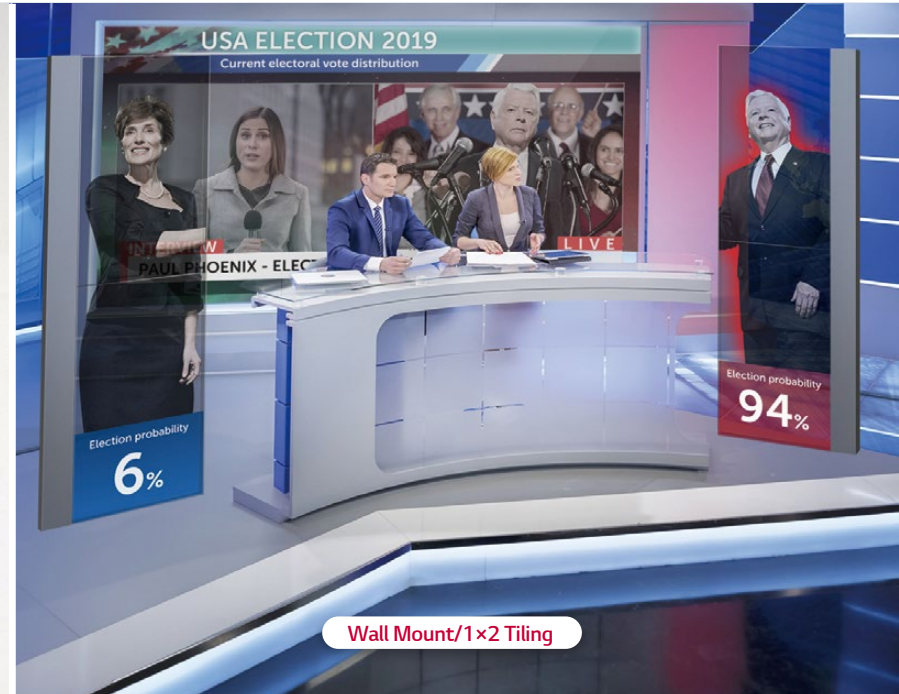

Wall Mount/1x2 Tiling



2x2 Tiling

SEE THROUGH

Effective Information Delivery


When people observe an object, having supplemental information can help provide a richer understanding. In this case, LG Transparent OLED signage is the optimal solution. While clearly showing objects behind the screen, it overlays information right over them so that viewers can easily see both the object and the relevant information without having to change their view.



VISUAL FEAST

AR Effects in the Dark


Using LG Transparent OLED signage, you can surprise viewers with AR effects in the dark. The content displayed seems life-like, adding another “wow” factor to the viewing experience.

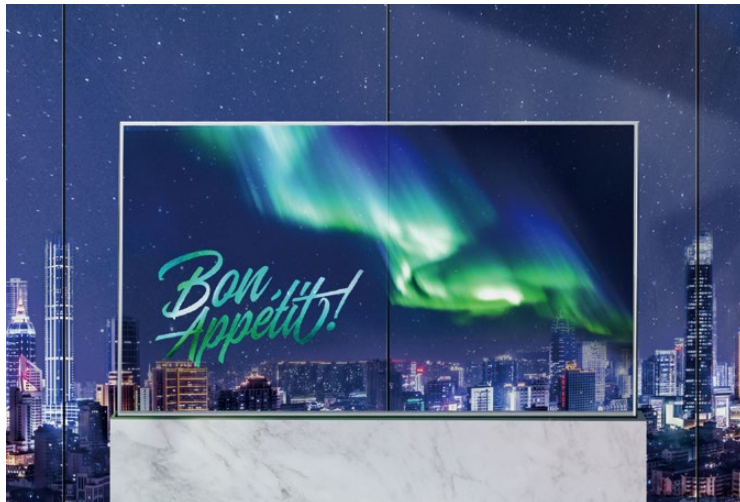

PRODUCT DURABILITY


Robust Design for Safety

The tempered front glass protects the screen from external impact, and its verified safety design means it is reliable enough to endure shock and vibration caused by the surrounding environment, such as moving trains.

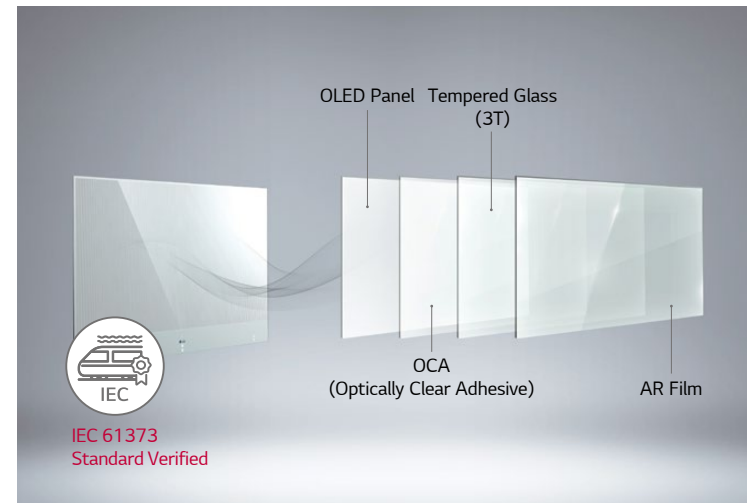


Dimension (unit: mm)


Head

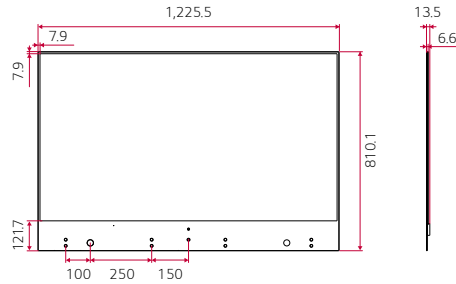

Signage Box



Connectivity



- 1 USB 2.0
- 2 HDMI IN
- 3 DP IN
- 4 DP OUT
- 5 USB 2.0
- 6 LAN IN
- 7 LAN OUT
- 8 IR IN
- 9 RS232C IN
- 10 RS232C OUT
- 11 AUDIO OUT



Specifications

S5EW5F

PANEL	Screen Size	55"
	Panel Technology	OLED
	Native Resolution	1,920 × 1,080 (FHD)
	Brightness (Typ.) ¹⁾	150 / 400 nit (APL 100 % / 25 %, Without Glass)
	Contrast Ratio	150,000 : 1
	Dynamic CR ²⁾	No
	Color Gamut	BT709 120 %
	Viewing Angle(H × V)	178 × 178
	Color Depth	1.07 Billion Colors (10 bit)
	Response Time	1 ms (G to G)
	Surface Treatment (Haze)	No
	Operation Hours (Hours/Day)	18 / 7 (Moving Content Only)
	Portrait / Landscape	Yes / Yes
	Transparency	38 % (SET)
CONNECTIVITY	Input	HDMI (HDCP 2.2), DP (HDCP 1.4), USB 2.0 Type A (2)
	Output	DP, Audio
	External Control	RS232C In / Out, RJ45 (LAN) In / Out, IR In (External IR Receiver)
	Bezel Color	Mirror
	Bezel Width	7.9 / 7.9 / 7.9 / 12.17 mm (T/L/R/B)
	Weight (Head)	13.9 kg (Head), 3.4 kg (Signage Box)
MECHANICAL SPECIFICATION	Monitor Dimensions (W × H × D)	1225.5 × 810.1 × 6.6 mm (Head)
	Monitor Dimensions with Stand (W × H × D)	782.8 × 238.4 × 34.7 mm (Signage Box)
	VESA™ Standard Mount Interface	No
	Protection Glass	Depth 3.0 mm, Tempered / Chemical Strengthening, Anti-Reflective, Shatter-Proof
KEY FEATURE	Internal Memory (64 GB), Temperature Sensor, FAN, webOS 3.0+ Embedded CMS (Local Contents Scheduling, Group Manager), USB Plug & Play, Fail Over, Sync Mode (RS-232C Sync, Local Network Sync), Video Tag (2), Rotation (Screen Rotation, External Input Rotation), Gapless Playback, Tile Mode Setting, Setting Data Cloning, SNMP, ISM Method, Auto Set ID, Status Mailing, Control Manager, Crestron Connected ³⁾ , PM Mode, Wake on LAN, HDMI-CEC ⁴⁾ , SI Server Setting, webRTC	
ENVIRONMENT CONDITIONS	Operation Temperature	0 °C to 40 °C
	Operation Humidity	10 % to 80 %
POWER	Power Supply	AC 100 – 240 V -, 50 / 60 Hz
	Power Type	Built-in Power
	Power Typ. / Max.	309 W / 318 W
	Consumption BTU (British Thermal Unit)	1,054 BTU/Hr (Typ.), 1,085 BTU/Hr (Max.)
SOUND	Speaker	No
	Safety	CB / NRTL
CERTIFICATION	EMC	FCC Class "A" / CE / KC
	ErP	Yes (EU Only)
MEDIA PLAYER COMPATIBILITY	OPS Type Compatible	No
	OPS Power Built In	No
SOFTWARE COMPATIBILITY	SuperSign CMS, SuperSign Control / Control+, SuperSign WB, SuperSign Media Editor, Signage365Care ⁵⁾	
ACCESSORIES	Basic	Remote Controller, Power Cord, QSG, IR Receiver, Regulation Book, Phone to RS232C Gender, FFC Cables (1,600 mm × 4 ea for Connection Between Panel and Signage Box), DP Cable (2 M), LAN Cable (2 M), RS232 Cable (4P-4P, 1.5 M), LC Cable (VLC, 3 M), Tape (10 ea for Cabling / 10 ea EMI Gasket Tape), Screw (M4 × L22, 12 ea / M4 Nut 12 ea / M3 × L5.5, 8 ea / M3 × L3.5, 20 ea), Shield Cover Assy, Rubber Damper 4 ea

¹⁾ The luminosity ratio of Full Black / Full White color on video input condition.

²⁾ Brightness may vary for final product. (With glass).

³⁾ Network Based Control

⁴⁾ Compatibility may differ by equipment.

⁵⁾ The availability can differ by region.

* Specifications are subject to change without notice, so please contact LG sales team to verify before ordering.



Download
LG C-Display+
Mobile App

Google Play Store

- www.lg.com/b2b
- www.youtube.com/c/LGCommercialDisplay
- www.facebook.com/LGInformationDisplay
- www.linkedin.com/company/lginformationdisplay

LG may make changes to specifications and product descriptions without notice.
Copyright © 2020 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp.
The names of products and brands mentioned here may be the trademarks of their respective owners.



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660