



Industrial Solutions Partner!

## SSF3485-INK / SSH3485-INK V1 MaxRGB

**34.8" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840 x 536 ultra-wide aspect ratio 16:2.2**

The SSF/SSH3485-INK is a 34.8 inch color TFT-LCD display with special aspect ratio 16:2.2 and wide resolution 3840 x 536 with HCS (High Color Saturation). It is LiteMAX's Spanpixel series product which designed for high brightness 1000 nits with power efficiency LED backlight. It provides LCD panel with specific aspect ratios and sunlight readable for digital signage, public transportation, exhibition hall, department store, and vending machine.

### Key Features

- Resizing LCD
- Ultra-Wide Screen (16 : 2.2)
- High Brightness 1000 nits
- Sunlight Readable
- LED Backlight
- Slim Bezel
- [High Color Saturation](#)
- BL MTBF: 100,000 hours



### Specifications

| Model Name               | SSF3485-INK / SSH3485-INK V1 <a href="#">MaxRGB</a>           |
|--------------------------|---------------------------------------------------------------|
| Description              | 34.8" Resizing LCD, 1000 nits LED backlight, MaxRGB, 3840x536 |
| Screen Size              | 34.8"                                                         |
| Display Area (mm)        | 878.11(H) x 120.44(V)                                         |
| Brightness               | 1000 cd/m <sup>2</sup>                                        |
| Resolution               | 3840x536                                                      |
| Aspect Ratio             | 16 : 2.2                                                      |
| Contrast Ratio           | 4900 : 1                                                      |
| Pixel Pitch (mm)         | 0.2247(H) x 0.2247(V)                                         |
| Pixel Per Inch (PPI)     | 111                                                           |
| Viewing Angle            | 178°(H), 178°(V)                                              |
| Color Saturation (NTSC)  | 94%                                                           |
| Display Colors           | 1.07G                                                         |
| Response Time (Typical)  | 8.5ms                                                         |
| Panel Interface          | V-by-One                                                      |
| AD Board Input Interface | VGA, DVI-D, HDMI, DP                                          |
| AD Board Input Power     | DC12V (DC24V optional)                                        |
| Power Consumption        | 54W, (59W with AD Board)                                      |
| OSD Key                  | 5 Keys (Power Switch, Menu, +, Exit, -)                       |
| OSD Control              | Brightness, Color, Contrast, Auto Turing, H/V Position...etc  |
| Dimensions (mm)          | 899.4x 149.3 x 18.85                                          |
| Bezel Size(U/B/L/R)      | 12/12/8.6/8.6 mm                                              |
| Weight (Net)             | 2.9 kg                                                        |
| Operating Temperature    | 0 °C ~ 50 °C                                                  |
| Storage Temperature      | -20 °C ~ 60 °C                                                |

[SSF](#) = Panel+ LED Driving Board

[SSH](#) = Panel+ LED Driving Board + AD Control Board

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.




Industrial Solutions Partner!

## Mechanical Drawing



Outline Dimensions

Unit: mm

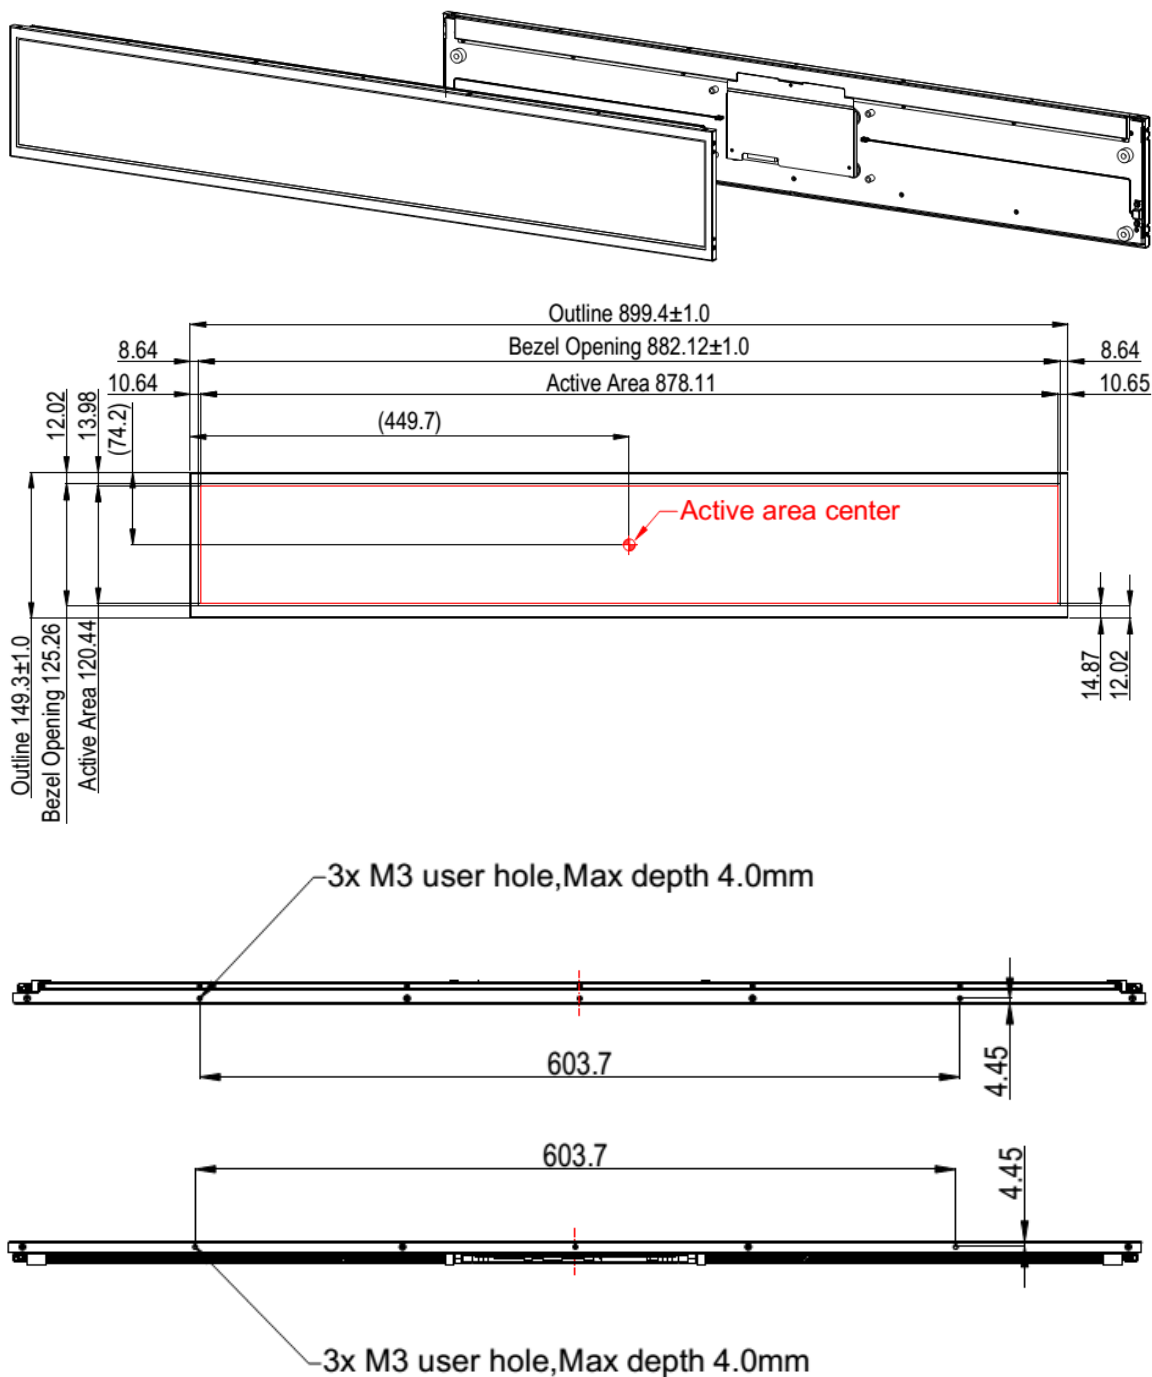





*Industrial Solutions Partner!*

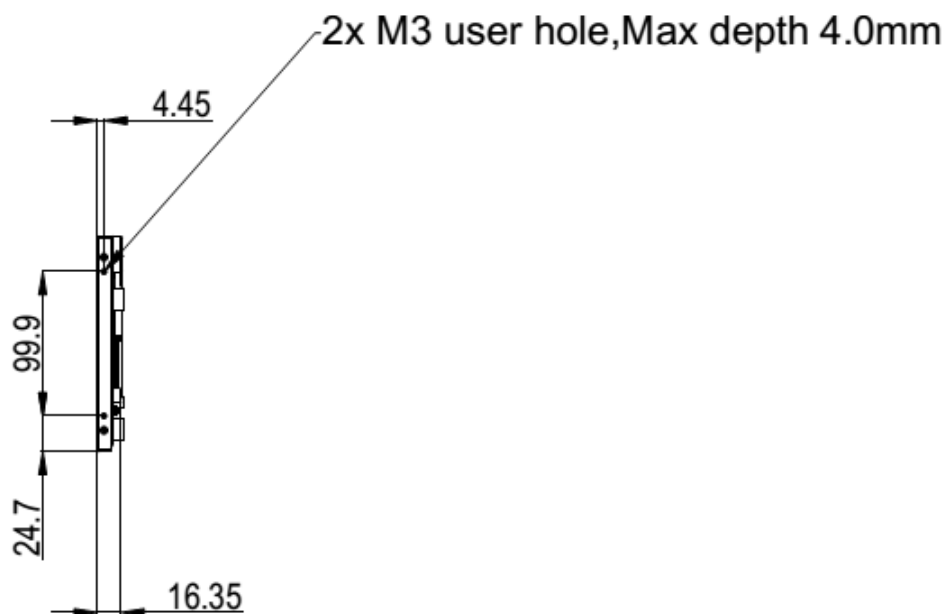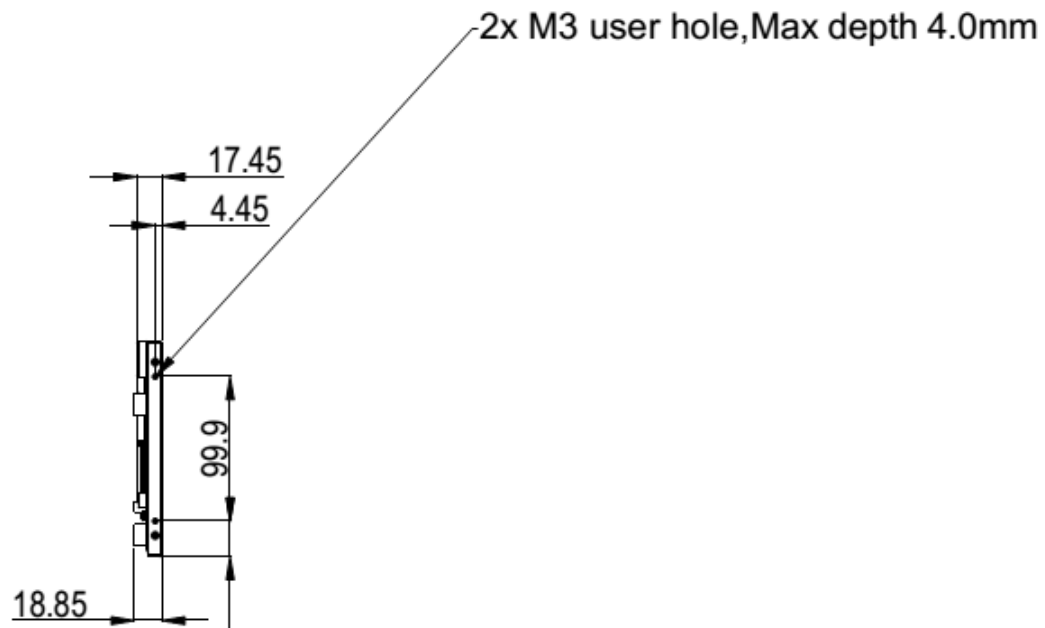



Industrial Solutions Partner!

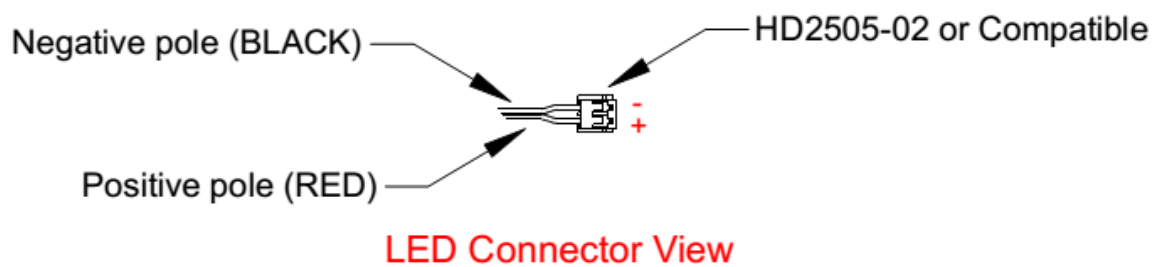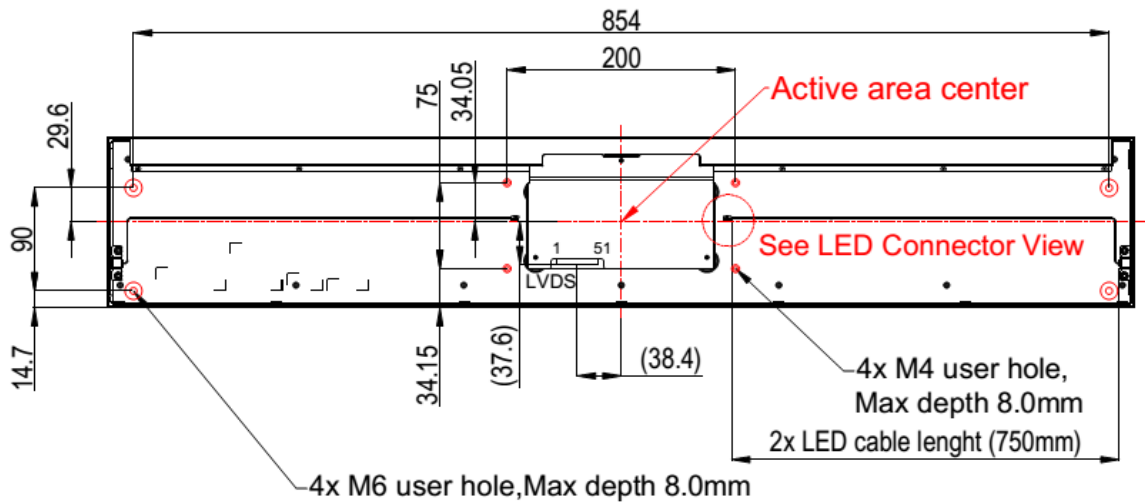

Note:

1. Resolution: 3840x536
2. Tolerance is  $\pm 0.5\text{mm}$  unless noted
3. "( )"marks the reference dimensions
4. LVDS Connector Pin Assignment (187059-51221(P-TWO)or WF23-402-5133(FCN))  
Matting connector : FI-RE51HL (JAE)

## Ordering Information

| Part Number     | Description                                                    |
|-----------------|----------------------------------------------------------------|
| SSF3485-INK-A01 | 34.8",1000nits,3840*536,MaxRGB,LID34A,3in1,V1                  |
| SSH3485-INK-M01 | 34.8",1000nits,3840*536,MaxRGB,LID34A,AD9131GDHP,DC12V,3in1,V1 |
|                 |                                                                |

## Optional Accessories

| Part Number  | Description                                                                         |
|--------------|-------------------------------------------------------------------------------------|
| 840612051211 | ADAPTER,AC/DC,12V/5.4A,64.8W,Power-Din-4P,Atech.A0605TD-120054.Efficiency-level-6,R |
| 810618301010 | CABLE.POWER.AC.1830mm USA type                                                      |
| 810618301090 | CABLE.POWER.AC.1830mm Europe type                                                   |
| 810618301050 | CABLE.POWER.AC.1830mm UK type                                                       |
| 810618301170 | CABLE.POWER.AC.1830mm Australia type                                                |
| 810618301031 | CABLE.POWER.AC.1830mm Japan type                                                    |
|              |                                                                                     |

## By Customer Request

|       |                                 |
|-------|---------------------------------|
| Glass | Tempered glass, AR coating..... |
|-------|---------------------------------|

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660