

# R15L600-67C3ST

## 15" IP67 Stainless Resistive Chassis Display



### KEY FEATURES

- 15", 1024 x 768
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP67 waterproof and dustproof



### SPECIFICATIONS

| Display             |                                                                                                                     |                       |                                                                                                                                |
|---------------------|---------------------------------------------------------------------------------------------------------------------|-----------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Resolution          | 1024x768                                                                                                            | Size                  | 15 inches                                                                                                                      |
| Contrast Ratio      | 2000:1                                                                                                              | Panel Brightness      | 300 nits                                                                                                                       |
| Display Color       | 16.2M Colors                                                                                                        | View Angles           | 88,88,88,88                                                                                                                    |
| Active Area         | 304.1x228.1 mm                                                                                                      | Touch / Glass         | Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)                                   |
| Mechanical          |                                                                                                                     |                       |                                                                                                                                |
| Dimension           | 383 x 310 x 57 mm                                                                                                   | Mounting              | VESA Mount<br>Yoke Mount                                                                                                       |
| Enclosure           | Stainless Housing                                                                                                   | Cooling System        | Fanless design                                                                                                                 |
| Environment         |                                                                                                                     |                       |                                                                                                                                |
| Operating Humidity  | 10% to 90% RH, Non-Condensing                                                                                       | Operating Temperature | 0°C to 45°C                                                                                                                    |
| Storage Temperature | -20°C to 60°C                                                                                                       | IP rating             | IP67                                                                                                                           |
| Certification       |                                                                                                                     |                       |                                                                                                                                |
| Certification       | CE, FCC                                                                                                             |                       |                                                                                                                                |
| IO Ports            |                                                                                                                     |                       |                                                                                                                                |
| Power Input         | 1 x M12 waterproof connector for 12V DC                                                                             | USB Port              | 1x M12 waterproof connector for touch screen control (Optional)                                                                |
| Serial Port         | 1 x M12 waterproof connector for touch screen control (Optional)                                                    | Video                 | 1x M12 type connector for VGA input<br>1x waterproof DVI input (Optional)<br>1x waterproof connector for HDMI input (Optional) |
| Indicator           | 1 x LED Indicator for power<br>1 x LED Indicator for status                                                         |                       |                                                                                                                                |
| Control             |                                                                                                                     |                       |                                                                                                                                |
| Button              | 1 x Power Button<br>1 x Adjust up button<br>1 x Adjust down button<br>1 x ESC (Auto) button<br>1 x OK (Menu) button |                       |                                                                                                                                |
| Accessory           |                                                                                                                     |                       |                                                                                                                                |
| Accessory           | 100~240V AC to DC Adapter with waterproof connector                                                                 | Optional Accessory    | Yoke mount stand (Optional)<br>External HDMI cable with waterproof connector                                                   |


Power Cord  
External VGA cable with waterproof connector  
External USB or RS232 cable with waterproof connector for touchscreen control  
Waterproof caps  
Manual  
VESA screws

(Optional)  
External DVI cable with waterproof connector  
(Optional)

#### Power

**Power Rating** 12V DC (M12 type)

#### DIMENSIONS UNIT:MM

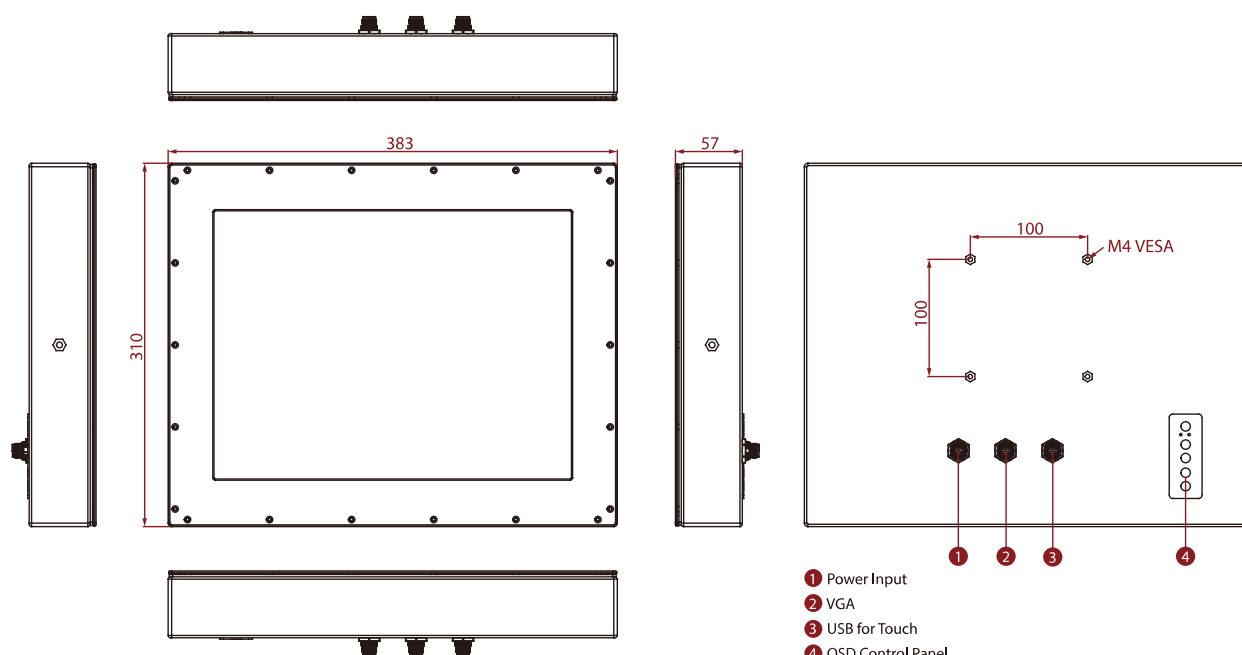

#### NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660