



ARES-1973C-48C8

Dual 10G SFP+ Fiber LAN with 6th / 7th Gen. Intel® Core™ i7/i5/i3 Processor



Features

- Socket LGA1151 for Intel®Core™ i7/i5/i3 Processor
- 1 x GbE + 2 x SFP+ LANs Connectivity
- 2 x SFP+ 10G LANs for 10G Cameras
- Fanless Design
- 4 x USB 3.0/2.0 combo + 4 x USB 2.0 ports
- Supports dual-display for 1 x VGA and 1 x DisplayPort
- Internal USB 2.0 Type-A Connector for USB Dongle
- Supports RAID 0 / 1

Industrial Automation

System	
CPU	Socket LGA1151 for 6 th / 7 th Intel® Core i7 / i5 / i3 Max.35W TDP
Memory	2 x 260-pin DDR4 SO-DIMM sockets, supporting 2133MHz SDRAM up to 32GB
Chipset	Intel® C236
Graphics	Intel® Gen9 Graphics DX 11/12, OGL4.3/4.4 1 x Intel® i219LM PCIe controller w/ iAMT 11.0 (except Core i3)
LAN Chipset	1 x Intel® X710-BM2 PCIe controller
Watchdog Timer	1~255 levels reset
I/O	
Serial Port	2 x RS232/422/485 DB-9 ports 2 x RS232 ports DB-9 ports 4 x USB 3.0/2.0 Type A connectors
USB Port	4 x USB 2.0 Type A connectors 1 x Vertical USB 2.0 (type A) internal
LAN	1 x RJ-45 port for Giga LAN 2 x SFP+ port for 10 GbE LAN
Video Port	1 x DisplayPort 1.2, up to 4K (UHD) 1 x VGA
Storage	1 x SATA 3.0 Port and 1 x SATA Power connector 1 x M.2 M-key for SSD, 2242/2280 (PCIe x4+SATA3.0)
Digital I/O	8 bit DIO (Optional 32 bit DIO)
Expansion Bus	1 x M.2 M-key for SSD, 2242/2280 (PCIe x4+SATA3.0)
Environmental	
Operating Temp.	-20 ~ 50 °C (-4 ~ 122°F), ambient w/ air flow

Storage Temp.	-30 ~ 80°C (-22 ~ 176°F)
Operating Humidity	10-95% @ 50°C (non-condensing)
Vibration	5~500Hz 3 Grms X,Y,Z axis w/SSD, according to IEC 68-2-64
Shock & Crash	10G peak acceleration (11 m sec. duration), operation 30G peak acceleration (11 m sec. duration), nonoperation According to IEC 68-2-27

Qualification	
Certification	CE, FCC Class A

Power Requirement	
Power Input	DC 12~24V
Power Consumption	Max. 80W (w/o I/O card)


Storage	
Type	1 x 2.5" internal drive bay for HDD/SDD 1 x M.2 M-key for SSD, 2242/2280

Mechanical	
Construction	Metal + Aluminum Alloy
Mounting	Wall-mount / DIN-rail
Weight	4.2Kg
Dimensions (W x D x H)	254 x 170 x 94 mm (10" x 6.7" x 3.7")





OS Support	
Windows 10 IoT	

Ordering Information	
ARES-1973C-48C8	ARES-1973 w/ C236, 4 x COM, 4 x DI/DO, 1 x GbE LAN, 2 x 10GbE LAN, and 8 x USB

All specifications are subject to change without notice.



Dimensions

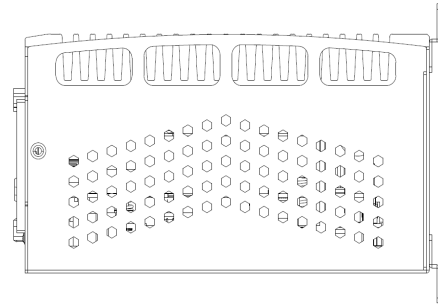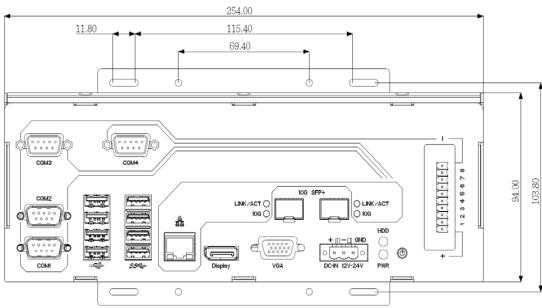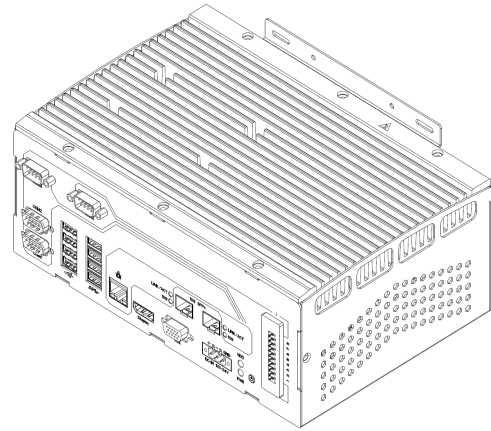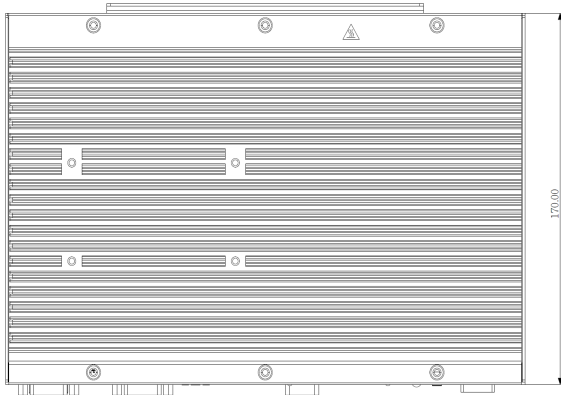

Standard Accessories

WMK-1973 Wall-mount kit for ARES-1973



Optional Accessories

64/128/256GB SSD 2.5" SSD MLC 64/128/256GB Kit



MM-4C-4G/8G/16G DDR4-2133 4GB/8GB/16GB SDRAM Kit



Core™ i7-7700T Intel® 7th Gen. Core™ i7-7700T processor, L2/8M, 2.9G

Core™ i5-7500T Intel® 7th Gen. Core™ i5-7500T processor, L2/6M, 2.7G



Core™ i3-7101TE Intel® 7th Gen. Core™ i3-7101TE processor, L2/3M, 3.4G

PAC-120W6B-FSP-ES 19V/6.32A 120W AC/DC adapter kit



DRK-002 Al6063
DIN Rail 84 x 60 x 9mm



SFP+-10G-F 10GBASE-SR/SW,MM,850nm,VCSEL,SFP+ FIBER TRANSCEIVER



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660