

# LMX-0802 Series

**8-Port Industrial Managed Ethernet Switches, w/6\*10/100Tx, 2\*100Fx, 12~48VDC Power Input**



## Features


- ▶ Supports 6\*10/100Tx and 2\*100Fx (SC/ST Connectors in Multi or Single Mode Fiber)
- ▶ Network Redundancy: STP/RSTP/MSTP, and G.8032 ERPS (Recovery Time <50ms)
- ▶ Supports IPv4/IPv6, and DHCP Option 66/67/82
- ▶ Supports Modbus/TCP Protocol for Device Management and Monitoring
- ▶ Configuration: Web Console, Telnet, CLI Command
- ▶ IGMP v1/v2 for Multicast Traffic Filtering
- ▶ System Warning Setting for Automatic Warning through E-mail
- ▶ QoS (IEEE802.1p/1Q), CoS/ToS to Increase Determinism
- ▶ IEEE802.1Q VLAN for Easy Network Planning
- ▶ Enhanced Network Security with IEEE802.1X, SNMP v1/v2c/v3, HTTPS, and SSH/SSL
- ▶ Auto Warning by Exception through E-mail, Relay Output
- ▶ Operating Temp –STD: -10~70°C, EOT: -40~75°C
- ▶ 5-Year Warranty

## INTRODUCTION

**Antaira Technologies' LMX-0802 series** is an 8-port industrial managed Ethernet switch that is embedded with 6\*10/100Tx Ethernet ports and 2\*100Fx fiber ports that support SC or ST connections in either Single or Multi-Mode fiber. The LMX-0802 series is a fully manageable Layer 2 Ethernet switch that is pre-loaded with a user-friendly web management console design. It supports the ring network redundancy function using the market's open standard ITU-T G.8032 ERPS (Ethernet Ring Protection Switch) protocol that has a <50ms network recovery time. The advanced network filtering and security functions, such as, IGMP, VLAN, QoS, SNMP, port lock, RMON, Modbus TCP, and 802.1X/HTTPS/SSH/SSL increase determinism and improve network management for remote SCADA systems or control networks.

The LMX-0802 series is IP30 rated and DIN-rail mountable. There are also two wide operating temperature models for either a standard temperature range (STD: -10°C to 70°C) or an extended temperature range (EOT: -40°C to 75°C). It also provides high EFT and ESD protection for industrial networking applications, such as, power/utility, water wastewater, oil/gas/mining, factory automation, security surveillance within transportation, ITS and any other outdoor or harsh environment.

## DIMENSIONS

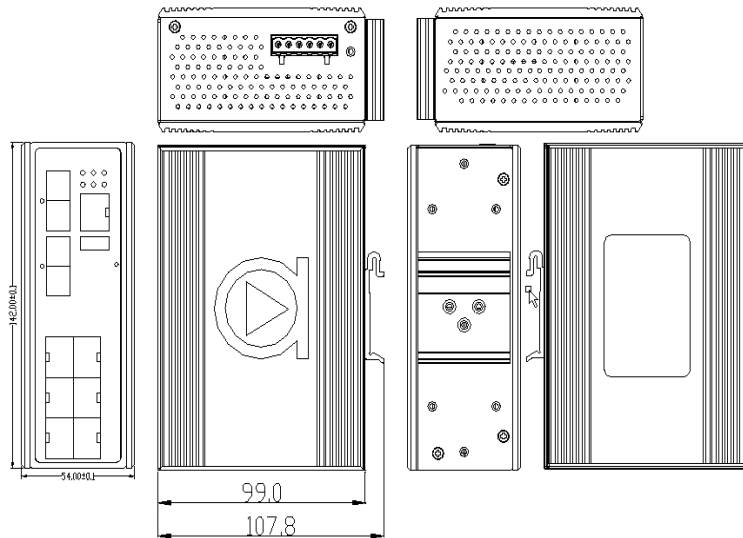

## SPECIFICATIONS

<b>Technology</b>	IEEE 802.3 10Tx Ethernet IEEE 802.3u 100Tx Fast Ethernet IEEE 802.3x Flow Control for Full Duplex IEEE 802.3ad for Port Trunk with LACP IEEE 802.1d STP (Spanning Tree Protocol) IEEE 802.1w RSTP (Rapid Spanning Tree Protocol) IEEE 802.1s MSTP (Multiple Spanning Tree Protocol) ITU-T G.8032/Y.1344 ERPS (Ethernet Ring Protection Switch) Protocol IEEE 802.1Q for VLAN Tagging IEEE 802.1x for Network Authentication IEEE 802.1p QoS/CoS Protocol for Traffic Prioritization
<b>Standards</b>	
<b>Protocol</b>	IGMPv1/v2, SNMPv1/v2c/v3, TFTP, SNMP, SMTP, RMON, HTTP, HTTPS, Telnet, Syslog, DHCP Option 66/67/82, SSH/SSL, Modbus/TCP, LLDP, IPv4/IPv6, NAT, DHCP per port, SMTP, Quick ERPS, TLS
<b>Switch Properties</b>	
<b>Configuration</b>	Web Console, Telnet, CLI
<b>Processing Type</b>	Store and Forward
<b>Flow Control</b>	IEEE 802.3x for full duplex mode, back pressure for half duplex mode
<b>Transfer Rate</b>	14,880pps for 10Base-T Ethernet 148,800pps for 100Base-T Fast Ethernet
<b>Packet Buffer</b>	4 Mbits
<b>Jumbo Frame</b>	-
<b>MAC Table Size</b>	8K
<b>VLAN Group</b>	1 ~ 4094
<b>IGMP Group</b>	Up to 256 Groups
<b>Port Interface</b>	
<b>Ethernet RJ45 Port</b>	6*10/100BaseTx auto negotiation speed, Full/Half duplex mode, and auto MDI connection
<b>Fiber Ports</b>	2*100F <sub>x</sub> SC or ST in Single or Multi-Mode
<b>Wavelength</b>	Dependent on Fiber type and Distance
<b>RS232 Serial Console</b>	1*RS232 in RJ45 connector with console cable, 115.2Kbps, 8,N,1
<b>Configuration Backup</b>	1*USB 2.0

<b>Protection</b>	
<b>Overload Current</b>	Present
<b>Power Reverse Polarity</b>	Present
<b>CPU Watchdog</b>	Present
<b>Network Cable</b>	
	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable; 100Base-TX: 2-pair UTP/STP Cat. 5 cable. EIA/TIA-568 100-ohm (100m) 1000BaseTX: UTP/STP Cat.5/5E cable; EIA/TIA-568 100-ohm (100m)
<b>Mechanical Characteristics</b>	
<b>LED Indicator</b>	Per Unit: Power 1 & 2 (Green), Fault (Green/Red)
<b>Housing</b>	Metal IP30 rated
<b>Dimension</b>	54 x 142 x 99 mm
<b>Weight</b>	Unit: 2.4 lbs.; Shipping: 2.9 lbs.
<b>Mounting</b>	DIN-Rail; Wall-Mount (optional)
<b>Power Requirement</b>	
<b>Input Voltage</b>	12~48VDC Redundant Input
<b>Power Connection</b>	1 removable 6-contact terminal block
<b>Power Consumption</b>	15 Watts
<b>Environmental Limits</b>	
<b>Operating Temperature</b>	STD: -10 to 70°C EOT: -40 to 75°C
<b>Storage Temperature</b>	-40°C ~ 85°C
<b>Ambient Relative Humidity</b>	5 to 95%, (non-condensing)
<b>Regulatory Approvals</b>	
<b>EMI</b>	FCC Class A
<b>EMS</b>	IEC61000-4-2,3,4,5,6,8 IEC61000-6-2,4
<b>Free Fall</b>	IEC60068-2-32
<b>Shock</b>	IEC60068-2-27
<b>Vibration</b>	IEC60068-2-6
<b>Green</b>	RoHS Compliant
<b>Certifications</b>	FCC, CE, UL 61010-1, UL 61010-2-201
<b>Warranty</b>	5 Years

## ORDERING INFO

<b>LMX-0802-M</b>	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100F <sub>x</sub> MM SC Fiber Ports
<b>LMX-0802-M-T</b>	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100F <sub>x</sub> MM SC Fiber Ports ; EOT: -40° to 75° C
<b>LMX-0802-ST-M</b>	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100F <sub>x</sub> MM ST Fiber Ports
<b>LMX-0802-ST-M-T</b>	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100F <sub>x</sub> MM ST Fiber Ports ; EOT: -40° to 75° C
<b>LMX-0802-S3</b>	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100F <sub>x</sub> SM SC Fiber Ports
<b>LMX-0802-S3-T</b>	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100F <sub>x</sub> SM SC Fiber Ports ; EOT: -40° to 75° C
<b>LMX-0802-ST-S3</b>	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100F <sub>x</sub> SM ST Fiber Ports
<b>LMX-0802-ST-S3-T</b>	8-Port Industrial PoE+ Managed Ethernet Switch with 6*10/100Tx + 2*100F <sub>x</sub> SM ST Fiber Ports ; EOT: -40° to 75° C
<b>Optional Accessories</b>	
<b>DR-75-48</b>	75W Industrial Din Rail Power Supply (48VDC)
<b>DR-120-48</b>	120W Industrial Din Rail Power Supply (48VDC)
<b>SDR-240-48</b>	240W Industrial Din Rail Power Supply (48VDC)
<b>SFP-M-T</b>	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550M / LC / 850nm, -40°C~85°C
<b>SFP-S10-T</b>	1 Gigabit Fiber SFP Transceiver, Single Mode 10KM / LC / 1310nm, -40°C~85°C
<b>DIN-RACK-2U</b>	Din-Rail to 19" Rack Mount Adapter for all Din-Rail Mountable Products, 2U Height

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660