


ITRP-3805-SKL2-WG00

37.6" EN50155 Railway Full IP65 Fanless Panel PC



Transportation Panel PCs




Key Features

- Intel® 6th Gen Core i7/i5/i3/Celeron (Skylake-U) processor support
- 37.6" LCD, 1920 x 540, 1000 nits
- EN50155 Compliant for Railway Application
- Full IP65 and fanless design
- Support 24/36/48/72/96/110 VDC input with M12 connector
- Anti-Shock and vibration

Product Specification

System color	Black
Mechanical	Aluminum extrusion and heavy-duty steel
Display	
Display type	37.6" Resizing TFT LCD
Resolution	1920x540 pixel
Luminance/Brightness	1000 cd/m ²
Color	16.7M colors
Pixel pitch (H/V)	0.4788mm x 0.4788mm
Contrast ratio	8000:1
Viewing angle (H/V)	178°/178° (typ.)
Backlight MTBF	100,000 hrs (typ.)
Glass type	3mm Tempered Glass
Main System	
Processor	Intel® Core™ i7-6600U 2.6GHz dual coreprocessor (TDP 15W) Intel® Core™ i5-6300U 2.4GHz dual coreprocessor (TDP 15W) Intel® Core™ i3-6100U 2.3GHz dual coreprocessor (TDP 15W) Intel® Celeron® 3955U 2.0GHz dual coreprocessor (TDP 15W)
Chipset	Intel® Skylake-U integrated
Graphic	Intel® HD Gen. 9 Graphics
Memory	1 x 260-pin DDR4 2133MHz SDRAM; max. up to 16GB
System I/O	1 x COM ,1x HDMI, 2 x USB 2.0, 2 x LAN Connector Type: M12
Ethernet	2 x Gigabit Ethernet (1 x Intel® I210, 1 x Intel®I219LM)
Storage support	1 x mSATA
System indicators	N/A
System controls	N/A
Watchdog timer	Interval: Programmable 1 ~ 255 sec. Output: System reset
OS Support	Win7, Win8.1, Win10, Linux
Power supply	110 Vdc input, M12 connector (24/36/48/72/96 Vdc optional)
Mounting kit	VESA mount
Environment	
IP level	Full IP65
Operating temperature	EN50155 T1 ; -25°C ~ 55°C
Storage temperature	-40°C ~ 80°C
Vibration,Shock	EN50155
Relative humidity	0% ~ 90% (non-condensing)
Dimensions	1039.6 mm(W) x 67.8 mm(D) x 310.1 mm(H)
Weight	10.14 kg

Dimensions

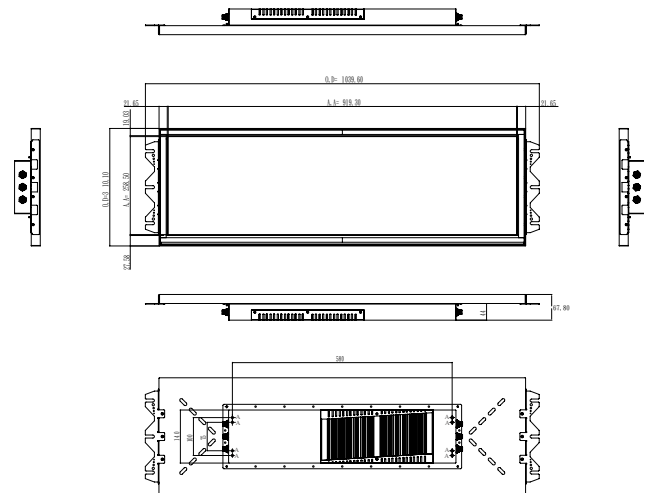

Ordering Information

Part Number	Description
ITRP-3805-SKL2-WG00-1001	IP65 Railway Fanless panel PC ,37.6", 1000nits, 1920x540, 3mm glass, Intel® Celeron® 3955U 2.0GHz dual core, 4GB DDR4,64GB mSATA,1HDMI, 2 USB, 1COM, 2LAN, DC110V input with M12 connector,EN50155
ITRP-3805-SKL2-WG00-2001	IP65 Railway Fanless panel PC ,37.6", 1000nits, 1920x520, 3mm glass, Intel® Core™ i3-6100U 2.3GHz dual core, 4GB DDR4,64GB mSATA,1HDMI, 2 USB, 1COM, 2LAN, DC110V input with M12 connector,EN50155
ITRP-3805-SKL2-WG00-3001	IP65 Railway Fanless panel PC ,37.6", 1000nits, 1920x520, 3mm glass, Intel® Core™ i5-6300U 2.4GHz dual core, 4GB DDR4,64GB mSATA,1HDMI, 2 USB, 1COM, 2LAN, DC110V input with M12 connector,EN50155
ITRP-3805-SKL2-WG00-4001	IP65 Railway Fanless panel PC ,37.6", 1000nits, 1920x520, 3mm glass, Intel® Core™ i7-6600U 2.6GHz dual core, 4GB DDR4,64GB mSATA,1HDMI, 2 USB, 1COM, 2LAN, DC110V input with M12 connector,EN50155

Accessories list

Part Number	Description
ITRP-001	2M M12 Cable for LAN
ITRP-002	2M M12 Cable for USB
ITRP-003	2M M12 Cable for COM
ITRP-004	2M M12 Cable for HDMI
ITRP-005	2M M12 Cable for Power

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660