


# IMB-X1244-WV

## Mini-ITX Motherboard

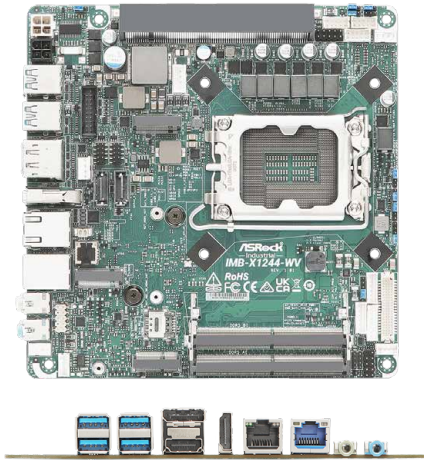

### KEY FEATURES

- Intel® 14th/13th/12th Gen (Raptor Lake-S Refresh/Raptor Lake-S/Alder Lake-S) Core™ Processors with W680 chipset
- 2 x 262-pin ECC/non-ECC SO-DIMM DDR5 4800/5600 MHz, up to 96GB (48GB per DIMM)
- 1 x Right Angle PCIe x16 (Gen4)
- 4 x USB 3.2 Gen2, 2 x USB 3.2 Gen1, 4 x USB 2.0, 1 x M.2 Key B, 1 x M.2 Key E, 2 x M.2 Key M, 3 x COM, 2 x SATA3
- 1 x Intel 2.5 Gigabit LAN, 1 x Intel 1 Gigabit LAN
- Supports Quad display, 2 x HDMI 2.0b, 1 x DP 1.4a, 1 x LVDS, 1 x eDP 1.4b
- Supports Intel® vPro, VMD RAID 0/1
- TPM 2.0 onboard IC
- 12~28V DC-In

### SPECIFICATIONS

#### Form Factor

Dimensions (LxWxH)	Mini-ITX (6.7-in x 6.7-in x 1.0-in, 17.0 cm x 17.0 cm x 2.6 cm)
--------------------	---

#### Processor System

CPU	Intel® 14th/13th/12th Gen (Raptor Lake-S Refresh/Raptor Lake-S/Alder Lake-S) Core™ Processors, up to 65W
Chipset	Intel® W680
Socket	LGA1700
BIOS	AMI SPI 256 Mbit

#### Memory

Technology	Dual Channel ECC/non-ECC DDR5 4800/5600 MHz* *Actual memory frequency depends on the CPU types and DRAM modules, for more information refer to <a href="https://www.asrockind.com/en-gb/index.php?route=newsblog/faq&amp;faq_id=90">https://www.asrockind.com/en-gb/index.php?route=newsblog/faq&amp;faq_id=90</a> technical FAQ *If motherboard ambient temp. is over 55°C, the memory thermal solution should be added to avoid thermal issue.
Capacity	96GB (48GB per DIMM)
Socket	2 x 262-pin SO-DIMM

#### Graphics

Controller	Intel® UHD Graphics
HDMI	HDMI 2.0b Max resolution up to 4096x2160@60Hz
DisplayPort	DisplayPort 1.4a, DP++ Max resolution up to 4096x2160@60Hz
LVDS	Dual channel 24 bit up to 1920x1200@60Hz
eDP	eDP 1.4b Max resolution up to 4096x2160@60Hz
MultiDisplay	Quad display

#### Expansion Slot

PCIe	1 x Right Angle PCIe x16 (Gen4, Support riser card x8/x8)
M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 and CNVi for Wireless 1 x M.2 (Key B, 3042/3052) with PCIe x1, USB 3.2 Gen1, USB 2.0 and SIM for 4G/5G
SIM Socket	1 x SIM socket connected to M.2 key B

#### Audio

Interface	Realtek ALC897, High Definition Audio. Line-out, Line-in
-----------	--

#### Ethernet

Controller/ Speed	LAN1: Intel® I226V with 10/100/1000/2500 Mbps LAN2: Intel® I219LM with 10/100/1000 Mbps, supports vPro
Connector	2 x RJ-45

#### Rear I/O

HDMI	2 x HDMI 2.0b
DisplayPort	1 x DP 1.4a++
Ethernet	1 x 2.5 Gigabit LAN 1 x 1 Gigabit LAN
USB	4 x USB 3.2 Gen2
Audio	2 (Line-in, Line-out or Mic-in, Line-out (optional))

#### Internal Connector

USB	2 x USB 3.2 Gen1 (1 x USB 3.2 header) 4 x USB 2.0 (2 x 2.54 pitch header)
COM	COM1, COM3 (RS-232/422/485) COM4 (RS-232)
GPIO	4 x GPI, 4 x GPO
LVDS	1
eDP	1
SATA PWR Output	1
Speaker Header	1

#### Storage

M.2	1 x M.2 (Key M, 2242/2280) with PCIe Gen4 x4 for SSD 1 x M.2 (Key M, 2242) with PCIe Gen4 x4 and SATA3 for SSD* *Recommend using M2x4-SATA-4P module to support extra 4 SATA ports (supported by special BIOS)
SATA	2 x SATA3 (6Gb/s)
RAID	Intel® VMD RAID 0/1 **supported by identical interface (PCIe or SATA) PCIe interface: M.2 Key B + M.2 Key M1/2 or 2 x M.2 Key M SATA interface: SATA port

#### Security

TPM	TPM 2.0 onboard IC
-----	--------------------

#### Watchdog Timer

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

#### Power Requirements

Input PWR	12~28V DC-In with 4-pin wafer PWR cable
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

#### Environment

Operating Temp	-20°C ~ 70°C
Storage Temp	-40° C ~ 85° C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660