

IPC970 NEW


Industrial System with LGA1200 Socket 10th Gen Intel® Xeon® and Core™ i7/i5/i3 Processors, Intel® W480E, Front-access I/O and PCIe Slots

Features

- 10th Gen Intel® Xeon® and Core™ i7/i5/i3 processors, up to 80W
- Intel® W480E chipset
- NVIDIA® RTX3090 GPU card
- Supports M.2 Key B slot for 5G wireless connection
- Supports M.2 Key E slot for Wi-Fi connection
- Supports RAID 0,1
- Supports power-on delay function
- Supports TPM 2.0



▲ Rear view

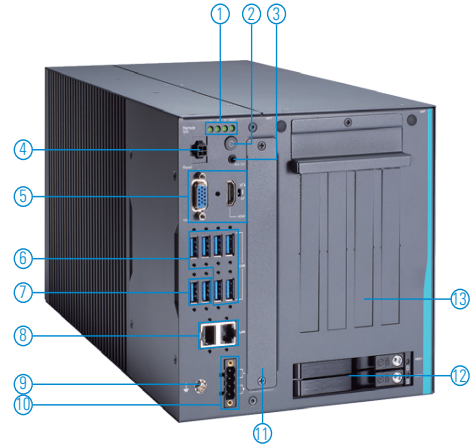

- | | |
|--|--------------------------------|
| 1. 1 x HDD/SSD access LED & 3 x user's LED | 10. 4-pin terminal block |
| 2. Power on/off button w/LED | 11. Flexible system I/O window |
| 3. Line-out | (1) AX93511 |
| 4. Remote power switch & Reset switch | (2) AX93512 |
| 5. VGA & HDMI & AT/ATX selectable switch | (3) AX93516 |
| 6. 6 x USB3.2 Gen.2 | (4) AX93519 |
| 7. 2 x USB3.2 Gen.1 | (5) Blank I/O cover |
| 8. 2 x LAN | 12. 2 x 2.5" SSD/HDD bay |
| 9. Ground terminal | 13. Expansion slot |



Specifications

Standard Color	Silver black	
Construction	Aluminum extrusion heavy-duty cold-rolled steel	
Processor System	CPU Level	10th Gen Intel® Xeon® and Core™ i7/i5/i3 processors (Cometlake-S), up to 80W*
	Chipset	Intel® W480E
System Memory	4 DDR4-2933 MT/s ECC or non ECC U-DIMM socket max. up to 128GB	
System I/O	Ethernet	1 x Intel® 2.5 Gigabit LAN (i225-LM) 1 x Intel® 1 Gigabit LAN (i211-AT)
	USB	6 x USB3.2 Gen.2 (10G) 2 x USB3.2 Gen.1 1 x USB 2.0 (internal, 180D type A for license key)
	Display	1 x VGA 1920 x 1200 resolution 1 x HDMI 4096 x 2304 @30Hz
	Audio	1 x Line-out
	Others	1 x Power on/off button w/LED (ATX) 1 x Remote power switch 1 x AT/ATX selectable switch (default ATX mode) 1 x 4-pin terminal block
	Flexible System I/O window	AX93511 4 x RS-232/422/485 module (default RS-232)
		AX93512 2 x RS-232/422/485 with isolated 1.5kVDC & 8-in/8-out with isolated 1.5kVDC DIO module
		AX93516 4 x RS-232/422/485 with isolated 2kVDC module
		AX93519 1 x 10/100/1000 Mbps (Intel® i211-AT) Ethernet, 2 x RS-232/422/485, and 2 x USB 3.0 (USB 2.0 signal) module
TPM	Blank I/O cover	
	TPM 2.0	

Expansion Interface	Slot 1-2: PCIe x8 (x4 signal)
	Slot 3 : PCIe x16
	Slot 4: blank
	1 x Full-size PCI Express Mini Card slot with SIM slot (USB & PCIe interface) 1 x M.2 Key E 2234 socket 1 x M.2 Key B 3042/3050 socket with SIM slot
Storage	2 x SSD/HDD drive bay (7/9.5mm height, external) 1 x SSD/HDD drive bay (optional, 7/9.5/15mm height, internal) (supports RAID 0,1) 1 x M.2 Key M 2280 socket (PCIe Gen3 x4) for NVMe SSD
System Indicators	1 x HDD/SSD access LED 3 x User's LED
Power Input	Type: ATX/AT Input: 24 VDC (uMin=19V/uMax=30V)
Operating Temperature	-10°C to +70°C (+14°F up to +149°F) with W.T. HDD/SSD*
Storage Temperature	-20°C to +80°C (-4°F to +176°F)
Humidity	10% to 90%, non-condensing
Dimensions	190 mm (7.48") (W) x 192 mm (7.55") (H) x 360 mm (14.17") (D)
Weight (net/gross)	9.8 kg/7.3 kg
Certifications	CE
EOS Support	Windows 10, Linux
Software Support	AXView

*Please refer to the user's manual for the system CPU support list and the system operating temperature list.

Ordering Information

System	
IPC970-10W-F5E1	Industrial system with Intel® W480 PCH, blank flexible I/O cover and 3 PCIe slots, without Axiomtek logo
Flexible System I/O Module	
AX93511 (P/N: 8816G974EA0E)	4 x RS-232/422/485 module (default RS-232)
AX93512 (P/N: 8816G974FA0E)	2 x RS-232/422/485 with isolated 1.5kVDC & 8-in/8-out with isolated 1.5kVDC DIO module
AX93516 (P/N: 8816G974GA0E)	4 x RS-232/422/485 with isolated 2kVDC module
AX93519 (P/N: 8816G974HA0E)	1 x 10/100/1000 Mbps (Intel® i211-AT) Ethernet, 2 x RS-232/422/485 & 2 x USB 3.0 (USB 2.0 signal) module

Optional Accessory

2.5" SATA HDD/SSD	
DDR4-2933 MT/s ECC or non ECC U-DIMM	
8816G9702A0E	External fan module kit
8816G9704A0E	Wall mount bracket kit
8816G9703A0E	Internal SSD/HDD bracket kit
8816G9700A0E	NVMe SSD bracket kit

Power Protection


DC Version

OVP (over voltage protection)
OCP (over current protection)
Reverse Protection

Packing List

- 1 x IPC970 unit
- 1 x Screw pack
- 4 x Foot pad
- 1 x CPU grease
- 1 x Terminal block
- 1 x Remote power switch cable
- 1 x Extension holder bracket kit
- 1 x HDD spacer
- 2 x graphics card power cable

Dimensions

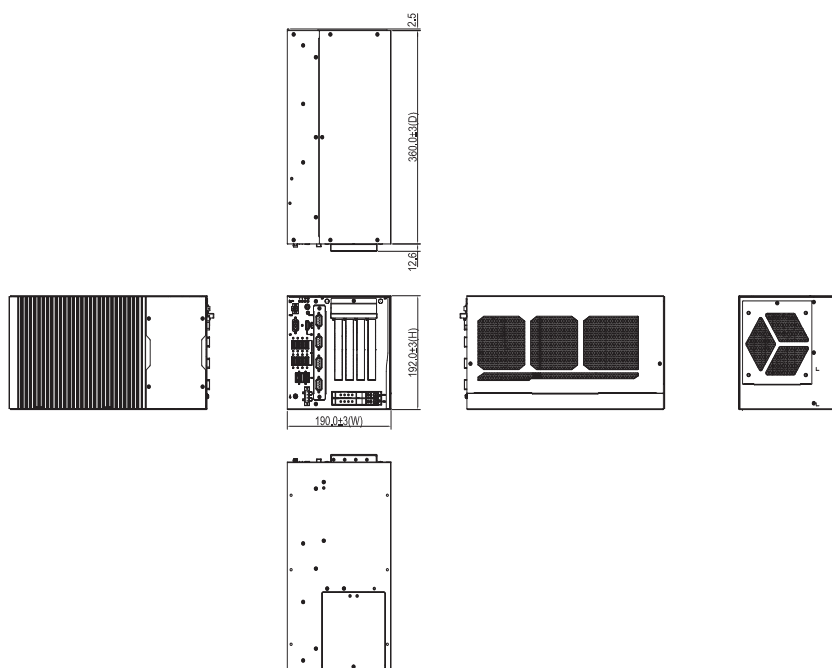

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660