

P6171-V3

17" SXGA TFT Industrial LCD Monitor

Features


- 17" SXGA TFT LED backlight LCD
- NEMA 4/12 (IP65) compliant flat panel monitor
- Supports panel mount, wall mount, rack mount and VESA arm
- Resistive touchscreen
- Full range screw-type (locked) AC-in or 24VDC in (optional)
- HDMI, DP and VGA with multi signal inputs



▲ Ultra-slim mechanism design



1. Menu
2. SEL+
3. SEL-
4. Exit
5. Power LED
6. Power switch



7. RS-232 or USB for Touch
8. Line-in
9. VGA
10. HDMI
11. DP
12. Screw type or Phoenix type power input

Introduction

The P6171-V3 is an ultra slim industrial LCD monitor, which adopts 17-inch 250 nits SXGA LED backlight LCD display and supports multi-signal interfaces including VGA, DisplayPort and HDMI. Featuring NEMA 4/12 & IP65 compliant front bezel, screw-type adaptor plug design, and 12/24V DC-in means it is fit for all kinds of industrial environments. Moreover, the P6171-V3 supports panel mount, wall mount, rack mount or VESA FPMPI (Video Electronics Standards Association Flat Panel Monitor Physical Mounting Interface) mounting. With the compact mechanism design, users can enjoy free from space constraint. It is especially suitable for POI/POS, excellent HMI and all kinds of heavy-duty industrial fields.

Specifications

Front Bezel	NEMA 4/12 (IP65)-compliant, metal front bezel
Mounting	Panel mount, wall mount, rackmount or VESA arm FPMPI mounting (video electronics standards association Flat Panel monitor physical mounting interface)
LCD Panel	Display 17" SXGA TFT LCD
	Max. Resolution 1280 x 1024
	Max. Colors 16.2 M
	Active Area (mm) 337.92 x 270.33
	Pixel Pitch (mm) 0.264 x 0.264
	Response Time 5ms
	Backlight LED backlight
	Backlight MTBF 30,000 hrs
	Viewing Angle (H/V) 170°/160°
Display Control	Contrast Ratio 1000 (TYP.)
	Brightness (cd/m ²) 250 nits
Input Signal	OSD (on screen display)
	DP
	VGA
	HDMI
Touchscreen: USB interface	


Specifications

I/O Connectors	1 x USB for touchscreen version 1 x Audio (Line-in) 1 x VGA 1 x DP 1 x HDMI 1 x Power input with screw type connector (AC version) 1 x Power input with terminal block (DC version)
Audio	2 x Speaker
Power Supply	AC version: 100 - 240 VAC-DC 12V3A, 36W power adapter DC version: 24 VDC
Power Consumption	19W
Touchscreen	Thickness Resistive: 3.2 mm Light Transmission Resistive: 80% Power Consumption Resistive: +5V @ 100mA Touch Life Resistive: 35 million touches Controller Interface: USB
Dimensions	410 mm (16.15") (W) x 338.3 mm (13.32") (H) x 58 mm (2.28") (D)
Packing Dimensions	500 mm (19.69") (W) x 517 mm (20.35") (H) x 176 mm (6.93") (D)
Weight (net/gross)	4.45 kg (9.82 lb)/6.71 kg (14.8 lb)
Operating Temperature	0°C to +45°C (+32°F to +113°F)
Relative Humidity	10% to 90% @ +40°C, non-condensing
Certifications	CE

Packing List

1 x P6171-V3 unit
1 x VGA cable
1 x USB cable for touch
1 x Adaptor (for AC version only)
1 x Audio cable
1 x 3-pin Terminal block (DC version only)

Dimensions

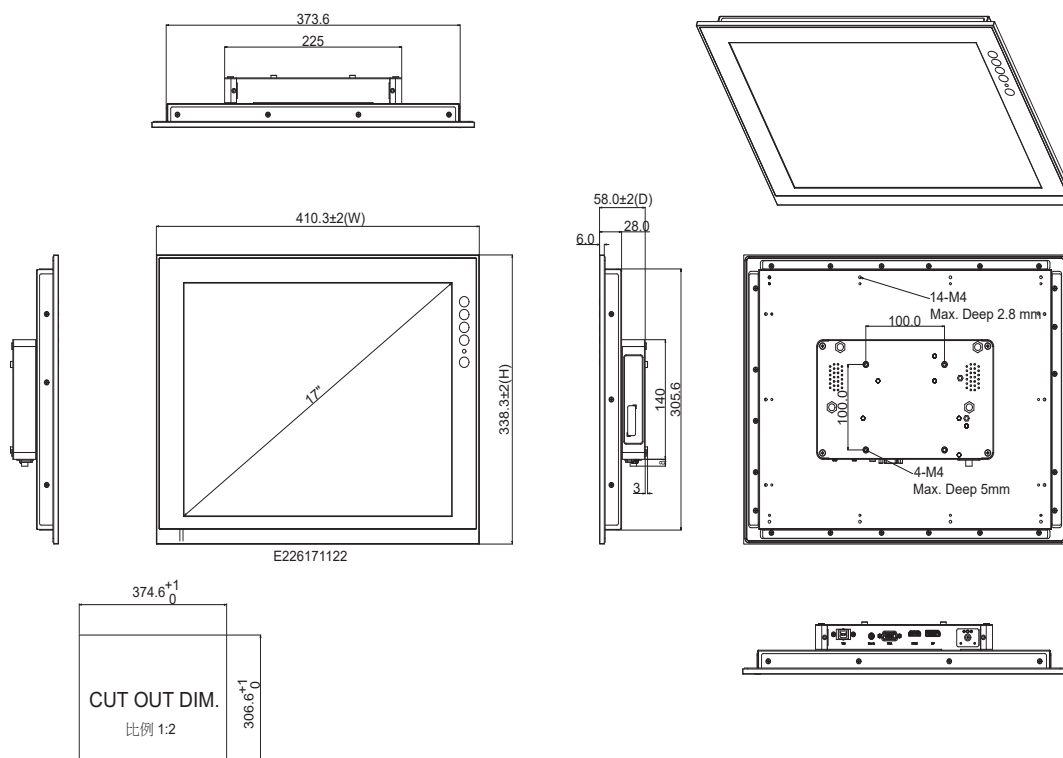

Ordering Information

P6171PR-AC-U-V3 (P/N: E226171122)	17" industrial resistive touch screen, AC version, USB interface
P6171PR-DC-U-V3	17" industrial resistive touch screen, DC version, USB interface

* Other configuration by request

* Specification and certifications may vary based on different requirements

Optional Accessories

59902000030E	US 1.8M power cord
59904000050E	EK 1.83M power cord
59903000080E	EU 1.83M power cord
5946L203800E	HDMI cable
5946L1713900E	DP cable
881231770A0E	Wall mount kit
881261711A0E	Panel mount kit
881261710A0E	Rack mount kit
E221177116	Desktop stand for 15.6" to 21.5"

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660