



28.1" Primary Control Monitor

Raptor[®] SQ2825




Design

Slim Bezels



The unobtrusive bezels are approximately 40% slimmer than the previous model, measuring just 36.1 mm on all sides so ATCOs can focus more on the screen.

Protection Glass




Protection glass is optional with two variations — standard and fully flat. Standard glass covers the visible part of the LCD panel and extends to the inner bezel. Fully flat glass reaches to the edges of the monitor for a smooth, streamlined look. The monitor's housing is built with edge protection for fully flat glass so it is not exposed and vulnerable to damage.

Rounded Corners




The monitor's design features rounded corners and edges for a pleasing and modern aesthetic.

Balanced Design




The monitor's depth has been reduced, bringing the weight distribution closer to the center of mass for less stress on mounting fixtures over time. It is also 50% lighter and more compact than the previous model, weighing just 14.6 kg.

Brightness Uniformity




The monitor's unique LED direct backlight system has 16% more LED cells than its predecessor for increased efficiency and performance. It offers superior brightness uniformity for smoother images compared to edge-type backlight solutions.

Mission-Critical Redundancy



The direct backlight system is divided into four interchangeable quadrants, each of which performs consistently over a lifetime of 100,000 hours. Each quadrant is controlled by two independent sub-unit driver boards that protect the on-screen information from being visually impacted in the unlikely event that an LED stops performing.

Wide Brightness Range




The monitor can be adjusted within a wide brightness range of 2 to 500 cd/m² to suit your environment's requirements as well as the needs of the ATCO.

Brightness Stabilization




EIZO's fully automated stability function uses an internal backlight sensor to stabilize the brightness level throughout the life of the monitor, compensating for fluctuations caused by variations in ambient temperature and the passage of time.

Mounting Flexibility



The newly designed rear housing can be easily configured to any mounting requirements without needing to remove any part of the housing. This ensures flexibility for meeting new installations or hardware changes that require desktop, VESA, chassis, panel mount or any combination thereof.

Energy Efficiency



The monitor consumes just 120 watts at maximum brightness (500 cd/m²) and even less under typical control room operating conditions. This saves energy and significantly reduces heat generation within the monitor; a leading cause of component failure.


Durability and Reliability

Industrial-Grade Housing



The monitor's housing uses full sheet steel industrial-grade housing for durability in demanding mission-critical environments.

Fanless Operation



The monitor provides noiseless, fanless operation while still maintaining low heat output without impacting performance.

Built-In Power Supply



The power supply of the monitor is built in, freeing the installation space of an additional power brick and cabling. A secondary power supply is available as an option.

24/7 Operation




The Raptor SQ2825 is developed specifically for meeting the stringent requirements of mission-critical ATC environments with 24/7 operation.

10+ Years of Primary Control Monitor Manufacturing

EIZO has been an industry leader in the innovation and development of quality 2K primary control monitors for ATC since 2005. Backed by over 45 years of technical expertise in visual display solutions, the Raptor SQ2825 is a 5th generation 2K x 2K monitor that culminates the features and functionality of EIZO's line of primary control monitors while adding further value with new technology and improved operational reliability.

Extensive Customization

EIZO offers extensive customization in order to meet the specific needs of individual control centers.

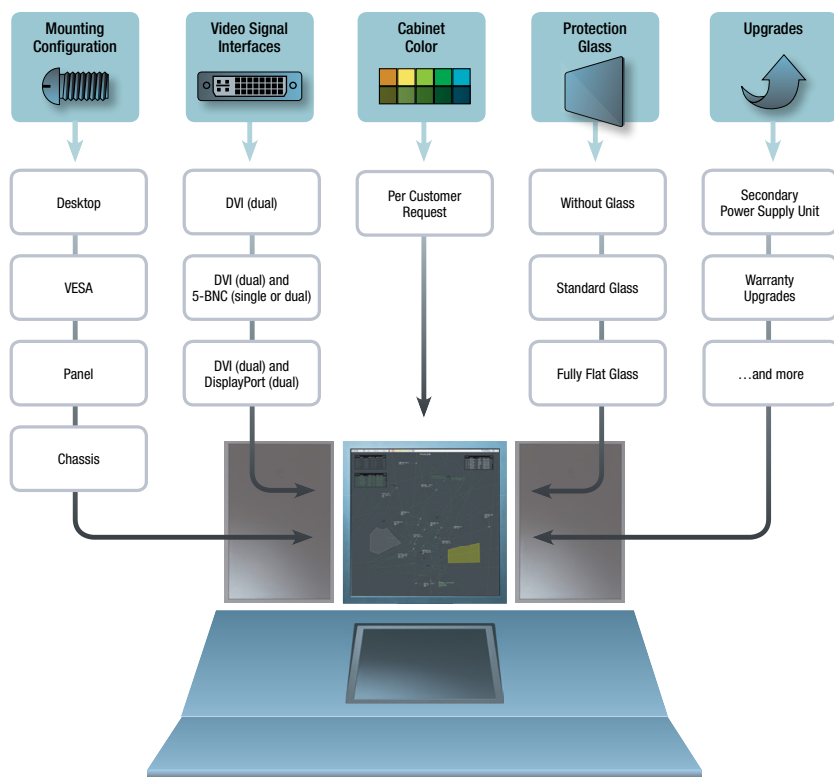

Contact us to configure your monitor.
atc@eizo.com

Complete Connection

Dual link DVI video signal inputs are included as standard as well as the option of additional DisplayPort or analog 5-BNC inputs. The monitor also comes equipped with a wide range of communication interfaces for connection to a network, remote monitor management, or maintenance purposes — RS232, RS422, USB, and TCP/IP.

Non-Intrusive Hardware Calibration

The monitor comes equipped with EIZO's hardware calibration functionality using the optional EIZO EACAL-R01 luminance meter. Easily accessed through the OSD menu, calibration of the backlight brightness, gamma, and white point can be carried out in just minutes. No additional software is needed, ensuring calibration operation is non-intrusive to your system.

Optional Accessories

EACAL-R01

External advanced serial luminance meter for high-precision monitor calibration.



EACON-S01

External OSD keyboard for control of a single monitor.



Specifications

Cabinet Color	Black
Panel	Type Backlight Size Native Resolution Viewable Image Size (H x V) Pixel Pitch Grayscale Tones Display Colors Viewing Angles (H / V, typical) Brightness (typical) Contrast Ratio (typical) Response Time (typical)
Video Signals	Input Terminals Digital Scanning Frequency (H / V) Analog Scanning Frequency (H / V) Sync Formats
USB	Function Standard
Power	Power Requirements Maximum Power Consumption Typical Power Consumption Standby Mode Power Management
Features and Functions	Brightness Stabilization OSD Languages Hardware Calibration External Keyboard Preset Modes Communication Protocol Communication Interface
Physical Specifications	Dimensions (With Stand, W x H x D) Dimensions (VESA Mount, W x H x D) Dimensions (Chassis Mount, W x H x D) Net Weight (With Stand, W x H x D) Net Weight (VESA Mount, W x H x D) Net Weight (Chassis Mount, W x H x D) Height Adjustment Range Tilt Swivel Hole Spacing (VESA Standard)
Environmental Requirements	Operating Temperature Operating Humidity (R.H., non condensing) Storage Temperature
Certifications & Standards	CE, UL, c-UL, FCC, RoHS, WEEE, CCC
Warranty	Two Years

EIZO Technologies GmbH

Bürgermeister-Seidl-Str. 8, 82515 Wolfraathausen, Germany
Phone : +49-8171-3492-11 Fax : +49-8171-3492-16
atc@eizo.com
www.eizoglobal.com

All product names and logos are trademarks or registered trademarks of their respective companies.
Raptor and EIZO are registered trademarks of EIZO Corporation.
Screen images provided by THALES.
Specifications are subject to change without notice.

Copyright © 2018 EIZO Corporation. All rights reserved.
Printed in Japan, 2, 2018, 0.5K (160806c)

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508

Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050

Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660