




Isolated Analog Signal Conditioning Products

SCM5B

SCM5B

Isolated SCM5B Analog Signal Conditioning Products

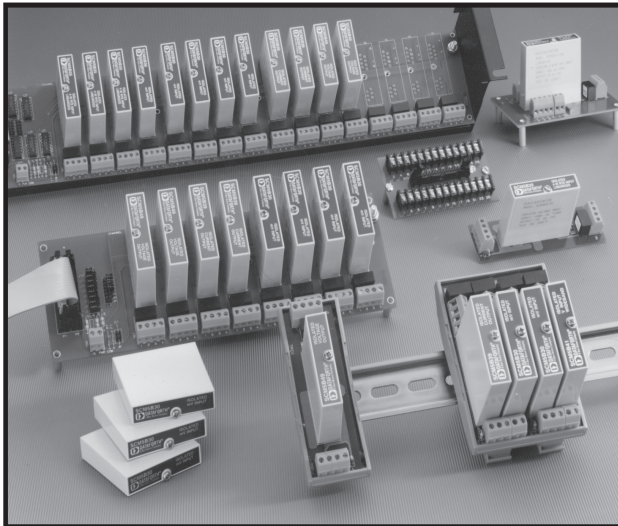

SCM5B Modules

Dataforth Corporation offers cost-effective, isolated industrial signal conditioning modules. The SCM5B analog modules are form, fit, and functional equivalents to similar products from other manufacturers. The product line includes a complete selection of backpanel options, interface cables, racks, fuses, jumpers, power supplies, and other accessory items.

Improved SCM5B Analog Modules

Each SCM5B module provides a single channel of isolated analog input or output. Input modules interface to all types of external sensors. The modules filter, isolate, amplify, and convert the input signal to a high-level analog voltage output. The output modules accept a high-level analog voltage signal from a host system, then buffer, isolate, and amplify before providing a process current or voltage output to field devices. Over 250 different SCM5B modules are available encompassing a wide selection of isolated analog input and output functions. Analog inputs include voltage and current in narrow and wide bandwidths, thermocouple, RTD, accelerometer, potentiometer, strain gage, frequency and 2-wire transmitter. Custom I/O ranges are also available. All modules are CSA certified and FM approved for safe operation in Class I, Division 2, Groups A, B, C, and D hazardous environments. They are also CE and ATEX compliant.

Accessories include addressable and non-addressable single, dual, 8- and 16-channel backpanels which include on-board temperature sensors and cold junction thermocouple compensation, power supplies, mounting racks, interface cables, and evaluation boards.

Dataforth SCM5B modules offer several advantages when compared with competitive parts, while maintaining equivalent price:

- **50 times better** noise rejection by using a **6-pole filter** with 95dB NMR, versus a 3-pole filter with 60dB NMR
- Lower output noise
- True 3-way isolation
- **20dB better** CMR of noise spikes than competing models

► Features

- 1500Vrms Transformer Isolation
- ±0.03% Accuracy
- 160dB CMR
- 95dB NMR
- ANSI/IEEE C37.90.1 Transient Protection
- ±1µV/°C Drift
- Output noise as low as 150µVrms
- 240VAC Protection for Field I/O
- -40°C to +85°C Operating Temperature Range
- CSA Certified (Class I, Division 2, Groups A, B, C, D)
- FM Approved (Class I, Division 2, Groups A, B, C, D)
- CE and ATEX Compliant

► Applications

- Designed for Industrial Plant Environments
- Protects User Equipment from Lightning and Heavy Equipment Power-Line Voltage
- Reduces Electrical Noise in Measured Signals
- Convenient System Expansion and Repair

Custom Signal Conditioning

Custom modules are available: consult factory for minimum quantity and pricing details on custom input ranges, output ranges, bandwidth, and other key parameters.



► **SCM5B Selection Guide**

SCM5B

ANALOG VOLTAGE INPUT MODULES, NARROW BANDWIDTH (4Hz BW) Page 6

MODEL	INPUT RANGE	OUTPUT RANGE [†]	
SCM5B30-01	±10mV	1, 2	
SCM5B30-02	±50mV	1, 2	
SCM5B30-03	±100mV	1, 2	
SCM5B30-04	±10mV	3, 4	
SCM5B30-05	±50mV	3, 4	
SCM5B30-06	±100mV	3, 4	
SCM5B30-07	±1V	1, 2	High Input Z
SCM5B31-01	±1V	1, 2	
SCM5B31-02	±5V	1, 2	
SCM5B31-03	±10V	1, 2	
SCM5B31-04	±1V	3, 4	
SCM5B31-05	±5V	3, 4	
SCM5B31-06	±10V	3, 4	
SCM5B31-07	±20V	1, 2	
SCM5B31-08	±20V	3, 4	
SCM5B31-09	±40V	1, 2	
SCM5B31-10	±40V	3, 4	

ANALOG CURRENT INPUT MODULES, 4Hz AND 1kHz BANDWIDTH Page 8

MODEL	INPUT RANGE	OUTPUT RANGE [†]	BW
SCM5B32-01	4 to 20mA	3, 4	4Hz
SCM5B32-02	0 to 20mA	3, 4	4Hz
SCM5B392-11	4 to 20mA	0 to +5V	1kHz
SCM5B392-12	4 to 20mA	±5V	1kHz
SCM5B392-13	4 to 20mA	0 to +10V	1kHz
SCM5B392-14	4 to 20mA	±10V	1kHz

ISOLATED TRUE RMS INPUT MODULES Page 10

MODEL	INPUT (rms)	OUTPUT RANGE (dc) [†]
SCM5B33-01	0-100mV	3, 4, 5, 6, 7
SCM5B33-02	0-1V	3, 4, 5, 6, 7
SCM5B33-03	0-10V	3, 4, 5, 6, 7
SCM5B33-04	0-150V	3, 4, 5, 6, 7
SCM5B33-05	0-300V	3, 4, 5, 6, 7
SCM5B33-06	0-1A	3, 4, 5, 6, 7
SCM5B33-07	0-5A	3, 4, 5, 6, 7

LINEARIZED 2- OR 3-WIRE RTD INPUT MODULES (0 to +5V OUTPUT[†], 4Hz BW) Page 12

MODEL	TYPE**	INPUT RANGE	OUTPUT RANGE [†]
SCM5B34-01	100Ω Pt	-100°C to +100°C (-148°F to +212°F)	3, 4
SCM5B34-02	100Ω Pt	0°C to +100°C (+32°F to +212°F)	3, 4
SCM5B34-03	100Ω Pt	0°C to +200°C (+32°F to +392°F)	3, 4
SCM5B34-04	100Ω Pt	0°C to +600°C (+32°F to +1112°F)	3, 4
SCM5B34-05	100Ω Pt	-100°C to +200°C (-148°F to +392°F)	3, 4
SCM5B34C-01	10Ω Cu at 0°C	0°C to +120°C (+32°F to +248°F)	3, 4
SCM5B34C-02	10Ω Cu at 25°C	0°C to +120°C (+32°F to +248°F)	3, 4
SCM5B34C-03	10Ω Cu at 0°	0°C to +160°C (+32°F to +320°F)	3, 4
SCM5B34N-01	120Ω Ni	0°C to +300°C (+32°F to +572°F)	3, 4

LINEARIZED 4-WIRE RTD INPUT MODULES (0 to +5V OUTPUT[†], 4Hz BW) Page 14

MODEL	TYPE**	INPUT RANGE	OUTPUT RANGE [†]
SCM5B35-01	100Ω Pt	-100°C to +100°C (-148°F to +212°F)	3, 4
SCM5B35-02	100Ω Pt	0°C to +100°C (+32°F to +212°F)	3, 4
SCM5B35-03	100Ω Pt	0°C to +200°C (+32°F to +392°F)	3, 4
SCM5B35-04	100Ω Pt	0°C to +600°C (+32°F to +1112°F)	3, 4
SCM5B35-05	100Ω Pt	-100°C to +200°C (-148°F to +392°F)	3, 4
SCM5B35C-01	10Ω Cu at 0°C	0°C to +120°C (+32°F to +248°F)	3, 4
SCM5B35C-02	10Ω Cu at 25°C	0°C to +120°C (+32°F to +248°F)	3, 4
SCM5B35C-03	10Ω Cu at 0°C	0°C to +160°C (+32°F to +320°F)	3, 4
SCM5B35N-01	120Ω Ni	0°C to +300°C (+32°F to +572°F)	3, 4

POTENTIOMETER INPUT MODULES (4Hz BW) Page 16

MODEL	INPUT RANGE	OUTPUT RANGE [†]
SCM5B36-01	0 to 100Ω	3, 4
SCM5B36-02	0 to 500Ω	3, 4
SCM5B36-03	0 to 1kΩ	3, 4
SCM5B36-04	0 to 10kΩ	3, 4

THERMOCOUPLE INPUT MODULES (0 to +5V OUTPUT[†], 4Hz BW) Page 18

MODEL	TYPE [†]	INPUT RANGE	OUTPUT RANGE [†]
SCM5B37J	J	-100°C to +760°C (-148°F to +1400°F)	3, 4
SCM5B37K	K	-100°C to +1350°C (-148°F to +2462°F)	3, 4
SCM5B37T	T	-100°C to +400°C (-148°F to +752°F)	3, 4
SCM5B37E	E	0°C to +900°C (+32°F to +1652°F)	3, 4
SCM5B37R	R	0°C to +1750°C (+32°F to +3182°F)	3, 4
SCM5B37S	S	0°C to +1750°C (+32°F to +3182°F)	3, 4
SCM5B37B	B	0°C to +1800°C (+32°F to +3272°F)	3, 4
SCM5B37C	C	+350°C to +1300°C (+662°F to +2372°F)	3, 4
SCM5B37N	N	-100°C to +1300°C (-148°F to +2372°F)	3, 4

STRAIN GAGE INPUT MODULES (±5V OUTPUT[†], 4Hz or 10kHz BW) Page 20

MODEL	INPUT	EXCITATION	OUTPUT RANGE [†]
	10kHz	4Hz	
SCM5B38-01	-31 ±10mV Full Bridge Input, (3mV/V)	+3.333V	1, 2
SCM5B38-02	-32 ±30mV Full Bridge Input, (3mV/V)	+10.000V	1, 2
SCM5B38-03	-33 ±10mV Half Bridge Input, (3mV/V)	+3.333V	1, 2
SCM5B38-04	-34 ±30mV Half Bridge Input, (3mV/V)	+10.000V	1, 2
SCM5B38-05	-35 ±20mV Full Bridge Input, (2mV/V)	+10.000V	1, 2
SCM5B38-06	-36 ±33.3mV Full Bridge Input, (10mV/V)	+3.333V	1, 2
SCM5B38-07	-37 ±100mV Full Bridge Input, (10mV/V)	+10.000V	1, 2

ANALOG CURRENT OUTPUT MODULES, 400Hz AND 1kHz BANDWIDTH Page 24

MODEL	INPUT RANGE	OUTPUT RANGE	BW
SCM5B39-01	0 to +5V	4 to 20mA	400Hz
SCM5B39-02	±5V	4 to 20mA	400Hz
SCM5B39-03	0 to +5V	0 to 20mA	400Hz
SCM5B39-04	±5V	0 to 20mA	400Hz
SCM5B39-05	0 to 20mA	0 to 20mA	400Hz
SCM5B39-07	±10V	±20mA	275Hz
SCM5B392-01	0 to +5V	4 to 20mA	1kHz
SCM5B392-02	±5V	4 to 20mA	1kHz
SCM5B392-03	0 to +10V	4 to 20mA	1kHz
SCM5B392-04	±10V	4 to 20mA	1kHz



Isolated Analog Signal Conditioning Products

SCM5B

► **SCM5B Selection Guide (Continued)**

MATCHED PAIR SERVO/MOTOR CONTROLLER DRIVERS (1kHz BW)
Page 26

MODEL	INPUT RANGE	INTERFACE	OUTPUT RANGE
SCM5B392-0111	0 to +5V	4 to 20mA	0 to +5V
SCM5B392-0212	±5V	4 to 20mA	±5V
SCM5B392-0313	0 to +10V	4 to 20mA	0 to +10V
SCM5B392-0414	±10V	4 to 20mA	±10V

ANALOG VOLTAGE INPUT MODULES, WIDE BANDWIDTH (10kHz BW) Page 28

MODEL	INPUT RANGE	OUTPUT RANGE ¹
SCM5B40-01	±10mV	1, 2
SCM5B40-02	±50mV	1, 2
SCM5B40-03	±100mV	1, 2
SCM5B40-04	±10mV	3, 4
SCM5B40-05	±50mV	3, 4
SCM5B40-06	±100mV	3, 4
SCM5B40-07	±1V	1, 2 High Input Z
SCM5B41-01	±1V	1, 2
SCM5B41-02	±5V	1, 2
SCM5B41-03	±10V	1, 2
SCM5B41-04	±1V	3, 4
SCM5B41-05	±5V	3, 4
SCM5B41-06	±10V	3, 4
SCM5B41-07	±20V	1, 2
SCM5B41-08	±20V	3, 4
SCM5B41-09	±40V	1, 2
SCM5B41-10	±40V	3, 4

2-WIRE TRANSMITTER INTERFACE MODULES (100Hz BW) Page 30

MODEL	INPUT RANGE	OUTPUT RANGE
SCM5B42-01	4 to 20mA	+1 to +5V
SCM5B42-02	4 to 20mA	+2 to +10V

GENERAL PURPOSE INPUT MODULES, DC EXCITATION Page 32

MODEL	MAXIMUM INPUT	OUTPUT ¹
SCM5B43-01	±1V	1, 2
SCM5B43-02	±2V	1, 2
SCM5B43-03	±3V	1, 2
SCM5B43-04	±4V	1, 2
SCM5B43-05	±5V	1, 2
SCM5B43-06	±6V	1, 2
SCM5B43-07	±7V	1, 2
SCM5B43-08	±8V	1, 2
SCM5B43-09	±9V	1, 2
SCM5B43-10	±10V	1, 2

FREQUENCY INPUT MODULES Page 34

MODEL	INPUT RANGE	OUTPUT RANGE ¹
±20mV HYST.	±400mV HYST.	
SCM5B45-01	SCM5B45-21	0 to 500Hz 3, 4
SCM5B45-02	SCM5B45-22	0 to 1kHz 3, 4
SCM5B45-03	SCM5B45-23	0 to 3kHz 3, 4
SCM5B45-04	SCM5B45-24	0 to 5kHz 3, 4
SCM5B45-05	SCM5B45-25	0 to 10kHz 3, 4
SCM5B45-06	SCM5B45-26	0 to 25kHz 3, 4
SCM5B45-07	SCM5B45-27	0 to 50kHz 3, 4
SCM5B45-08	SCM5B45-28	0 to 100kHz 3, 4

LINEARIZED THERMOCOUPLE INPUT MODULES (0 to +5V OUTPUT¹, 4Hz BW)
Page 36

MODEL	TYPE ¹	INPUT RANGE	OUTPUT RANGE ¹
SCM5B47J-01	J	0°C to +760°C (+32°F to +1400°F)	3, 4
SCM5B47J-02	J	-100°C to +300°C (-148°F to +572°F)	3, 4
SCM5B47J-03	J	0°C to +500°C (+32°F to +932°F)	3, 4
SCM5B47K-04	K	0°C to +1000°C (+32°F to +1832°F)	3, 4
SCM5B47K-05	K	0°C to +500°C (+32°F to +932°F)	3, 4
SCM5B47T-06	T	-100°C to +400°C (-148°F to +752°F)	3, 4
SCM5B47T-07	T	0°C to +200°C (+32°F to +392°F)	3, 4
SCM5B47E-08	E	0°C to +1000°C (+32°F to +1832°F)	3, 4
SCM5B47R-09	R	+500°C to +1750°C (+932°F to +3182°F)	3, 4
SCM5B47S-10	S	+500°C to +1750°C (+932°F to +3182°F)	3, 4
SCM5B47B-11	B	+500°C to +1800°C (+932°F to +3272°F)	3, 4
SCM5B47J-12	J	-100°C to +760°C (-148°F to +1400°F)	3, 4
SCM5B47K-13	K	-100°C to +1350°C (-148°F to +2462°F)	3, 4
SCM5B47K-14	K	0°C to +1200°C (+32°F to +2192°F)	3, 4
SCM5B47N-15	N	-100°C to +1300°C (-148°F to +2372°F)	3, 4

ACCELEROMETER INPUT MODULE (2.5kHz to 20kHz BW) Page 38

Gain, bandwidth, and excitation are switch-programmable

MODEL	INPUT RANGE	OUTPUT RANGE
SCM5B48-01	±10V max	±10V

VOLTAGE OUTPUT MODULES, 50mA DRIVE CAPACITY (400 Hz BW) Page 40

MODEL	INPUT RANGE	OUTPUT RANGE
SCM5B49-01	0 to +5V	±5V
SCM5B49-02	±5V	±5V
SCM5B49-03	±5V	0 to +5V
SCM5B49-04	0 to +10V	±10V
SCM5B49-05	±10V	±10V
SCM5B49-06	±10V	0 to +10V
SCM5B49-07	±5V	±10V

VOLTAGE ATTENUATOR SYSTEM Page 43

The SCMVAS is a two module system - see data sheet for selection of second module.

MODEL	INPUT RANGES		OUTPUT RANGE
	DCV MODULE	TRUE RMS MODULE	
SCMVAS-M100	±100V (70VAC Max)	±141V (100VAC)	±1V
SCMVAS-M200	±200V (141VAC Max)	±283V (200VAC)	±1V
SCMVAS-M300	±300V (212VAC Max)	±424V (300VAC)	±1V
SCMVAS-M400	±400V (282VAC Max)	±566V (400VAC)	±1V
SCMVAS-M500	±500V (353VAC Max)	±650V (460VAC)	±1V
SCMVAS-M600	±600V (424VAC Max)	not available	±1V
SCMVAS-M650	±650V (460VAC Max)	not available	±1V
SCMVAS-M700	±700V (495VAC Max)	not available	±1V
SCMVAS-MPT	1 to 1		

MODEL	DESCRIPTION
SCMVAS-PB8	Backpanel, 8-Channel
SCMVAS-PB8D	Backpanel, 8-Channel, DIN Rail Mount
SCMVAS-PB16	Backpanel, 16-Channel
SCMVAS-PB16D	Backpanel, 16-Channel, DIN Rail Mount

► SCM5B Selection Guide (Continued)

SCM5B

ACCESSORIES Starts on Page 48

MODEL	DESCRIPTION
SCMPB01	Non-multiplexed, 16-channel backpanel.
SCMPB01-1	Non-multiplexed, 16-channel backpanel, no CJC.
SCMPB01-2	SCMPB01 with DIN rail mounting option.
SCMPB01-3	SCMPB01-1 with DIN rail mounting option.
SCMPB02	Multiplexed, 16-channel backpanel.
SCMPB02-1	Multiplexed, 16-channel backpanel, no CJC.
SCMPB02-2	SCMPB02 with DIN rail mounting option.
SCMPB02-3	SCMPB02-1 with DIN rail mounting option.
SCMPB03	Single channel backpanel. Mounting hardware not included.
SCMPB03-2	SCMPB03 with DIN rail mounting hardware.
SCMPB04	Dual channel backpanel. Mounting hardware not included.
SCMPB04-1	Dual channel backpanel, DIN rail mount, no CJC.
SCMPB04-2	SCMPB04 with DIN rail mounting hardware.
SCMPB04-3	SCMPB04-1 with DIN rail mounting hardware.
SCMXBEFE	Base element with snap foot.
SCMXBE	Base element without snap foot.
SCMXSE	Side element.
SCMXVS	Connection pins.
SCMPB05	Non-multiplexed, 8-channel backpanel.
SCMPB05-1	Non-multiplexed, 8-channel backpanel, no CJC.
SCMPB05-2	SCMPB05 with DIN rail mounting option.
SCMPB05-3	SCMPB05-1 with DIN rail mounting option.
SCMPB06	Multiplexed, 8-channel backpanel.
SCMPB06-1	Multiplexed, 8-channel backpanel, no CJC.
SCMPB06-2	SCMPB06 with DIN rail mounting option.
SCMPB06-3	SCMPB06-1 with DIN rail mounting option.
SCMPB07	8-channel high-density backpanel.
SCMPB07-1	SCMPB07, no CJC.
SCMPB07-2	SCMPB07, DIN rail mount.
SCMPB07-3	SCMPB07, no CJC, DIN rail mount.
SCMXEV	Single channel SCM5B evaluation board.
SCMXCA004-xx	System interface cable for both analog backpanels.
SCMXRK-002	19-inch metal rack for mounting analog backpanels.
SCMXIF	Ribbon cable to screw terminal interface board.
SCMXIF-DIN	Universal Interface Board.
SCMXCJC	Encapsulated cold junction compensation circuit.
SCM5BPT	Pass Thru.
SCMXJP-003	Package of 10 jumpers.
SCMXFS-003	Package of 10, 4A fuses.
SCMXR1	Precision 20Ω resistor for SCM5B32 and SCM5B42.
SCM5B-PROTO	Breadboard Kit.
SCMXRAIL1-XX	DIN EN50022-35x7.5 (slotted steel), length -XX in meters.
SCMXRAIL2-XX	DIN EN50035-G32 (slotted steel), length -XX in meters.
SCMXRAIL3-XX	DIN EN50022-35x15 (slotted steel), length -XX in meters.
SCMXPRT-001	Power supply, 1A, 5VDC, 120VAC U.S.
SCMXPRT-001D	SCMXPRT-001 with DIN rail mounting option.
SCMXPRT-001E	Power supply, 1A, 5VDC, 220VAC European.
SCMXPRT-001D	SCMXPRT-001 with DIN rail mounting option.
SCMXPRT-003	Power supply, 3A, 5VDC, 120VAC U.S.
SCMXPRT-003E	Power supply, 3A, 5VDC, 220VAC European.

NOTES:

† OUTPUT RANGES AVAILABLE

Output Range	Part No. Suffix	Example
1. -5V to +5V	NONE	SCM5B30-01
2. -10V to +10V	D	SCM5B30-01D
3. 0V to +5V	NONE	SCM5B30-04
4. 0V to +10V	D	SCM5B30-04D
5. 4 to 20mA	C	SCM5B33-01C
6. 0 to 20mA	E	SCM5B33-01E
7. 0 to 1mA	B	SCM5B33-01B

† THERMOCOUPLE ALLOY COMBINATIONS

Standards: DIN IEC 584, ANSI MC96-1-82, JIS C 1602-1981

TYPE	MATERIAL
J	Iron vs. Copper-Nickel
K	Nickel-Chromium vs. Nickel-Aluminum
T	Copper vs. Copper-Nickel
E	Nickel-Chromium vs. Copper-Nickel
R	Platinum-13% Rhodium vs. Platinum
S	Platinum-10% Rhodium vs. Platinum
B	Platinum-30% Rhodium vs. Platinum-6% Rhodium
C	Tungsten-5% Rhenium vs. Tungsten-26% Rhenium
N	Nickel-14.2% Chromium-1.4% Silicon vs. Nickel-4.4% Silicon-0.1% Magnesium

****RTD STANDARDS**

TYPE	ALPHA	COEFFICIENT	DIN	JIS	IEC
100Ω Pt	0.00385		DIN 43760	JIS C 1604-1989	IEC 751
120Ω Ni	0.00672				
10Ω CU	0.004274				

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660