

IFB112

Robust RISC-based DIN-rail Fanless Embedded System with i.MX 6UL Processor, COM, CANbus, 2 LANs and DIO (2-in/1-out)

Features

- RISC-based (i.MX 6UltraLite) processor 528 MHz
- 256MB DDR3 SDRAM onboard
- 4GB eMMC flash onboard
- 1 Mini Card slots (Wi-Fi or 3G/4G)
- 1 CAN Bus
- 2 digital inputs and 1 digital output
- 9 ~ 48 VDC wide range power input with terminal block
- Embedded Linux operating system (Yocto)
- Fanless design
- Wide operating temperature range from -40°C to +70°C




Introduction

The IFB112 cost-effective DIN-rail fanless embedded system utilizes the low power RISC-based (i.MX 6UL) processor and is designed to withstand temperatures ranging from -40°C to +70°C for using in extreme operating environment and industrial automation applications.


The IFB112 features one RS-232/422/485 serial port, dual LAN, one CANbus, two digital input channels, one digital output channel, LED for user programming and one eMMC onboard 4 GB. Its vertical DIN-rail form factor makes it easy to install the system in a small cabinet. The ready-to-run IFB112 is specially designed for remote control/monitoring management applications like unmanned control room, industrial machine, automatic parking lot, traffic cabinet and more.

Specifications

Construction	Extruded aluminum and heavy-duty steel, IP40	
CPU	NXP i.MX 6UL processor, ARM® Cortex®-A7, 528 MHz	
System Memory	1 x DDR3-1600 onboard, 256 MB	
System I/O Outlet	Serial Port	1 x RS-232/422/485 (RS-232/422/485 interface select by Software)
	CAN Bus	1 x CAN 2.0 B (DB9 connector) Meets ISO 11898 standard Software control termination resistor 120 ohm can high speed up to 1Mbit/s for transmit/receive
LAN		2 x 10/100 Mbps Ethernet Magnetic isolation protection 1.5KV
	Relay	1 x Relay
USB		1 x USB 2.0
DIO		1 x DIO (2-in/1-out) DI: Wet/Dry DO: Wet DI: Input channels: 2 source type Input voltage: 0 to 24 VDC digital input levels for dry contacts: -Logic level 0: close to GND -Logic level 1: open Digital input levels for wet contacts : -Logic level 0: Close to GND -Logic level 1: +0.7 ~ +24 V max. DO: Output channels: 1, sink type Output current: max. 200 mA per channel On-state voltage: 24 VDC nominal, open
	Console Port	Yes For user setting with debug
EEPROM		1 x EEPROM (2 Kb)
Wireless		1 x Mini Card slot
		1 x SIM Card socket

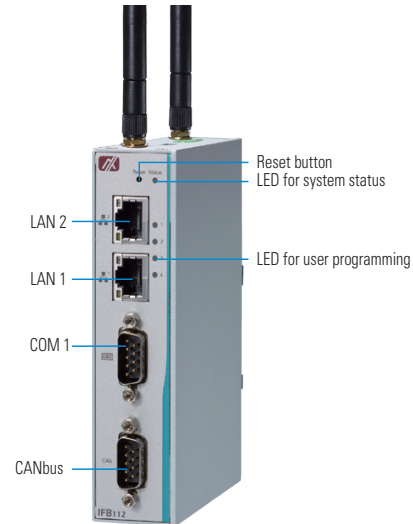

▲ Front view

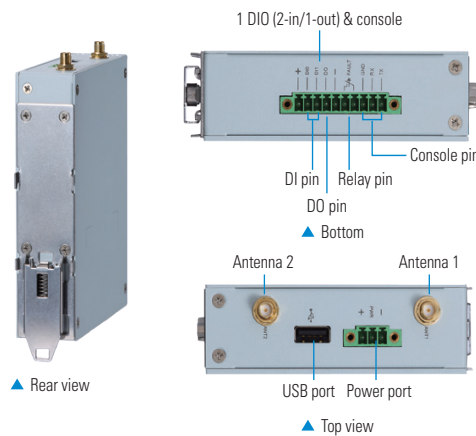

▲ Rear view

▲ Bottom

▲ Top view

Watchdog Timer	WDT 1: 0.5 to 128 sec. with a time resolution of 0.5 sec.
LEDs	1 x LED for power status 1 x LED for reset status 4 x LED (programming by client)
Storage	1 x eMMC 4GB flash onboard
Power Supply	9 ~ 48VDC power input range
Operating Temperature	-40°C ~ +70°C (-40°F ~ +158°F)
Storage Temperature	-45°C ~ +85°C (-49°F ~ +185°F)
Humidity	10% ~ 95%
Vibration Endurance	3 Gms @ (10 ~ 150Hz sine wave; operation)
Dimensions	31 mm (1.22") (W) x 100 mm (3.94") (D) x 125 mm (4.92") (H)
Weight (net/gross)	0.3 kg (0.66 lb)/0.44 kg (0.97 lb)
Installation	DIN-rail, wall mount
OS Linux	OS : Yocto 1.8.1 (Fido) Kernel: 3.14.52
Certificate	FCC Part 15
	Heavy Industrial CE

* All specifications and photos are subject to change without notice.

Ordering Information


Standard

IFB112-FL-DC Robust DIN-rail fanless embedded system with i.MX 6UL processor, COM, CANbus, 2 LANs and DIO (2-in/1-out) (-40°C ~ +70°C)

Optional

Wall mount kit
Wireless (3G/GPS or Wi-Fi) module

Dimensions

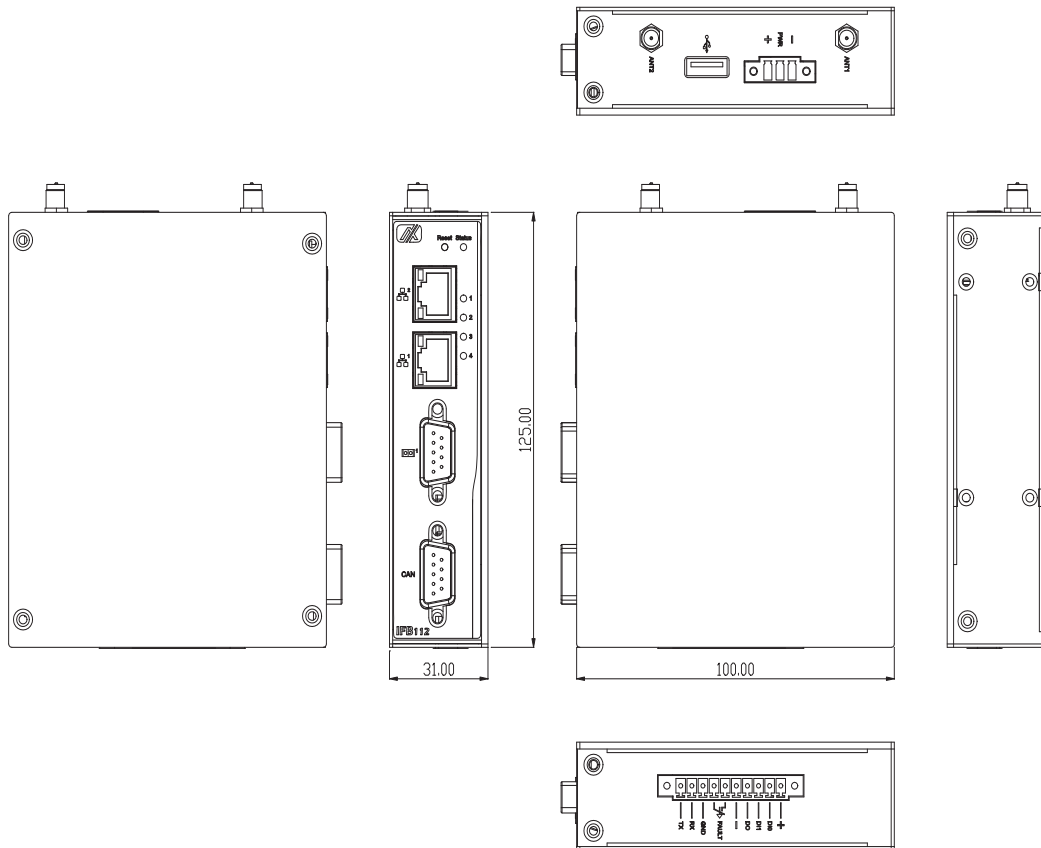

DIN-rail Embedded Systems

- 1
- 2
- 3
- 4
- 5
- 6
- 7
- 8
- 9

* All specifications and photos are subject to change without notice.



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660