




3rd/2nd Gen Intel® Core™
COM Express® Basic

CR960-HM76

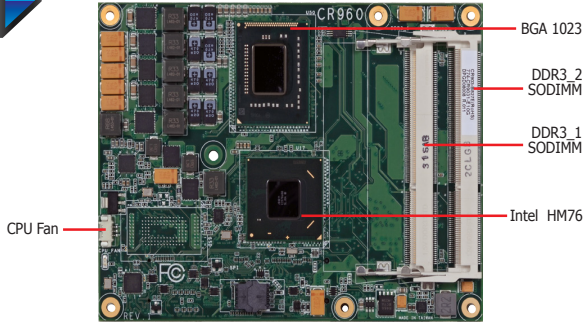


Features


MEMORY	2 DDR3/DDR3L SODIMM up to 16GB
EXPANSION	1 PCIe x16, 7 PCIe x1 1 LPC, 1 SMBus, 1 I ² C, 2 serial 1 VGA, 1 LVDS, 3 DDI (HDMI/DVI/DP/SDVO) 12 USB: 4 USB 3.0, 8 USB 2.0 4 SATA: 2 SATA 3.0, 2 SATA 2.0 SSD (optional) 4-bit input and 4-bit output GPIO
LAN	1 LAN
DIMENSIONS	COM Express® R2.1 Basic, Type 6 95mm x 125mm (3.74" x 4.9")



Mechanical Drawing

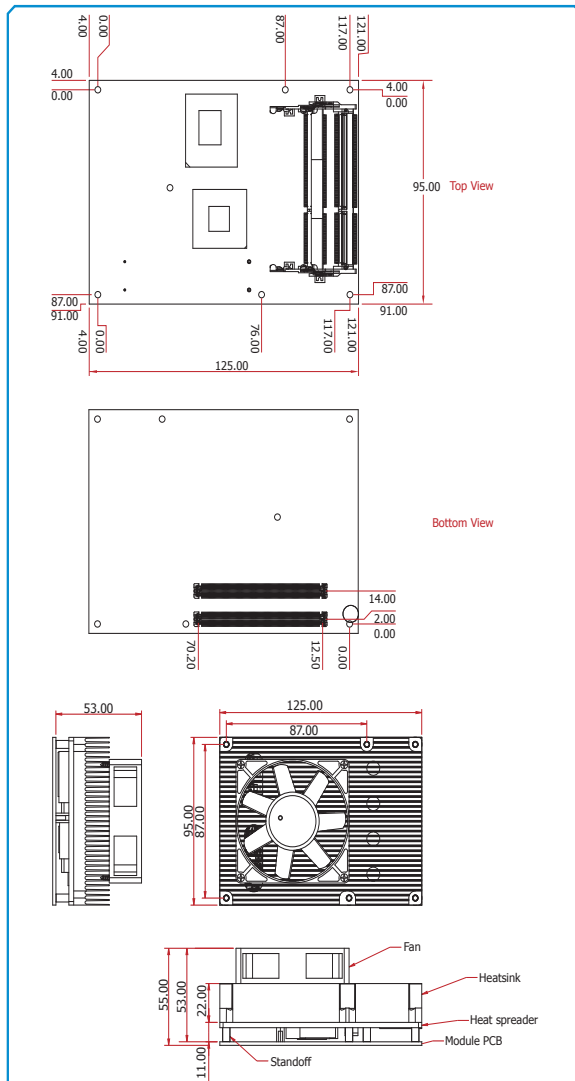

Block Diagram

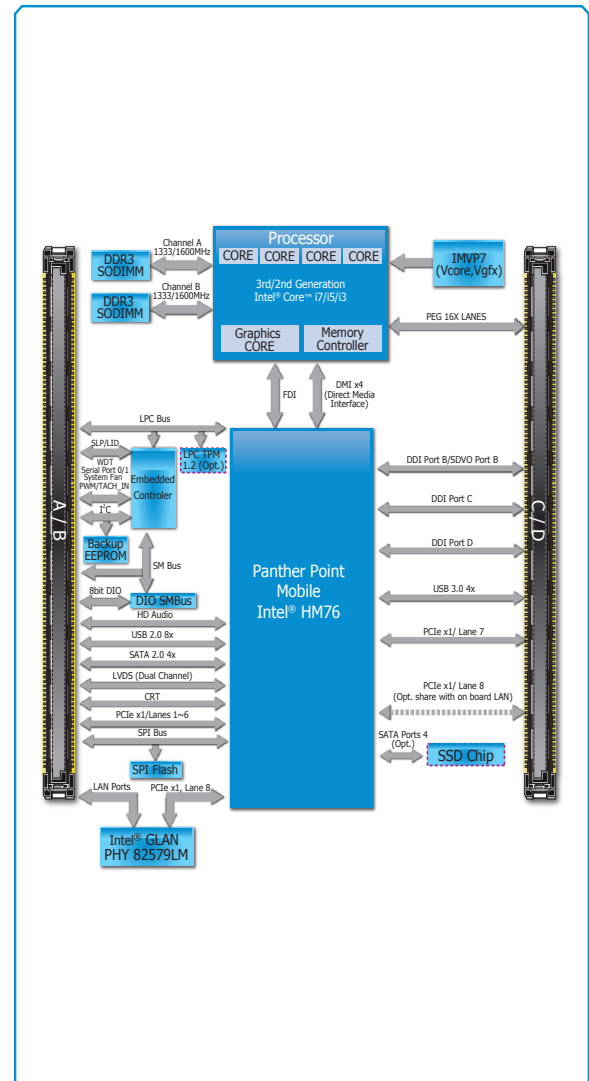

3rd/2nd Gen Intel® Core™
COM Express® Basic



CR960-HM76

Specifications

* Optional and is not supported in standard model. Please contact your sales representative for more information.

PROCESSOR

- BGA 1023 packaging technology
 - 3rd generation Intel® Core™ processors (22nm process technology)
 - 2nd generation Intel® Core™ processors (32nm process technology)
- Please refer to the Ordering Information below

CHIPSET

- Intel® HM76 Express Chipset

SYSTEM MEMORY

- Two 204-pin DDR3/DDR3L SODIMM sockets
- 3rd generation processors
 - Supports DDR3/DDR3L 1333/1600 MHz
- 2nd generation processors
 - Supports DDR3 1066/1333 MHz
- Supports dual channel memory interface
- Supports up to 16GB system memory
- DRAM device technologies: 1Gb, 2Gb and 4Gb DDR3 DRAM technologies are supported for x8 and x16 devices, unbuffered, non-ECC

ONBOARD GRAPHICS FEATURES

- Intel® HD Graphics 4000 (3rd generation processors)
- Intel® HD Graphics 3000 (2nd generation processors)
- Intel® HD Graphics (Intel® Celeron™ processors)
- Supports VGA, LVDS and DDI interfaces
- VGA: resolution up to 2048x1536 @ 75Hz
- LVDS: Single Channel - 18/24-bit; Dual Channel - 36/48-bit, resolution up to 1920x1200 @ 60Hz
- Digital Display Interfaces: HDMI, DVI, DP or SDVO (for Port B)
- HDMI, DVI, DP: resolution up to 1920x1200 @ 60Hz
- Intel® Clear Video Technology
- DirectX Video Acceleration (DXVA) for accelerating video processing
 - Full AVC/VC1/MPEG2 HW Decode
- Supports DirectX 11/10.1/10/9 and OpenGL 3.0 (3rd generation processors)
- Supports DirectX 10.1/10/9 and OpenGL 3.0 (2nd generation processors)

ONBOARD AUDIO FEATURES

- Supports High Definition Audio interface

ONBOARD LAN FEATURES

- Intel® 82579LM Gigabit Ethernet PHY
- Integrated 10/100/1000 transceiver
- Fully compliant with IEEE 802.3, IEEE 802.3u, IEEE 802.3ab

SERIAL ATA (SATA) INTERFACE

- Supports 4 Serial ATA interfaces
- 2 SATA 3.0 with data transfer rate up to 6Gb/s
- 2 SATA 2.0 with data transfer rate up to 3Gb/s
- Integrated Advanced Host Controller Interface (AHCI) controller

SSD*

- 2GB/4GB/8GB/16GB/32GB/64GB
- Write: 30MB/sec (max), Read: 70MB/sec (max)
- SATA to SSD onboard

TRUSTED PLATFORM MODULE (TPM)*

- Provides a Trusted PC for secure transactions
- Provides software license protection, enforcement and password protection

EXPANSION INTERFACES

- Supports 4 USB 3.0 ports
- Supports 8 USB 2.0 ports
- Supports 1 PCIe x16 interface
- Supports 7 PCIe x1 interfaces
- Supports LPC interface
- Supports I²C interface
- Supports SMBus interface
- Supports 2 serial interfaces (TX/RX)
- Supports 4-bit input and 4-bit output GPIO

BIOS

- 64Mbit SPI BIOS

WATCHDOG TIMER

- Watchdog timeout programmable via software from 1 to 255 seconds

POWER

- Input: 5VSB*, 12V, VCC_RTC

POWER CONSUMPTION

- TBD

OS SUPPORT

- Windows XP Professional x86 & SP3 (32-bit)
- Windows XP Professional x64 & SP2 (64-bit)
- Windows 7 Ultimate x86 & SP1 (32-bit)
- Windows 7 Ultimate x64 & SP1 (64-bit)
- Windows 8 Enterprise x86 (32-bit)
- Windows 8 Enterprise x64 (64-bit)

TEMPERATURE

- 0°C to 60°C

HUMIDITY

- 5% to 90%

PCB

- Dimensions: 95mm (3.74") x 125mm (4.9")
- Compliance: PICMG COM Express® R2.1 basic form factor, Type 6

Ordering Information

Model Name	Processor	SODIMM	SSD	Power	Thermal	Temperature
CR960-HM76BS0-810E	Intel® Celeron™ B810E, 2M Cache, 1.6GHz, 35W	2 (16GB DDR3L)	None	ATX/AT	Fan	0°C to 60°C
CR960-HM76BS0-847E	Intel® Celeron™ 847E, 2M Cache, 1.1GHz, 17W	2 (16GB DDR3L)	None	ATX/AT	Fan	0°C to 60°C
CR960-HM76BS0-827E	Intel® Celeron™ 827E, 1.5M Cache, 1.4GHz, 17W	2 (16GB DDR3L)	None	ATX/AT	Fan	0°C to 60°C
CR960-HM76BS0-1020E	Intel® Celeron™ 1020E, 2M Cache, 2.20 GHz, 35W	2 (16GB DDR3L)	None	ATX/AT	Fan	0°C to 60°C
CR960-HM76BS0-3610ME	Intel® Core™ i5-3610ME, 3M Cache, 2.7GHz (3.3GHz), 35W	2 (16GB DDR3L)	None	ATX/AT	Fan	0°C to 60°C

The following specifications will be available upon request. Please contact your sales representative for more information.

Model Name	Chipset	Temperature	Memory	SSD	Processors
CR960	- HM76	B	S	0	3615QE
		B: 0°C to 60°C	S: Socket	0: None 2: 2GB 4: 4GB 8: 8GB 1: 16GB 3: 32GB 6: 64GB	3rd Generation 3610ME: Intel® Core™ i5-3610ME, 3M Cache, 2.7GHz (3.3GHz), 35W 1020E: Intel® Celeron™ 1020E, 2M Cache, 2.20 GHz, 35W 2nd Generation 810E: Intel® Celeron™ B810E, 2M Cache, 1.6GHz, 35W 847E: Intel® Celeron™ 847E, 2M Cache, 1.1GHz, 17W 827E: Intel® Celeron™ 827E, 1.5M Cache, 1.4GHz, 17W

Packing List

- 1 CR960 board
- 1 DVD
- Heat spreader with heat sink and fan: 761-CR9601-000G

Optional Items

- COM331-B carrier board kit: 770-COM331-000G

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660