


Rugged Embedded



PB-9250J-SA/ PB-4600J-SA

Industrial-grade Standalone Intelligent Supercapacitor-based Uninterruptible Power Backup Module



CE FC

Key Features

- Universal standalone power backup module compatible with all box-PCs
- Supercapacitor-based, -25 to 65°C wide temperature operation
- 9250 watt-second energy capacity
- Maximum 180W output power for the connected back-end system
- Over 10 years lifespan, and 500,000 charging/ discharging cycles
- Patented CAP energy management technology*
- Extending back-up time in the event of an unforeseen power outage
- Monitoring energy and power consumption to extend operation time for safe system shutdown
- Versatile operating mode
 - Normal backup mode
- Ignition control mode for standard box-PC and in-vehicle controller
- EN50155 certificate

Contact Neosys

Get Quote


*R.O.C Patent No. I598820

Introduction

PB-9250J-SA is a standalone power backup module that can protect your box-PC against power outages. Utilizing state-of-the-art supercapacitor technology, it can operate in harsh environments from -25 to 65°C, and have extremely high durability lasting over 10 years.

PB-9250J-SA is composed of eight 370F/ 3.0V supercapacitors, which offers much longer lifespan than its 2.7V counterpart, and stores 9250 watt-second energy to offer extra extended operation time to backup your system. Thanks to Neosys' patented CAP energy management technology, it can reliably supply 180W power to the back-end system and automatically manage boot and shutdown without installing additional drivers/ software. In addition to UPS-like power backup mode, it also offers two advanced ignition control modes for in-vehicle usage. PB-9250J-SA can work with either standard box-PC or in-vehicle controller to provide stable power supply and execute user-configurable power-on/ power-off delay according to IGN signal input.

Featuring various modes, automatic shutdown control and up to 180W output power, PB-9250J-SA can work with most off-the-shelf box-PCs. And with properties such as maintenance-free energy storage and uninterruptible power supply, PB-9250J-SA can prevent the connected back-end system from data loss during power outage in harsh industrial environments!

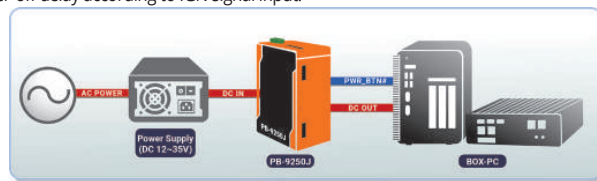

Specifications

	PB-9250J-SA	PB-4600J-SA
Supercapacitor Configuration		
Composition	8x 370F, 3.0V supercapacitors	4x 370F, 3.0V supercapacitors
Capacity	9250 watt-second	4600 watt-second
Expected lifespan	>10 years *	
Lifecycle	500,000 charging/ discharging cycles*	
Power Specification		
Input Voltage	12~35 VDC	
Input Connector	1x 3-pin pluggable terminal block (V+, GND, IGN_IN)	
Output Voltage	Charge mode: DC_IN bypass (DC_OUT = DC_IN) Discharge mode: 12 or 24V	
Output Power	Maximum 180W output**	Maximum 100W output**
Output Connector	1x 3-pin pluggable terminal block (V+, GND, IGN_OUT)	
I/O Interface		
COM Port	1x DB9 for 3-wire RS-232	
Isolated DIO	1x 10-pin pluggable terminal block for - PWR_BTN# output - SYS_STAT input	

	PB-9250J-SA	PB-4600J-SA
Mechanical		
Dimension	82.5mm(W) x 175.2mm(H) x 128.2mm(D)	
Weight	1.7 kg	1.68kg
Mounting	DIN-rail mount (standard) or Wall-mount (optional)	
Environmental		
Operating Temperature	-25°C ~ 65°C -40°C ~ 85°C with reduced energy capacity	
Storage Temperature	-40°C ~ 85°C	
Vibration	Compliant with IEC61373:2010, Category 1, Class B Body mounted (part of EN50155)	
Shock	Compliant with IEC61373:2010, Category 1, Class B Body mounted (part of EN50155)	
EMC	Compliant with EN50155:2007, CE/FCC Class A, according to EN 55032 & EN 55035	

* To achieve > 10 years lifespan under 24/7 at 65°C operation, please charge PB-9250J-SA to 6525J energy level using the 4.8x SuperCAP Lifetime Extension setting (please refer to the user manual for details). Once the rated lifetime or cycle life has been reached, the capacity of supercapacitor may decrease up to 30% and ESR may increase up to 100% from initial values.

** Backup time for uninterruptible operation may be reduced when sustaining a back-end system with high power consumption.

Ordering Information

Model No.	Product Description
PB-9250J-SA	Standalone intelligent supercapacitor-base power backup module with 9250 W-s energy capacity
PB-4600J-SA	Standalone intelligent supercapacitor-base power backup module with 4600 W-s energy capacity

Optional Accessories

Wmkit-V-PB9250J	Wall-mount assembly for PB-9250J-SA Series, vertical type
-----------------	---

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660