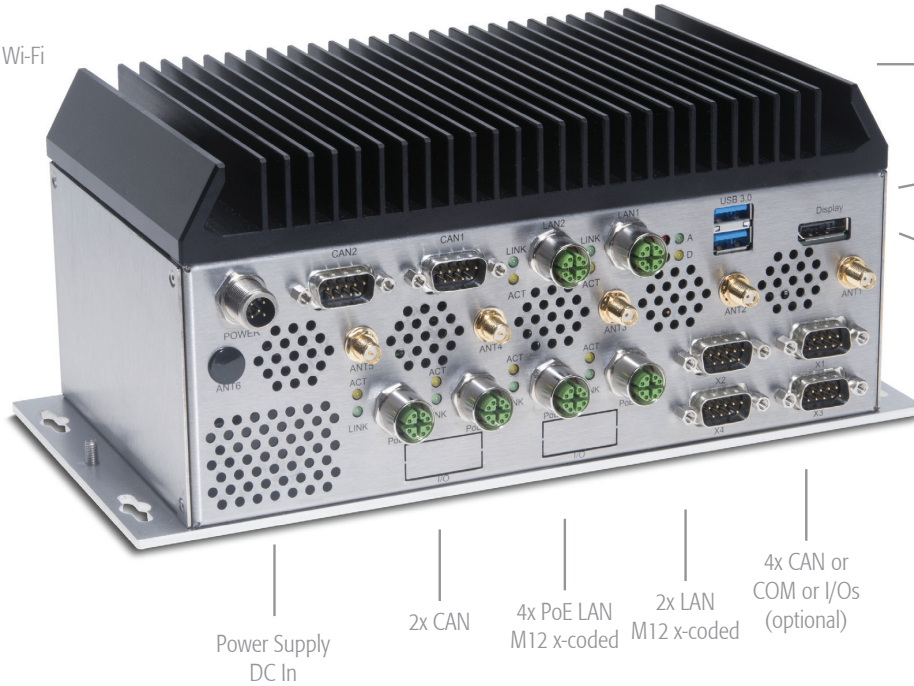


AI Vehicle Computer

**COMPACT AI Vehicle Series**

Intelligent Machine Learning Unit with NVIDIA Jetson AGX Xavier

LTE / GNSS / Wi-Fi  

Dual nanoSIM  
CFast  
uSD

2x USB 3.1

DP

Power Supply  
DC In

2x CAN

4x PoE LAN  
M12 x-coded

2x LAN  
M12 x-coded

4x CAN or  
COM or I/Os  
(optional)

AI Vehicle Computer

**IPC/COMPACT A3 - RML-DEV**

This fanless RML-COMPACT-A3 DEV generation is based on the NVIDIA Jetson AGX Xavier processor module and offers a wide range of interface options. The robust and uncompromising industrial design allows the implementation in the most demanding AI applications and guarantees long term availability.

- 24/7 continuous operation
- Highly customizable interface options
- Extended AI Computing
- Power over Ethernet (PoE+), 48VDC out
- High Accuracy GNSS option

 **NVIDIA.** Linux for Tegra (L4T)

**Product Highlights**

Goldcap or battery RTC clock backup  
No moving parts / passive cooling  
Each LAN interface has its own dedicated NIC  
Hardware watchdog  
Temperature supervision  
ESD- protection on all interfaces  
Long term availability (fixed BOM)  
Shock and vibration resistant

**Product Features**

512-core NVIDIA Volta™ GPU with 64 Tensor Cores  
8-Core ARM v8.2 64-bit NVIDIA Carmel CPU  
32GB 256-Bit LPDDR4x RAM soldered on board  
Socket for CFast  
Ethernet, USB, Passive or Active CAN  
Aluminum & Stainless steel housing

**Markets / Applications**

Production and Industrial Automation  
Automated Guided Vehicles (AGV)  
Transportation  
Logistics  
Robotics  
  
Railway (rolling stock)



	Order Code	IPC/RMLA3K22-DEV1 <sup>1</sup>	IPC/RMLA3K22-DEV2 <sup>1</sup>
<b>Processor module / Performance</b>			
NVIDIA Jetson AGX Xavier (32GB)   512-Core NVIDIA Volta™ GPU with 64 Tensor Cores		•	•
8-Core ARM v8.2 64-bit NVIDIA Carmel CPU			
AI Performance		32 TOPs	32 TOPs
<b>Memory / Storage</b>			
Data L3 Cache Size		4MB	4MB
256-Bit LPDDR4x RAM soldered on board		32GB	32GB
eMMC 5.1 Flash Storage on board		32GB	32GB
microSD Card socket		1	1
M.2 socket <sup>2</sup>		1	1
CFast socket with retention frame <sup>2</sup>		1	1
<b>Features</b>			
Real time clock PC with Goldcap backup (charge holds 48h)		•	optional
Real time clock PC with battery backup Renata CR2477 (950 mAh)		optional	•
Hardware Watchdog & Temperature supervisor		•	•
Intelligent power management		•	•
<b>Communication Interfaces</b>			
Graphic interface		DisplayPort 1.2	DisplayPort 1.2
USB version 3.0 (Type A)		2	2
Internal USB version 2.0 OTG <sup>behind the cover</sup> (micro USB Type AB)		1	1
Ethernet 10/100/1000Mbit (M12 female x-coded)		2	2
Power over Ethernet - IEEE802.3at 10/100/1000Mbit (M12 female x-coded)		4	4
PSE - Power sourcing equipment, directly producing 48VDC-out for PoE device		(total max power: 39W)	(total max power: 39W)
Active/passive-CAN ESD protected, isolated (DSUB9)		2	2
1-4 additional Active/passive-CAN ESD protected, isolated (DSUB9)		optional	optional
Serial Interface RS232 / RS422/485 ESD protected (DSUB9)		optional	optional
Digital I/O's, 24VDC (up to 4 inputs & 4 outputs)		optional	optional
Analog input, 16bit resolution, voltage input: -10 ...+10V / 0 ... 30V <sup>Accuracy: +/- 0.1%</sup> (4 inputs)		optional	optional
Analog input, 16bit resolution, current: 0-20mA (4 inputs)		optional	optional
Mini PCIe socket <sup>2</sup>		1	1
I2C bus <sup>2</sup>		•	•
Buzzer		•	•
<b>Wireless Connectivity</b>			
Cellular 4G Module (GSM/UMTS/LTE) Telit or Sierra Wireless - M2M only!		2x SMA	2x SMA
Dual SIM Support (nanoSIM to mPCIe slot)		•	•
Positioning Wireless Module (GPS, Galileo, Glonass, Beidou) u-blox NEO-M8U Module incl. acceleration sensor		1x SMA	1x SMA
Acceleration / Motion Sensor STMicroelectronics ISM330DLC		•	•
Wireless LAN IEEE 802.11a/b/g/n/ac dual-band 2x2 MIMO		2x RP-SMA	2x RP-SMA
High Accuracy Positioning Wireless Module u-blox ZED-F9P		optional	optional
<b>Technical Data</b>			
Dimensions w230 x h110 x d127 mm (housing, incl. mounting)		•	•
Net weight in gram		tbd	tbd
Input voltage and reverse polarity protected (M12 5P male a-coded)		16.8 ... 45VDC (isolated)	9 ... 36VDC
Interruption of voltage supply time: EN50155 Class S2		> 10ms	n/a
Current consumption typ. in mA @ 24V without Add-Ins, idle		~400	~400
Power consumption typ. in Watt @ 24V without Add-Ins, idle		~10	~10
<b>Environmental Conditions</b>			
Operating temperature <sup>3</sup>		-25°C ... +60°C	-25°C ... +60°C
Storage temperature		-25°C ... +80°C	-25°C ... +80°C
Protection standard		IP20	IP20
Conformal coating <sup>4</sup>		on request	on request
Shock (designed to meet)		EN61373	EN60068-2-27
Vibration (designed to meet)		EN61373	EN60068-2-64
EMI-Conformity (designed to meet)		EN50121-3-2	EN55032 / EN55035
Safety (designed to meet)		EN62368-1	EN62368-1
Radio and Telecommunication (designed to meet)		RED	RED
MTBF @ 25°C ambient <sup>according to Telcordia SR-332, Environment GB, excluding battery and optional interfaces</sup>		~280 000h	~280 000h

<sup>1</sup> Please contact factory for minimum order quantities

<sup>2</sup> Internal connector

<sup>3</sup> Depending on installation situation and interface connection. Please see user documentation. <sup>4</sup> On all possible components (excl. NVIDIA Xavier Module, connectors and wireless devices)

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2020 Syslogic Datentechnik AG  
All rights reserved

Syslogic Datentechnik AG  
Täferstrasse 28  
CH-5405 Baden Dättwil

Version 1.1 | November 2020

For further information and support:  
info@syslogic.com  
support@syslogic.com  
www.syslogic.com

+41 56 200 90 40 Switzerland (Headquarters)  
+49 7741 9671-420 Germany and Austria



## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660