


WMP-191

19" Core 2 Duo Front Full Flat Medical Panel PC

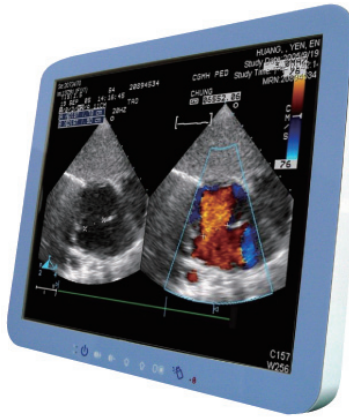

Key Features

- Front full flat resistive touch w/ IP65 protection
- Anti-bacteria plastic housing and medical 60601-1 3rd edition certification
- Core 2 Duo 2.2G CPU / Intel GME965 + ICH8M chipset
- 19" 1280x1024 350 nits high brightness LCD
- Full expansion capability with PCI slot, mini PCIe & mini PCI sockets
- Low noise variable speed fan and HDD anti-vibration design
- Integrated 2 watts x 2 speakers
- Optional WLAN, Bluetooth & anti-bacteria desktop stand

Main System

CPU	<ul style="list-style-type: none"> • Intel Core 2 Duo T7500 2.2GHz (dual core, 4MB L2 cache, 800MHz FSB) • Intel Celeron M550 2.0GHz (single core, 1MB L2 cache, 533MHz FSB) • Support PGA478 socket, 35W TDP (Max.)
Chipset	Intel GME965 + ICH8M
Graphics	GME965 integrated Media Accelerator X3100
Memory	4GB maximum, x 2 DDR2 SODIMM, 533/667/800MHz, 1GB/2GB/4GB
Serial ATA	SATA x 1, 150MB/s transfer rate
USB	USB 2.0, x 6 (x 4 external, x 2 internal)
COM	x 3 (external)
Audio	Realtek ALC268 audio codec, 2+2 watts amplifier
LAN	Realtek RTL8111B Gigabit Ethernet x 2
BIOS	<ul style="list-style-type: none"> • Award BIOS, 8M EEPROM • RTC wake up / Wake on LAN / Power on after power failure / PnP / ACPI
Speaker	2 watts x 2 (front bottom)

LCD Panel

Size	19" 5:4
Resolution	1280 x 1024 (SXGA)
Brightness	350 nits
Contrast	1000:1
Color numbers	16.7M colors (RGB 6bit + HiFRC)
Viewing angle	170 (H) / 160 (V)
Response time	5 ms (R + F)
Backlight	LED, 50,000 hours life time

Touch Panel

Type	Front full flat customized touch panel
Technology	Resistive touch, 5-wire
Light transmittance	84 ± 3%
Hardness	≥ 3H
Touch stylus	No limitation
Resolution	2048 x 2048
Life time	35 million activations

Storage & Expansion

HDD	2.5" SATA HDD drive bay x 1 + anti-vibration kit, 160GB / 500GB
Expansion slot	<ul style="list-style-type: none"> • PCI slot x 1 • Card size: 100 x 220 x 12/2 mm • Mini PCIe x 1 (52 pin card-edge type) · Mini PCI x 1

I/O & Control Keys

USB	USB 2.0 x 4
COM	DB-9 x 3 (RS232 x 2, RS232/422/485)
LAN	RJ-45 x 2, Gigabit
PS2	X 2, PS2 keyboard & PS2 mouse
Video-out	DVI-D x 1, VGA DB-15 x 1
Audio	Line-in, Line-out, Microphone-in (3.5 mm phone-jack)
Power input	DC-in x 1, 12V~28V
Control keys	<ul style="list-style-type: none"> • Front side, resistive touch type • Power on/off, Brightness, Audio volume, Backlight on/off, Touch on/off

Power

Power adaptor	External, 100 watts, 90~264V AC in, 12V DC out, medical grade, 1.2m DC cable
Power consumption	85 watts (typical, without any add-ons)


Mechanical & Environmental

Housing	<ul style="list-style-type: none"> • Front: Full flat design / Touch (standard) • Rear: Plastic + I/O cover w/ antibacterial treatment
IP rating	IP65 – front side (vertical direction usage)
Cooling	Variable speed smart fan design, < 30 dB (typical)
Mounting	VESA 75 x 75 / 100 x 100 mm
Kensington lock	Yes, x 1 at bottom
Dimension	440.5 x 369.8 x 83 mm (W x H x D, w/o stand)
Weight (net)	7.5 Kg (approximate, w/o power adaptor)
Temperature	<ul style="list-style-type: none"> • Operating – 0°C~40°C · Storage – -20°C~60°C
Humidity	Operating & storage – 10%~90%, non-condensing
Regulatory	<ul style="list-style-type: none"> • FCC-B, cUL, CE, VCCI • Medical 60601-1 3rd edition (EN 60601-1:2006, ANSI/AAMI ES60601-1:2005, CAN/CSA C22.2 No. 60601-1:08)

WMP-191

19" Core 2 Duo Front Full Flat Medical Panel PC

Outline Dimension

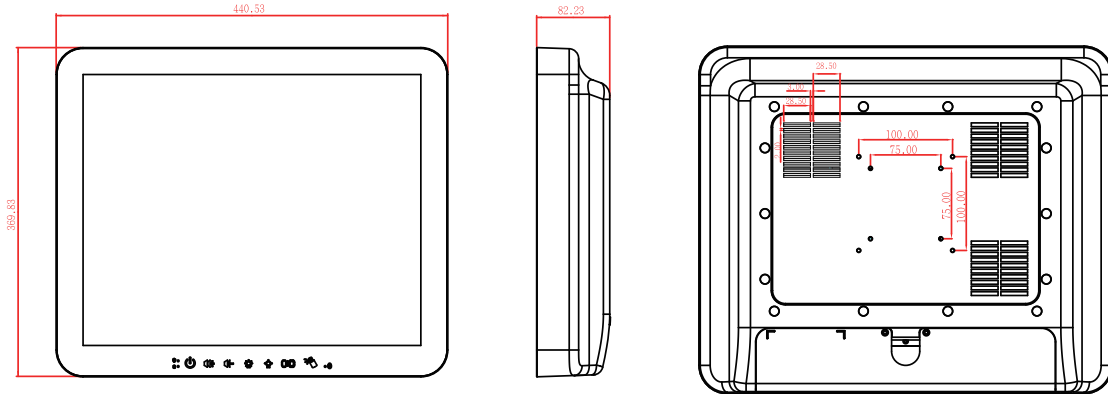


Packaging / Options / Customization

- Packaging** System, power adaptor, AC power cord, CD (drivers & manual)
- Options**
- WLAN – 802.11 a/b/g/n mini PCIe module w/ internal antenna x 2
 - Bluetooth 2.1 (USB)
 - Power adaptor w/ 2.4m or 3.6m DC cable
 - Anti-bacteria desktop stand (metal, white)
- Customization** Microphone on I/O cover (Configure of order service)



I/O Connectors

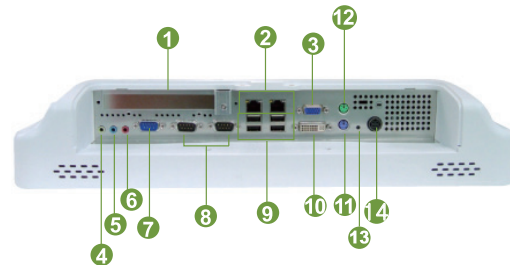

- | | |
|-----------------|----------------|
| ① PCI expansion | ⑧ RS232 x 2 |
| ② Giga LAN x 2 | ⑨ USB x 4 |
| ③ VGA | ⑩ DVI-D |
| ④ Line-out | ⑪ PS2 keyboard |
| ⑤ Line-in | ⑫ PS2 mouse |
| ⑥ Microphone-in | ⑬ Reset |
| ⑦ RS232/422/485 | ⑭ DC-in |

Ordering Information

- WMP-191-TR0B0; T7500 2.2G, DDR2 1G, SATA 160G



Web: www.wincomm.com.tw

Contact: sales_support@wincomm.com.tw

Wincomm Corporation

3F, NO. 14, Prosperity Road II, Science-Based Industrial Park,
Hsinchu, Taiwan 30078, R.O.C

Tel: +886 3 578 0000 Fax: +886 3 578 0295

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660