

îiyama

PROLITE T1932MSC-B5X





















19" Projective Capacitive 10pt touch monitor featuring IPS panel

The ProLite T1932MSC-B5X 19" multi-touch screen is based on projected capacitive technology which thanks to a glass overlay covering the screen guarantees high durability, scratch-resistance and perfect picture performance. The touch function remains unaffected even if the glass is scratched. A solid and steady base supports the touchscreen with an adjustable stand offering full 90 degree positioning angles. Menu Buttons are located on the side of the screen which can be locked to prevent tampering and includes a handy function to deactivate the touchscreen for cleaning. In addition, the edge-to-edge glass design creates an eye-catching finish with high light transmission guaranteeing perfect picture clarity and brilliant colours. Available in black and white.





IPS

IPS displays are best known for wide viewing angles and natural, highly accurate colours. They are especially suited for colour-critical applications.

Scratch resistance

Scratch resistance is essential for touch solutions used in public places and schools. This is achieved thanks to a glass overlay covering the screen. It guarantees high durability of the touch function and even more importantly the touch function remains unaffected even if the glass is scratched.

17.11.2022 10:38:58



01 DISPLAY CHARACTERISTICS

| Design | Edge to edge glass |
|-------------------------|---|
| Diagonal | 19", 48cm |
| Panel I | IPS LED |
| Native resolution | 1280 x 1024 (1.3 megapixel) |
| Aspect ratio 5 | 5:4 |
| Panel brightness | 250 cd/m² |
| Brightness | 225 cd/m² with touch |
| Light transmittance | 90% |
| Static contrast | 1000:1 with touch |
| Response time (GTG) | 14ms |
| Viewing zone | horizontal/vertical: 178°/178°, right/left: 89°/89°, up/down: 89°/89° |
| Colour support | 16.7mln |
| Horizontal Sync | 31 - 80kHz |
| Viewable area W x H | 374.8 x 300mm, 14.8 x 11.8" |
| Pixel pitch | 0.2928mm |
| Bezel colour and finish | black, matte |

02 TOUCH

| Touch technology | projective capacitive |
|-----------------------------|---|
| Touch points | 10 (HID, only with supported OS) |
| Touch method | stylus, finger, glove (latex) |
| Touch interface | USB |
| Supported operating systems | All iiyama monitors are Plug & Play and compatible with Windows and Linux. For details regarding the supported OS for the touch models, please refer to the driver instruction file available in the downloads section. |

03 INTERFACES / CONNECTORS / CONTROLS

| Analog signal input | VGA x1 |
|----------------------|---------------------------|
| Digital signal input | HDMI x1 DisplayPort x1 |
| Audio output | Speakers 2 x 1W |
| HDCP | yes |

04 FEATURES

| Water and dust protection | IP54 (front) |
|---------------------------|--------------|
| OSD key lock | yes |

05 GENERAL

| OSD languages | EN, DE, FR, ES, IT, CN, JP |
|-----------------|---|
| Control buttons | Menu, Scroll up/ Brightness, Scroll down/ Mute, Select, Power |
| User controls | contrast, brightness, power, OSD, auto adjust, H.position, V.position, H.size, Fine, OSD H.position, OSD V.position, OSD timeout, reset, input select, OSD language, colour temperature, volume, mute |
| Convenience | Kensington-lock™ prepared |
| Plug&Play | DDC2B |

17.11.2022 10:38:58



06 MECHANICAL

| Tilt angle | 90° up; 5° down |
|-------------------------|-----------------|
| VESA mounting | 100 x 100mm |
| Cable management system | ves |

07 ACCESSORIES INCLUDED

| Cables | power (1.8m), USB (1.8m), HDMI (1.8m), Audio (1.8m), DP (1.8m) |
|-------------|--|
| Guides | quick start guide, safety guide |
| Other | touch panel disk (CD-ROM) |
| Cable cover | yes |

08 POWER MANAGEMENT

| Power supply unit | internal |
|-------------------|---------------------------------------|
| Power supply | AC 100 - 240V, 50/60Hz |
| Power usage | 25W typical, 1W stand by, 1W off mode |


09 SUSTAINABILITY

| Regulations | CB, CE, EAC, RoHS support, ErP, WEEE, CU, cULus, REACH |
|--|--|
| Energy efficiency class (Regulation (EU) | E |
| 2017/1369) | |
| REACH SVHC | above 0.1%: Lead |

10 DIMENSIONS / WEIGHT

| Product dimensions W x H x D | 432 x 391 x 219mm |
|------------------------------|-------------------|
| Weight (without box) | 6.9kg |
| EAN code | 4948570116126 |



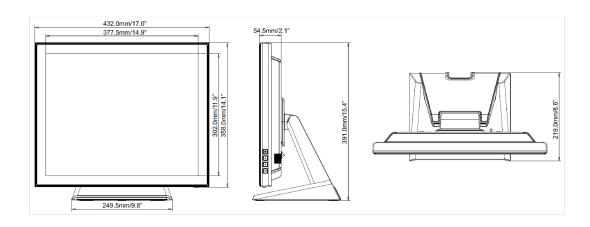

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660