

iiyama

PROLITE TW1023ASC-B1P











10.1" PCAP 10pt touch screen with Android and Power over Ethernet Technology

The ProLite TW1023ASC-B1P touch panel PC is a perfect choice for high-use environments such as retail, interactive POS, information desks or hospitality applications.

The Power over Ethernet technology (POE) allows to provide both data connection and power by a single cable, simplifying all installations. This monitor can operate in landscape, portrait or face-up orientation. Together with the built-in camera and speakers it offers limitless, interactive installation possibilities.



Connectivity

The RJ45 (LAN) connector supporting Power over Ethernet technology (POE) allows to provide both data connection and power by a single cable, which simplifies installation in areas where many cables would interfere with the environment.



Built-in webcam & speakers

Making the screen a perfect solution for semi or fully automated reception solutions allowing businesses to track and manage visitor traffic at the front desk lobby without compromising on the safety and security of your staff, visitors and company assets.

17.11.2022 09:12:01



01 DISPLAY CHARACTERISTICS

| Design | Edge to edge glass |
|-------------------------|---|
| Diagonal | 10.1", 25.5cm |
| Panel | IPS Panel Technology, LED |
| Native resolution | 1280 x 800 (1 megapixel HD) |
| Aspect ratio | 16:10 |
| Panel brightness | 450 cd/m ² |
| Brightness | 385 cd/m² with touch |
| Light transmittance | 85% |
| Static contrast | 1000:1 with touch |
| Response time (GTG) | 25ms |
| Viewing zone | horizontal/vertical: 160°/160°, right/left: 80°/80°, up/down: 80°/80° |
| Colour support | 16.7mln 8bit |
| Viewable area W x H | 216.6 x 135.4mm, 8.5 x 5.3" |
| Pixel pitch | 0.1692mm |
| Bezel colour and finish | black, matte |

02 TOUCH

| Touch technology | projective capacitive |
|------------------|--|
| Touch points | 10 |
| Touch method | finger, glove (latex), capacitive stylus |
| Touch interface | USB |

03 INTERFACES / CONNECTORS / CONTROLS

| Digital signal output | HDMI x1 (mini HDMI, 1280x720 @60Hz) |
|-----------------------|-------------------------------------|
| Audio output | Speakers 2 x 1.5W |
| USB ports | x2 (2.0, 1 x MICRO with OTG) |
| RJ45 (LAN) | x1 (PoE) |

04 FEATURES

| Integrated software | Android 8.1 without GMS |
|------------------------------|---|
| CPU | Rockchip RK3288, quad-core Cortex-A17 up to 1.8GHz |
| GPU | Quad-core cortex A17 |
| Storage | 16GB eMMC |
| Memory | 2GB DDR3 |
| WiFi | IEEE802.11b/g/n |
| Bluetooth | 4.0 |
| Extra | auto-rotation, webcam (2 megapixel), microphone, SD card slot, anti-fingerprint coating |
| Max. non-stop operating time | 24/7 |
| Glass thickness | 1.25mm |
| Glass hardness | 7H |



17.11.2022 09:12:01



Applications

install new application / manage application, lock application, calculator, calendar, camera, chrome, alarm / clock / timer / stopwatch, email, manage files and folders, manage images / video / audio, organize albums, manage power on/off time, play audio files, search engine, system preferences, sound recorder, play video files



Orientation landscape, portrait, face-up

VESA mounting 75 x 75mm

07

ACCESSORIES INCLUDED

| Guides | quick start guide, safety guide |
|-------------|---------------------------------|
| Other | AC adapter |
| Cable cover | yes |

08 POWER MANAGEMENT

| Power supply unit | external |
|-------------------|------------|
| Power supply | DC 12 V |
| Power usage | 7W typical |


09 SUSTAINABILITY

| Regulations | CE, RoHS support, ErP, WEEE, REACH |
|-------------|------------------------------------|
| REACH SVHC | above 0.1%: Lead |

10 DIMENSIONS / WEIGHT

| Product dimensions W x H x D | 255 x 172 x 30.5mm |
|------------------------------|--------------------|
| Box dimensions W x H x D | 398 x 223 x 68mm |
| Weight (without box) | 0.8kg |
| Weight (with box) | 1.36kg |
| EAN code | 4948570117116 |



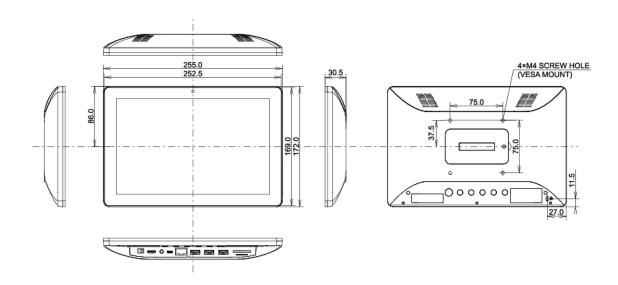

All trademarks and registered trademarks acknowledged. E & O E. Specification subject to change without notice. All LCD's comply with ISO-9241-307:2008 in connection with pixel defects.

© IIYAMA CORPORATION. ALL RIGHTS RESERVED



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28

Business Registration Number: 07699660