

APC-3794P/R

17" Intel® Celeron® Processor N2930 Full IP66/IP69K Stainless Steel Panel PC

Industrial Panel PC

HMI Controller

Industrial Display Monitor

Box PC



Features

- Low Power Consumption Panel PC
- Intel® Celeron® Processor N2930
- Onboard DDR3L 4GB 1333/1600MHz
- IP66/IP69K rated with M12 connector
- SUS304 Grade Stainless Steel Enclosure (SUS 316 Optional)
- Full Flat Bezel and Fanless Design
- Projective Capacitive Touch/Resistive Touch Window
- 9~36V DC Wide-ranging Power Input



Specifications

System

Processor	Intel® Celeron® Processor N2930
System Chipset	SoC
System Memory	Onboard DDR3L 4GB 1333/1600MHz

External I/O

USB	1 x M12 8-pin for 1 x USB 3.0
Serial/Parallel	1 x M12 8-pin for RS-232/422/485, COM1, Default RS-232 1 x M12 8-pin for RS-232, COM2
LAN	1 x M12 8-pin for GbE LAN
Power	1 x M12 3-pin DC Power
Optional I/O (either one)	1 x M12 8-pin for 2 x USB 2.0 (Default) 1 x Power Switch

Expansion

Expansion slot	1 x Mini PCIe full size For optional WLAN/BT Module and Antenna at rear side
----------------	---------------------------------------------------------------------------------

Storage Space

Storage	1 x 2.5" SATA HDD or SSD, Easily Accessible 1 x Internal SD Card Slot Onboard
---------	----------------------------------------------------------------------------------

LCD

Display Type	17" TFT-LCD
Max. Resolution	1280 x 1024
Max. Color	16.2M
Luminance (cd/m ²)	350
View Angle	H: 160/V: 140
Contrast	1000:1
Backlight Lifetime	50,000 Hrs

Touch Screen - Projected Capacitive Touch

Interface	USB
Light transmission (%)	90%

Touch Screen - Resistive Touch Window


Interface	USB
Light transmission (%)	80%

Power


Power input	9~36V DC
Power Consumption	MAX: 27W (APC-3794P) MAX: 25W (APC-3794R)

Dimensions

Standard

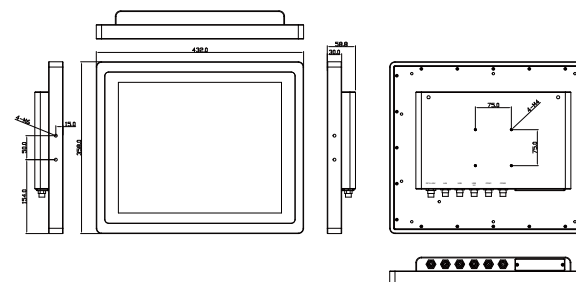

Optional I/O (either one)

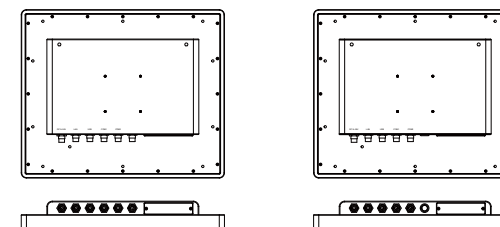

Mechanical

Construction	Stainless steel
IP Rating	Full IP66/IP69K Design
Mounting	Panel Mount/VESA Mount 75 x 75/Wall Mount
Dimension	432 x 358 x 58.8 mm
Net Weight	7.2 kg

Environmental

Operating temperature(°C)	0°C~50°C
	-20~60°C (with Industrial SSD)
Storage temperature(°C)	-30°C~70°C
Humidity	10 to 95% @ 40°C, non-condensing
Certification	CE/FCC class A

Operating System Support

Windows 7 Professional for Embedded Systems,
Windows 7 Ultimate for Embedded System,
Windows Embedded 8.1 Pro,
Windows Embedded 8.1 Industry pro
Windows 10 IoT ENT LTSB

Ordering information

APC-3794P-02	17" SXGA IP66/IP69K full flat bezel design stainless steel panel PC, Intel® Celeron® Processor N2930, DDR3L 4G on board, 2.5" SATA II 320GB Industrial HDD, with projective capacitive touch, 9~36V DC power input with Adaptor, stainless steel enclosure
APC-3794R-02	17" SXGA IP66/IP69K full flat bezel design stainless steel panel PC, Intel® Celeron® Processor N2930, DDR3L 4G on board, 2.5" SATA II 320GB Industrial HDD, with RES. Touch Window, 9~36V DC power input with Adaptor, stainless steel enclosure

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660