


Embedded Box PCs

COMPACT-SL Series

Industrial compact PC with Intel® Atom™ E38xx processor (formerly Bay Trail)

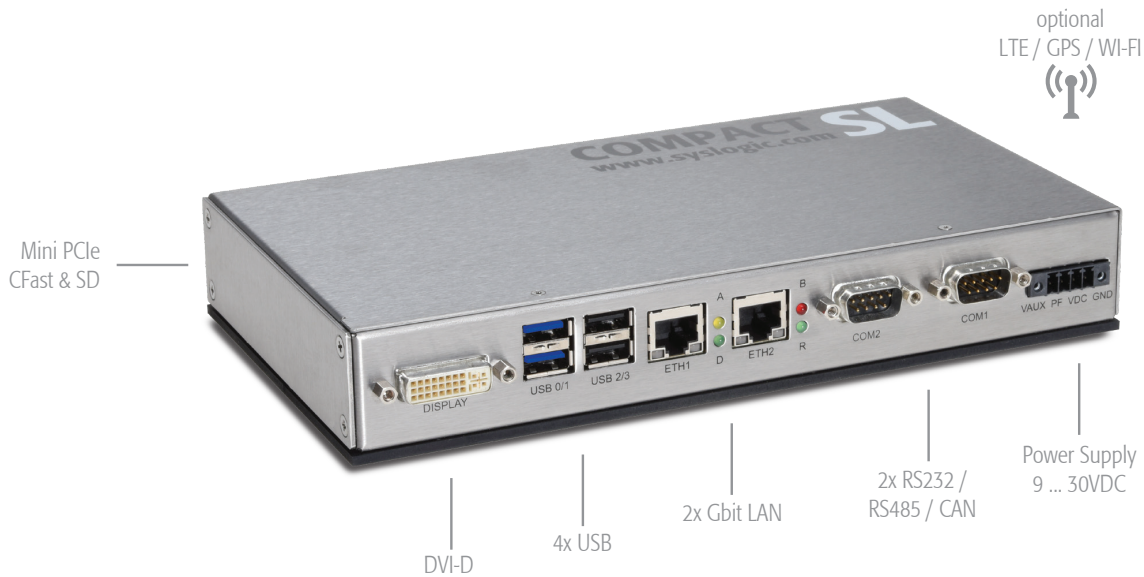

IPC/COMPACT8

This fan less COMPACT8-SL generation is based on the latest Intel® Atom™ E3800 (formerly Bay Trail) processor technology and offers a wide range of interface options. The robust and uncompromising industrial design allows the implementation in the most demanding applications and guarantees long term availability.

- Multi-core 64-bit Intel® Atom™ processor
- 24/7 continuous operation
- No moving parts
- Product lifecycle management
- Long term availability



Product Highlights

Hardware Watchdog
Temperature supervision
Real time clock
Persistent Flash BIOS
Optional goldcap backup
ESD- protection on all interfaces
No active cooling required
Fan less

Product Feature

Intel® Atom™ E3800 Series
up to 1.91GHz, up to 4 Cores
RAM soldered on board up to 8GB
Socket for CFast
DVI, Ethernet, USB3, RS232, Mini PCIe
optional RS422/485 and isolated CAN
Stainless steel housing

Markets / Applications

Industrial Automation
Automated Guided Vehicle (AGV)
Traffic control
Medical
Transportation and vehicle construction
Railway
Cleantech

	Order Code	IPC/SL8H19-A101E	IPC/SL8H19-A103E	IPC/SL8H19-A121E	IPC/SL8H19-A123E	MySyslogic ¹
Processor / Performance						
Intel Atom E3825 1.33GHz 64-bit		optional				•
Intel Atom E3845 1.91GHz 64-bit		•	•	•	•	optional
Memory						
L2 cache		2MB	2MB	2MB	2MB	1MB
DDR3 RAM		4GB	4GB	4GB	4GB	4GB
2GB / 8GB DDR3 RAM ¹		optional	optional	optional	optional	optional
Features						
Real time clock PC compatible		•	•	•	•	•
Hardware Watchdog & Temperature supervisor		•	•	•	•	•
Intelligent power management (Ignition controller)		•	•	•	•	•
Goldcap backup		optional	optional	optional	optional	optional
TPM2.0 (SLB9665)		optional	optional	optional	optional	optional
Communication Interfaces						
DVI-D up to 1920x1200 (WUXGA)		•	•	•	•	•
SD Card socket		1	1	micro SD socket	micro SD socket	1
CFast socket		1	1	1	1	1
SATA 2.0 standard interface ²		optional	optional	optional	optional	optional
USB version 2.0 (Type A)		3	3	3	3	up to 5
USB version 2.0 ²		2		2	2	
USB version 3.0 (Type A)		1	1	1	1	1
Ethernet 10/100/1000 Mbit (I210-IT)		2	2	2	2	up to 3
RS232 ESD protected (DSUB9)		2	2	1	1	up to 6
RS232 ESD protected ²		2		1		
RS422/485 ESD protected (DSUB9)					1	up to 2
CAN version 2.0b, SJA1000, ESD protected, isolated (DSUB9)				1		up to 2
Mini PCIe socket ²		1	1	1	1	up to 4
I2C bus ²		1		1	1	1
PC/104 bus ²		1		1	1	1
HD Audio / Speaker ²		1		1	1	1
Parallel Port ¹		optional	optional	optional	optional	optional
Technical Data						
Dimensions w227.6 x h36.5 x d127 mm (housing)		•	•	•	•	•
Net weight [gram]		1400	1400	1400	1400	1400
Input voltage 9... 30VDC non-isolated		•	•	•	•	•
Input voltage 19 ... 30VDC isolated ¹		optional	optional	optional	optional	optional
Current consumption typ. [mA] @ 24V without Add-Ins		300	300	300	300	
Power consumption typ. [Watt] @ 24V without Add-Ins		7.2	7.2	7.2	7.2	
Environmental Conditions						
Operating temperature (up to 85°C for 10 min.) ³		-40°C ... +70°C	-40°C ... +70°C	-40°C ... +70°C	-40°C ... +70°C	-40°C ... +70°C
Storage temperature -40 ... +85° C		•	•	•	•	•
Protection standard: IP30		•	•	•	•	•
Shock: designed to meet EN60068-2-27		•	•	•	•	•
Vibration: designed to meet EN60068-2-6		•	•	•	•	•
EMC according to EN-55022/55024/61000-6-2/61000-6-4		•	•	•	•	•
Safety according to IEC 60950-1		•	•	•	•	•
MTBF ~ 200 000h (22.8 Years) <small>excluding battery</small>		•	•	•	•	•
Optional enhancement cards						
Cellular Module with dual SIM (GSM/UMTS/LTE) <small>u-blox MPCL-L210 Module (TOBY-L210) - M2M only!</small>		optional	optional	optional	optional	optional
Positioning Wireless Module (GPS) <small>u-blox NEO-M8U Module incl. acceleration sensor</small>		optional	optional	optional	optional	optional
Wireless LAN a/b/g/n (WLAN)		optional	optional	optional	optional	optional
Digital and Analog I/O ¹		optional	optional	optional	optional	optional

¹Please contact factory for minimum order quantities

²Internal connector

³ Depending on installation situation and interface connection. Please see user documentation.

Product specifications subject to change without notice. | All data is for information purposes only and not guaranteed for legal purposes. Information in this data sheet has been carefully checked and is believed to be accurate. However, no responsibility is assumed for inaccuracies. Please refer to the user documentation for additional product specification.

© 2017 Syslogic Datentechnik AG
All rights reserved

Syslogic Datentechnik AG
Täferstrasse 28
CH-5405 Baden Dättwil

Version 1.4 | October 2017

For further information and support:
info@syslogic.com
support@syslogic.com
www.syslogic.com

+41 56 200 90 40 Switzerland (Headquarters)
+49 7741 967 14 20 Germany and Austria



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660