



IPPD-1968-2662-SPN0

19" Front IP65 P-CAP Industrial Monitor




Key Features

- 19" LCD, 1280 x 1024 pixel
- 10 points P-CAP touch screen
- Front IP 65 / (Full IP65 optional)
- Wide Temperature(-30°C ~ 85°C)
- True Flat & Narrow Bezel

| | |
|-------------------------|--|
| System color | Black |
| Mechanical | Front Side: Aluminum / Back Side: Heavy-duty steel |
| IPPD-1968 | |
| Display | |
| Display type | 19" TFT LCD |
| Display area (mm) | 376.3(H) x 301.1(V) mm |
| Aspect ratio | 5 : 4 |
| Resolution | 1280 x 1024 pixel |
| Luminance/Brightness | 1600 cd/m ² |
| Color | 16.7M |
| Color saturation (NTSC) | 80% |
| Pixel pitch (H/V) | 0.294mm x 0.294mm |
| Contrast ratio | 1000 : 1 (typ.) |
| Response time (Typical) | 10ms |
| Viewing angle (H/V) | 170°/160° (typ.) |
| Backlight MTBF | 70,000 hrs (typ.) |
| Touch screen type | P-CAP 10 points touch screen (RS232) |
| LCD Power consumption | 43W |
| Environment | |
| IP level | Front IP65 |
| Operating temperature | -30°C ~ 85°C |
| Storage temperature | -30°C ~ 85°C |
| Relative humidity | 0% ~ 90% (non-condensing) |
| Dimensions(w/o BOX PC) | 439.56mm(W) x 37.5mm(D) x 364.3mm(H) |
| Weight(w/o BOX PC) | 7 kg |

Dimensions

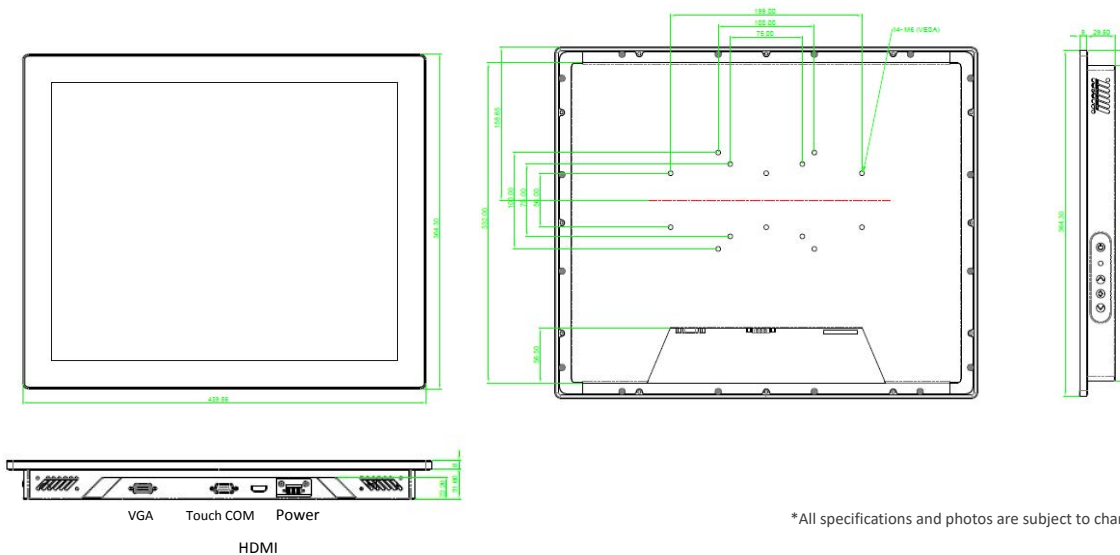

*All specifications and photos are subject to change without prior notice

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660