

LNP-2804GN-SFP-T

28-Port 1U 19" Rackmount Industrial Gigabit PoE+ Managed Ethernet Switch, with 24*10/100/1000Tx (PSE: 30W/Port) and 4* Gigabit Combo Ports (4*10/100/1000Tx RJ45, 4*100/1000 SFP Slots); EOT: -40°C to 75°C




Features

- ▶ Supports 24*10/100/1000Tx IEEE 802.3 af/at PoE+ Gigabit Ports (PSE: 30W/Port) + 4*Gigabit Copper/SFP Combo Ports (4*10/100/1000Tx RJ45 + 4*100/1000 SFP Slots)
- ▶ SFP Socket for Easy and Flexible Fiber Expansion
- ▶ Management: SNMP v1/v2c/v3, WEB, Telnet, Standard MIB
- ▶ NAT/Routing: Source NAT, Destination NAT, Static Routing
- ▶ Security: 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), HTTPS, SSH and SNMPv3
- ▶ Redundancy: ERPS, Proprietary Ring (Ultra-High-Speed Recovery Time < 20 ms), RSTP/STP (802.1w/1D), MSTP
- ▶ 48VDC Power Input (46-57 VDC for PoE af, 53-57 VDC is Recommended for PoE at) & 2 Relay Outputs
- ▶ Extended Operating Temperature: -40°C ~75°C
- ▶ Power Polarity Reverse Protection
- ▶ Overload Current Protection
- ▶ 1U Rackmount Design
- ▶ IP30 Protection
- ▶ 5-Year Warranty

INTRODUCTION

Antaira Technologies' LNP-2804GN-SFP-T is an industrial-class Layer 3 full managed switch with 24 Gigabit ports and four Gigabit combo ports. It is designed for rack-mount installation, and can be deployed in demanding outdoor environments. It is suitable for edge to core industrial networks. It integrates layer 3 switching software, which is optimized for scale and performance, delivering wire speed across all ports up to 56 Gbps for Layer 3 traffic forwarding and routing. In addition, the PoE design provides up to 30 watts per port to fulfill high power consumption devices. Moreover, it supports high reliability with -40°C ~ 75°C operating temperatures, and has a dual 48VDC input power design to ensure vital network capabilities with minimal downtime.

DIMENSIONS

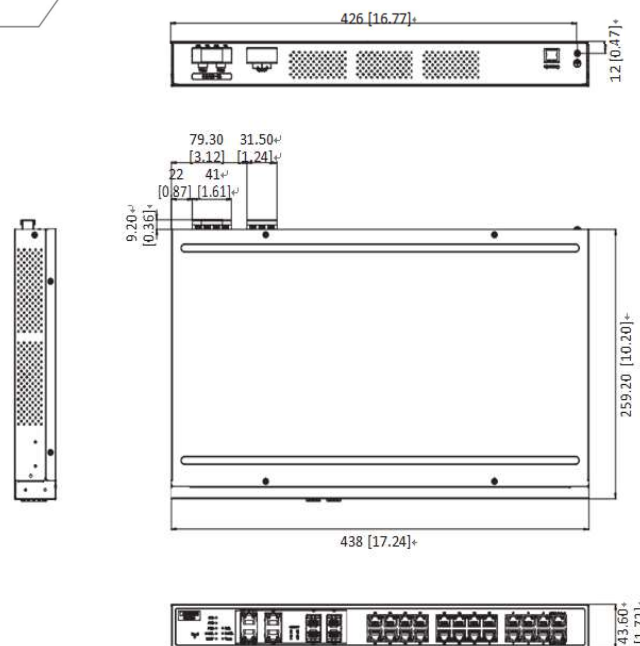

SPECIFICATIONS

Technology		Power Requirements	
Standards	IEEE 802.3 10Base-T Ethernet	Input Voltage	46 to 57VDC, Redundant Inputs
	IEEE 802.3u 100Base-TX Fast Ethernet	Power Connection	4-Pin Terminal Block
	IEEE 802.3ab 1000Base-T Gigabit Ethernet	Power Consumption	20 Watts for System
	IEEE 802.3u 100Base-FX Fast Fiber	Max. PoE Power Budget	685 Watts
	IEEE 802.3z 1000Base-X Gigabit Fiber	Mechanical Characteristics	
IEEE 802.3af/at Power over Ethernet	Housing		Metal, IP30 Protection
Processing Type		Dimensions	
Store and Forward		438 x 43.6 x 259.2 mm (W x H x D)	
Protocol		Weight	
Web browser, Telnet, Serial Console, TFTP, SNMPv1/v2c/v3, Port Speed/Duplex Configuration, IPv6, IEEE 802.1Q, GVRP, Port-based VLAN, G.8032 ERPS, Proprietary Ring, 802.1w/D RSTP/STP, IP Access Security, Port Security, DHCP Client, Port and IP Binding, 802.1X Port Access Control		Unit 8.37lbs.	
Flow Control		Mounting	
IGMP Snooping/Query for Multicast Group Management, Port Trunking, Static/802.3ad, LACP Rate Limit and Storm Control, IEEE 802.1p QoS CoS/TOS/ DSCP Priority Queuing, IEEE 802.3x Flow Control		1U 19" Rackmount	
Switch Properties		Environmental Limits	
Memory Buffer	4.1Mbits	Operating Temperature	EOT: -40°C to 75°C
Jumbo Frame	9,216bytes	Storage Temperature	-40°C to 85°C
MAC Table Size	8k	Ambient Relative Humidity	10% to 95%, (Non-condensing)
Interface		Regulatory Approvals	
Ethernet Port	24*RJ45 Port w/10/100/1000TX with PoE+, Auto Negotiation Speed, Full/Half Duplex Mode, and Auto MDI/MDI-X Connection	EMI	CE FCC EN55022 Class A
RJ45/Fiber Combo Port	4*100/1000 SFP Slots	EMS	IEC61000-4-2 (ESD), IEC61000-4-3 (RS), IEC61000-4-4 (EFT), IEC61000-4-5 (Surge), IEC61000-4-6 (CS), IEC61000-4-8 (Magnetic Field)
Fiber Wavelength	Depends on SFP Modules	Free Fall	IEC60068-2-32
LED Indicators	10/100T (X): Link/Activity, Duplex/Collision Gigabit Copper: Link/Activity, Speed (1000 Mbps) SFP: Link/Activity	Shock	IEC60068-2-27
Console	RS-232 (RJ45)	Vibration	IEC60068-2-6
		Green	RoHS Compliant
		Certifications	FCC, CE
		Safety	UL 61010-1, UL 61010-2-201
		Compliance	EN50121-4
		Warranty	5 Years

ORDERING INFO

LNP-2804GN-SFP-T 28-Port 1U 19" Rackmount Industrial Gigabit PoE+ Managed Ethernet Switch, with 24*10/100/1000Tx (PSE: 30W/Port) and 4* Gigabit Combo Ports (4*10/100/1000Tx RJ45, 4*100/1000 SFP Slots); EOT: -40°C to 75°C

Optional Accessories	
SFP-100M-T	100 Mbps Fiber SFP Transceiver, Multi-Mode 2km / LC/ 1310nm, -40°C to 85°C
SFP-M-T	1 Gigabit Fiber SFP Transceiver, Multi-Mode 550m / LC/ 850nm, -40°C to 85°C
SFP-100S20-T	100 Mbps Fiber SFP Transceiver, Single-Mode 20km / LC/ 1310nm, -40°C to 85°C
SFP-S10-T	1 Gigabit Fiber SFP Transceiver, Single-Mode 10km / LC/ 1310nm, -40°C to 85°C

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660