

AIEdge-X[®] Series

AIEdge-X[®] powered by Coral Intelligence



Product Overview

NEXCOM AIEdge- X^{\oplus} series is designed to acquire data from device in the field side, and analyze and respond in a timely matter while all on the "Edge". The PC equipped with Coral Intelligence could also be trained and operate ML/DL without connecting to the cloud or internet, however it also is able o tap the Google Cloud IoT Edge software stack for data management and processing.

These compact fan-less embedded player can handle powerful multimedia content. In addition, the product line manages in-store traffic analytics, simultaneously engaging "calls to action" with virtual interactions in order to increase product interest and dwell time. It is suitable for Public Services and Kiosks, Education Aids, Warehousing management and Proactive maintenance.


Specifications

Model	AlEdge-X [®] 100	AIEdge-X [®] 537
CPU	Intel® Apollo Lake N4200 processor (2.50GHz,6W)	7th Gen Intel® Core™ socket type Processor up to 35W
Chipset	Intel® HD Graphics 505	Intel® PCH Q170
Memory	1 x 204-pin SO-DIMM socket, support up to DDR3L 1866MHz, non-ECC, un-buffred memory up to 8GB	2 x 260-pin SO-DIMM sockets, supports DDR4 1866/2133 MHz, non-ECC, un-buffred memory up to 32G (single socket max. 16GB)
Storage	1 x M.2 M key 2242 SSD	1 x SATA 2.5" HDD/ SSD
Display	2 x HDMI 2.0, resolution 4096 x 2160 60Hz	1 x HDMI 2.0 1 x HDMI 1.4 1 x DisplayPort
I/O	I/O Interface-Front - 1 x COM port (RS232/RS422/RS48) - 1 x DC-in Jack with lock - 2 x USB 3.0	I/O Interface-front - 2 x USB3.0 - 2 x COM Port - 1 x 4-pin mini-Din with Lock
	I/O Interface-rear - 2 x Antenna hole	I/O Interface-rear - 2 x USB 3.0 - 3 x Antenna hole - 1 x MIC-in - 1 x Line-out
Expansion	1 x mini-PCIe full-size connector, support Wi-Fi 1 x Internal USB connector	1 x mini-PCIe slot (full size)
	1 x LVDS Dual channel connector 1 x LCD backlight power in connector	1 x NGFF (M.2) 2230 for optional WLAN
SIM Card Holder	1	1
LAN Ports	2 x RJ45 with LEDs for Gigabit LAN	2 x RJ45 with LEDs for Gigabit LAN
Power Input Range	Input: 100VAC to 240VAC	Input: 100VAC to 240VAC
Operating System	Win10 64-bit	Win10/Linux
System Dimension (LxWxH)(mm)	152 x 108 x 375	295 x 189. x 33
Certification	CE (EMC EN55032 +EN55024)	CE Approval
	FCC Class A (EMI part 15B)	FCC Class B

AIEdge-X[®] Series

NE(COM



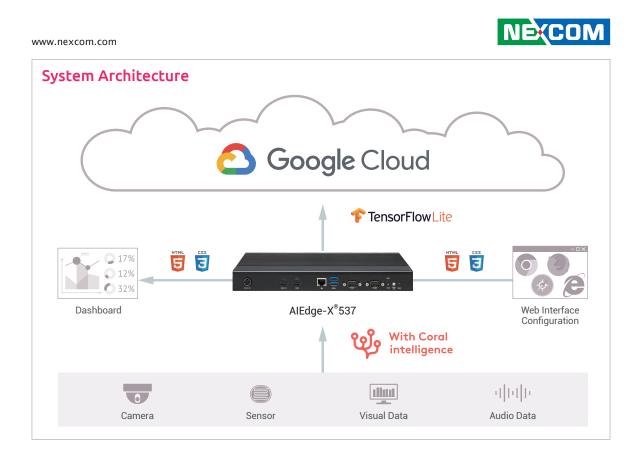

AIEdge-X[®] Features

Web Configuration

- IoT Studio
 - Rapid prototyping/engineering tool
- With IoT-Studio, user can easy to configure Remote Access
 - Access and management NISE50-GCP anywhere via
 - browser - Support popular browser based on HTML5 & CSS3



3

Øe

Dashboard Support

- Dashboard
 - Quickly create a dynamic data dashboard - Provide variety of widgets for user to directly use via simple configuration



Cloud Connectivity Available

- Google Cloud IoT Core and Cloud IoT Edge - Service of reliable and secure bidirectional communications between IoT devices and cloud
- Coral From Google Edge TPU processor for AI applications
 - Through PCI-e accelerator

NE(COM

We reserve the right to change specifications and product descriptions at any time without prior notice.

AIEdge-X[®] Series Last update: 01/21/2020



Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508 Support: +1 347 719 4508

1309 Coffeen Ave Ste 1200 Sheridan WY 82801 USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050 Support: +44 (0)1785 879 050

Unit A5 Douglas Park Stone Business Park Stone ST15 0YJ United Kingdom

VAT Number: 120 9546 28 Business Registration Number: 07699660