

SF101-ADS

14th/13th/12th Gen Intel® Core®
Desktop Box IPC



KEY FEATURES



Compact Size

Compact Size & Powerful Performance



Increased CPU Performance

Supports 14th/13th/12th Generation Intel® Core™ Processors



Create RAID or NVME

Configurable with dual M.2 Gen4 NVME Storage with RAID 0/1



Stable & Reliable System Operation

Choice of 1.3" Touch LCD, OOB, Power Redundancy Decoupling



Easy Integration


Supports Wallmount or Rackmount Installation



PANEL




Front View

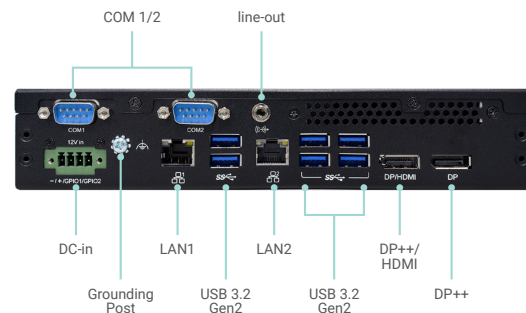


Rear View

DIMENSIONS




Rear View

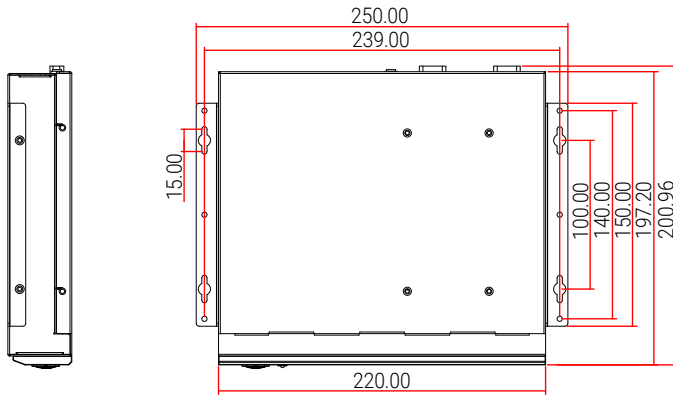


Top View

Left View

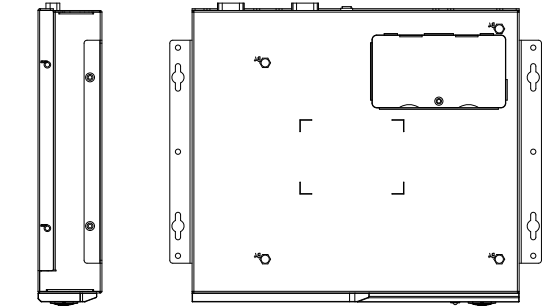

Bottom View

Right View



Front View

SPECIFICATION

SYSTEM	Processor	<p>14th Generation Intel® LGA 1700 Socket Processors, TDP support up to 35W Intel® Core™ i9-14900T (24 Cores, 36M Cache, up to 5.5 GHz); 35W Intel® Core™ i7-14700T (20 Cores, 33M Cache, up to 5.2 GHz); 35W Intel® Core™ i5-14500T (14 Cores, 24M Cache, up to 4.8 GHz); 35W Intel® Core™ i5-14400T (10 Cores, 20M Cache, up to 4.5 GHz); 35W Intel® Core™ i3-14100T (4 Cores, 12M Cache, up to 4.4 GHz); 35W</p> <p>13th Generation Intel® LGA 1700 Socket Processors, TDP support up to 35W Intel® Core™ i9-13900TE (24 Cores, 36M Cache, up to 5.0 GHz); 35W Intel® Core™ i7-13700TE (16 Cores, 30M Cache, up to 4.8 GHz); 35W Intel® Core™ i7-13700T (16 Cores, 30M Cache, up to 4.9 GHz); 35W Intel® Core™ i5-13500TE (14 Cores, 24M Cache, up to 4.5 GHz); 35W Intel® Core™ i5-13500T (14 Cores, 24M Cache, up to 4.6 GHz); 35W Intel® Core™ i3-13100TE (4 Cores, 12M Cache, up to 4.1 GHz); 35W Intel® Core™ i3-13100T (4 Cores, 12M Cache, up to 4.2 GHz); 35W</p> <p>12th Generation Intel® LGA 1700 Socket Processors, TDP support up to 35W Intel® Core™ i9-12900TE (16 Cores, 30M Cache, up to 4.8 GHz); 35W Intel® Core™ i7-12700TE (12 Cores, 25M Cache, up to 4.6 GHz); 35W Intel® Core™ i5-12500TE (6 Cores, 18M Cache, up to 4.3 GHz); 35W Intel® Core™ i3-12100TE (4 Cores, 12M Cache, up to 4.0 GHz); 35W Intel® Pentium® G7400TE (2 Cores, 6M Cache, 3.0 GHz); 35W Intel® Celeron® G6900TE (2 Cores, 4M Cache, 2.4 GHz); 35W</p>
	Chipset	Intel® R680E/Q670E/H610E Chipset
	Memory	Two 260-pin SODIMM up to 64GB Dual Channel DDR4 3200 MHz R680E ECC Support
	BIOS	AMI SPI 128Mbit
	GRAPHICS	Controller
	Feature	OpenGL 4.5, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1/WMV9, JPEG/MJPEG, HEVC/H265, VP8, VP9 HW Encode: MPEG2, AVC/H264, JPEG, HEVC/H265, VP8, VP9
	Display	1 x DP++ 1 x DP++/HDMI 1 x 1.3" Front Capacitive Touch LCD (opt.)
STORAGE	External / Internal	1 x 2.5" SATA bay (R680E) 1 x M.2 2280 M Key (PCIe Gen4 x4/SATA) RAID 0/1
EXPANSION	Interface	1 x PCIe x16 (Gen 5) (Max. 75W) 1 x M.2 2230 E Key (USB/PCIe x1)
		(R680E) 1 x M.2 2280 M Key (PCIe Gen4 x4/SATA) 1 x M.2 2242/3042/3052 B Key (PCIe Gen3 x1/SATA/USB 3.2 Gen2/USB 2.0)
AUDIO	Audio Codec	Realtek ALC888S-VD2-GR
ETHERNET	Controller	1 x Intel® I226V PCIe(10/100/1000/2.5G speeds) (R680E) 1 x Intel® I219LM PHY(10/100/1000 speeds) (support vPro/AMT) 1 x Intel® I210AT PCIe(10/100/1000 speeds)(Opt.)
LED	Indicators	1 x Power LED 1 x HDD LED
FRONT I/O	USB	2 x USB 2.0
	Button	1 x Power Button
REAR I/O	Ethernet	1 x 2.5GbE (RJ-45) 1 x GbE (RJ-45) (2x by Opt.)
	Serial	2 x COM
	USB	(R680E) 4 x USB 3.2 Gen2 (Opt.: up to 6 x USB 3.2 Gen2)
	Display	1 x DP++ 1 x DP++/HDMI
	Audio	1 x line-out
	Grounding	1 x Grounding Post
	WATCHDOG TIMER	Output & Interval
SECURITY	TPM	dTPM2.0
POWER	Type	Single 12V +/-10% DC
	RTC Battery	CR2032 Coin Cell
	Connector	Terminal Block
	Consumption	TBD
OS SUPPORT	Microsoft	Windows 10 IoT
	Linux	Linux
ENVIRONMENT	Temperature	Operating: -5°C ~ 45°C Storage: -40°C ~ 85°C
	Humidity	Operating: 5% ~ 90% RH Storage: 5% ~ 90% RH
	MTBF	TBD

SPECIFICATION

MECHANICAL	Construction	Metal chassis + Aluminum front bezel
	Mounting	Wall mount Rackmount
	Dimensions (W x H x D)	220 x 43 x 197.2mm
	Weight	2.55kg
STANDARDS AND CERTIFICATIONS	Shock	Operating: 3G Non-operating: 5G
	Vibration	Operating: Random 5~500Hz 1G Non-operating: Sweep Sine 10~500Hz 1.5G
	Package Drop	ISTA Project 1A
	Certifications	CE, FCC class A, RoHS, UKCA

OPTIONAL ITEMS

Optional Items	Part Number	Description
Display	TBD	1 x 1.3" Front touchable and programable display showing Local System Information
Storage	TBD	1 x 2nd M.2 2280 NVME SSD (via additional PCIe riser card)
Power Redundancy Module	TBD	RED01 Power Redundancy Module, decouple two power supplies
OOB Management	TBD	EXT-OOB for remote management
Mounting Kit	TBD	Wallmount Brackets
	TBD	2in1 Rackmount Brackets & cabinet screw kits.

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660