




4X4-5800U/ 4X4-5700U/ 4X4-5600U/ 4X4-5400U/ 4X4-5300U  
4X4 Motherboard

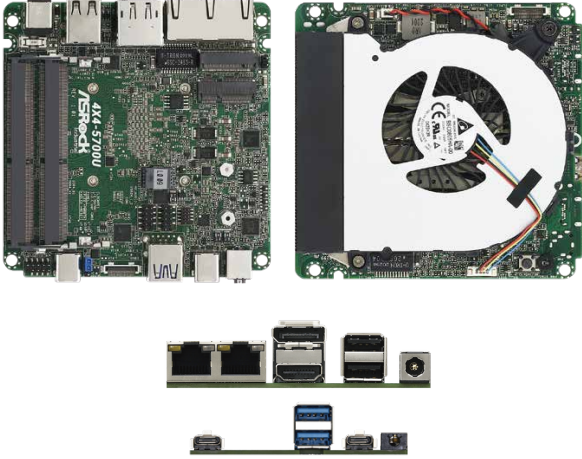

KEY FEATURES

- AMD Ryzen™ 7 5800U/ 5700U/ Ryzen™ 5 5600U/ Ryzen™ 3 5400U/ Ryzen™ 3 5300U
- 2 x 260-pin SO-DIMM up to 64GB DDR4 3200 MHz
- 4 x USB 3.2 Gen2, 4 x USB 2.0, 1 x M.2 Key M, 1 x M.2 Key E,
- 1 x COM, 1 x SATA3
- 1 x Realtek 1 Gigabit LAN (support DASH), 1 x Realtek 2.5 Gigabit LAN
- Supports Quad display, 1 x HDMI 2.0, 3 x DP 1.2a (2 from Type C)
- TPM 2.0 onboard IC
- 12V~19V DC-In

SPECIFICATIONS

**Form Factor**

Dimensions	4X4 (4.09-in x 4.02-in)
------------	-------------------------

**Processor System**

CPU	AMD Ryzen™ 7 5800U (Max Speed up to 4.4GHz) AMD Ryzen™ 7 5700U (Max Speed up to 4.3GHz) AMD Ryzen™ 5 5600U (Max Speed up to 4.2GHz) AMD Ryzen™ 3 5400U (Max Speed up to 4.0GHz) AMD Ryzen™ 3 5300U (Max Speed up to 3.8GHz)
Chipset	SoC
BIOS	AMI SPI 128 Mbit

**Memory**

Technology	Dual Channel DDR4 3200 MHz
Capacity	64GB (32 GB per DIMM)
Socket	2 x 260-pin SO-DIMM

**Graphics**

Controller	AMD Radeon™ Graphics
HDMI	HDMI 2.0a Max resolution up to 4096x2160@60Hz
DisplayPort	DisplayPort 1.2a, DP++ Max resolution up to 4096x2160@60Hz
MultiDisplay	Max 4 display (Included 2 outputs from type C)

**Expansion Slot**

M.2	1 x M.2 (Key E, 2230) with PCIe x1, USB 2.0 for Wireless
-----	--

**Audio**

Interface	Realtek ALC233, High Definition Audio.
-----------	--

**Ethernet**

Controller/ Speed	LAN1: Realtek RTL8125BG with 10/100/1000/2500 Mbps LAN2: Realtek R8111EPV (DASH) with 10/100/1000 Mbps
Connector	2 x RJ-45

**Front I/O**

USB	2 x USB 3.2 Gen2 (Type A) 2 x USB 3.2 Gen2 (Type C) (Supports DP1.2a display output)
Audio	1 (headphone & microphone jack)

**Rear I/O**

HDMI	1 x HDMI 2.0a
DisplayPort	1 x DP1.2a
Ethernet	1 x 1 Gigabit LAN, 1 x 2.5 Gigabit LAN
USB	2 x USB 2.0
DC Jack	1

**Internal Connector**

USB	2 x USB2.0 (1 x 2.00mm pitch header)
COM	1 x COM(RS-232/422/485)
TPM	TPM 2.0 onboard IC

**Storage**

M.2	1 x M.2 (KEY M, 2242/2260/2280) with PCIe x4 and SATA3 for SSD *M.2 Key M 2280(Supported by bracket)
SATA	1 x SATA3.0 (6.0 Gb/s)

**Watchdog Timer**

Output	From Super I/O to drag RESETCON#
Interval	256 Segments, 0, 1, 2, ...255sec

**Power Requirements**

Input PWR	12V~19V DC-In Jack
Power On	AT/ATX Supported - AT : Directly PWR on as power input ready - ATX : Press button to PWR on after power input ready

**Environment**

Operating Temp	0°C ~ 60°C
Storage Temp	-40° C ~ 85° C
Operating Humidity	5% ~ 90%
Storage Humidity	5% ~ 90%

## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660