

EHL556


Atom




Intel® Atom® Processor X Series
3.5" SBC



Products with VGA

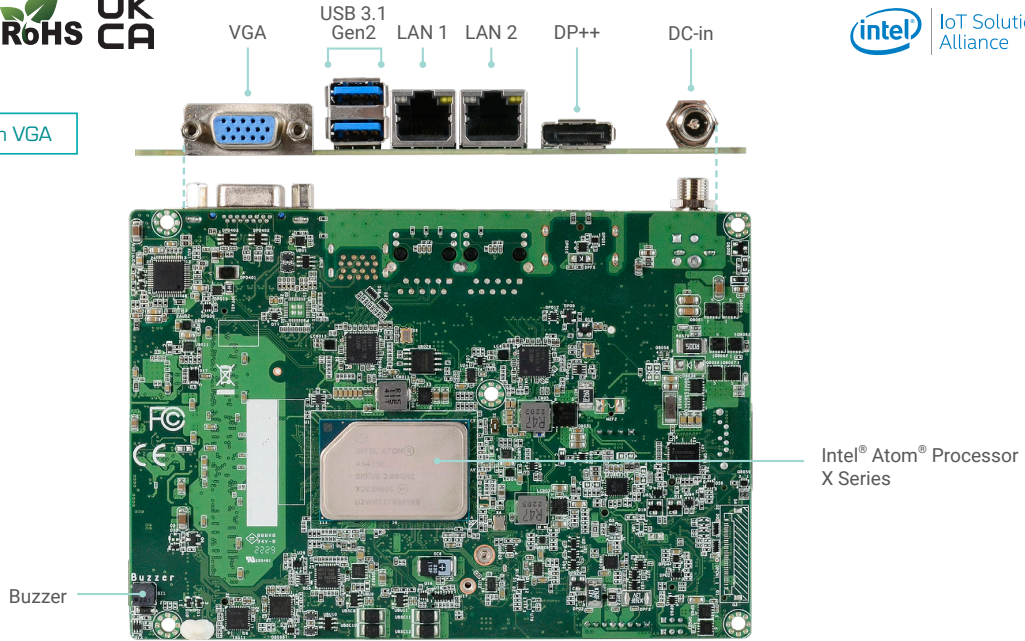

Bottom View

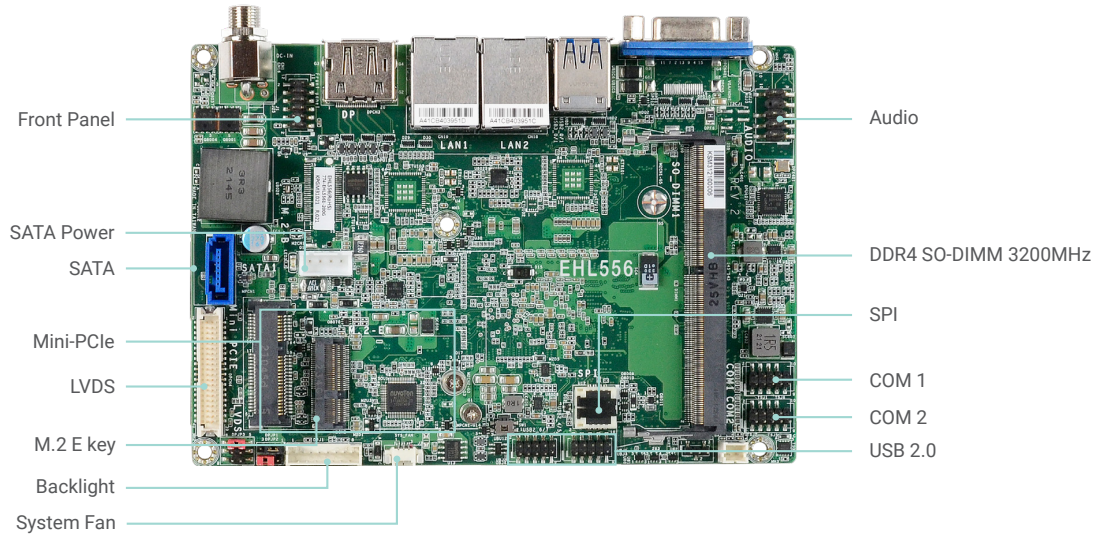

Top View

KEY FEATURES



DDR4

1 DDR4-3200 SODIMM
up to 32GB



4K High Resolution

Supports 4K/ 2K resolution



3 Independent Displays

1 VGA + 1 DP++ +
1 LVDS/eDP



Multiple Expansion


1 M.2 E Key,
1 Mini-PCIe, I2C




Rich I/O

2 GbE, 2 USB 3.1 Gen2,
2 USB 2.0, 2 COM,
1 SATA 3.0

BLOCK DIAGRAM

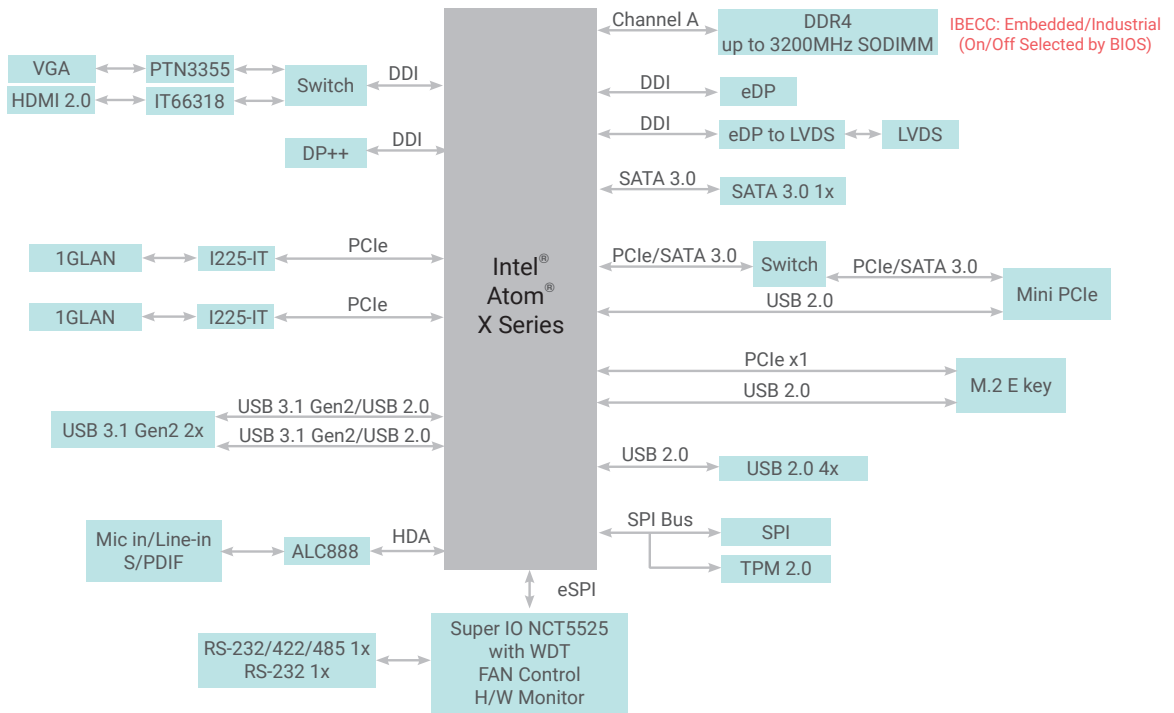

MECHANICAL DRAWING

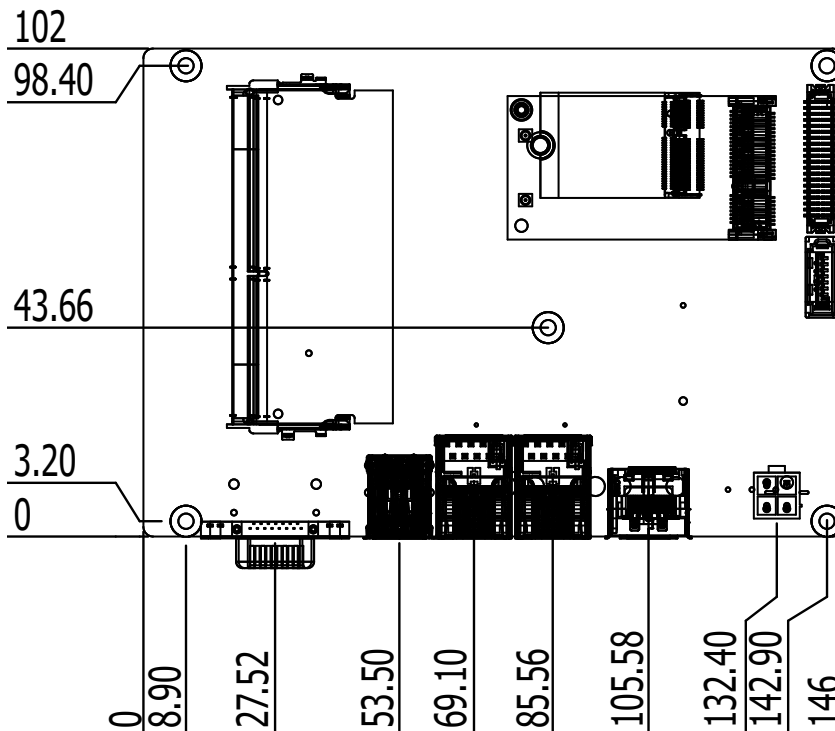

SPECIFICATION

SYSTEM	Processor	Intel Atom Elkhart Lake Industrial Atom, x6425RE, 4C, 1.9GHz,12W Atom, x6414RE, 4C, 1.5GHz,9W Embedded Atom, x6425E, 4C, 2.0GHz(3.0GHz),12W Atom, x6413E, 4C, 1.5GHz(3.0GHz),9W PC Client Celeron N6210, 2C 1.2GHz(2.6GHz), 6.5W	
	Memory	Single DDR4-3200 SODIMM Up to 32GB (in-band ECC support in embedded/industrial SKU)	
	BIOS	AMI SPI 256Mbit	
	GRAPHICS	Controller	Intel® HD Graphics
GRAPHICS	Feature	OpenGL 5.0, DirectX 12, OpenCL 2.1 HW Decode: AVC/H.264, MPEG2, VC1, WMV9, JPEG/MJPEG, HEVC/H.265, VP8, VP9, MVC HW Encode: AVC/H.264, JPEG/MJPEG, HEVC/H.265, VP8, VP9, MVC	
	Display	1 x VGA (or BOM option change to HDMI 2.0)	HDMI: resolution up to 1920x1080 @60Hz
		1 x DP++	DP++: resolution up to 4096x2304 @60Hz
		1 x LVDS or eDP + Backlight	LVDS: resolution up to 1920x1200 @60Hz
Triple Display	VGA + DP++ + LVDS/eDP		
EXPANSION	Interface	1 x M.2 2230 E key (USB/PCIe) (Support WiFi 5 & WiFi 6) 1 x mini-PCIe (USB/PCIe) I2C	
AUDIO	Audio Codec	Realtek ALC888	
ETHERNET	Controller	2 x Intel® I225-IT PCIe	
REAR I/O	Ethernet	2 x GbE (RJ-45)	
	USB	2 x USB 3.1 Gen2 10Gbps	
	Display	1 x DP++ 1 x VGA	
INTERNAL I/O	Serial	1 x RS232/422/485 + 1 x RS232, or 1 x RS232/422/485 + 8bit DIO (BIOS select)	
	USB	4 x USB 2.0	
	Display	1 x LVDS or eDP + Backlight	
	Audio	1 x Audio (Line-out/Mic-in)	
	SATA	1 x SATA 3.0 1 x 5V SATA Power (support SATA HDD LED via front panel)	
	Front Panel	1 x front panel (power button/reset button, power LED, HDD act LED)	
WATCHDOG TIMER	Output & Interval	System Reset, Programmable via Software from 1 to 255 Seconds	
SECURITY	TPM	TPM 2.0	
POWER	Type	Wide Range 9~36VDC	
	Connector	DC Jack (or vertical type 4pin connector)	
	Consumption	TBD	
	RTC Battery	CR2032 Coin Cell	
OS SUPPORT	Microsoft	Windows 10 IoT 2019 LTSC Windows 10 IoT 2021 LTSC Linux	
	Linux	Linux	
ENVIRONMENT	Temperature	Operating: -40°C ~ 85°C	Storage: -40°C ~ 85°C
	Humidity	Operating: 5% ~ 90% RH	Storage: 5% ~ 90% RH
	MTBF	TBD	
MECHANISM	Dimensions	3.5" SBC Form Factor	146mm (5.75") x 102mm (4.02")
STANDARDS AND CERTIFICATIONS	Certifications	CE, FCC Class B (TBD in later stage), RoHS, UKCA	

ORDERING INFORMATION

Model Name	Part Number	Description	CPU	Display	LAN	COM	GPIO	TPM	DC-in	Working temp.	Expansion
EHL556	770-EHL5561-000G	EHL556: N6210, eDP, 2 LAN, I2C, TPM 2.0	N6210	VGA+ eDP	2 GbE	1	8bit	Yes	DC jack	-20°C ~ 70°C	Mini-PCIe, M.2 2230, I2C
EHL556	770-EHL5561-100G	EHL556: x6413E, LVDS, 2 LAN, TPM 2.0	x6413E	VGA+ LVDS	2 GbE	2	N/A	Yes	DC jack	-40°C ~ 85°C	Mini-PCIe, M.2 2230
EHL556	770-EHL5561-200G	EHL556: x6425E, LVDS, 2 LAN, TPM 2.0	x6425E	VGA+ LVDS	2 GbE	2	N/A	Yes	DC jack	-40°C ~ 85°C	Mini-PCIe, M.2 2230
EHL556	770-EHL5562-200G	EHL556: x6425E, HDMI+DP, LVDS, 2 LAN, TPM 2.0	x6425E	HDMI+ DP	2 GbE	2	N/A	Yes	DC jack	-40°C ~ 85°C	Mini-PCIe, M.2 2230
EHL556	770-EHL5562-300G	EHL556: x6425E, HDMI+DP, LVDS, 2LAN, 1COM+DIO, mPCIe, TPM 2.0	X6425E	HDMI+ DP	2 GbE	1	8bit	Yes	DC jack	-40°C ~ 85°C	Mini-PCIe, M.2 2230

OPTIONAL ITEMS

Items	Part Number	Description
Power adapter	671-106012-000G	60W, 12V, DC Jack, 0~40°C
	671-106013-000G	60W, 12V, DC Jack, -30 to 70°C
USB 2.0 cable	A81-001032-016G	Length: 200mm
Heat spreader	A71-808363-010G	HEATSPREADER, AL1050 146*102*7.5mm, FOR EHL556 BARE DIE CPU (J6413, J6412, J646, N621, N6210, N6415)
	A71-808363-000G	HEATSPREADER, AL1050 146*102*7.5mm, FOR EHL556 IHS CPU (x6211E, x6413E, x6425E, x6414RE, x6425RE)

PACKING LIST

• 1 EHL556 board	
• 1 SATA cable (Length: 300mm)	332-553001-205G
• 1 SATA power cable (Length: 250mm)	A81-004041-016G
• 1 COM cable (Length: 250mm)	332-753040-000G
• 1 Heatsink -20 to 70°C (Height: 29mm)	A71-008357-010G (PC client CPU)
• 1 Heatsink -40 to 80°C (Height: 29mm)	A71-008357-000G (Industry CPU)

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660