


# rBOX630

Robust RISC-based DIN-rail Fanless Embedded System with i.MX 6 Processor, 4 COM, 2 CAN Bus and DIO

## Features

- Fanless design
- RISC-based module (i.MX 6) processor
- 1GB DDR3 SDRAM onboard
- 4GB eMMC onboard
- Completed industrial AP development software
- 12~48 VDC wide range power input with terminal block
- Ready-to-run embedded Linux operating system
- Wide operating temperature range from -40°C to +70°C

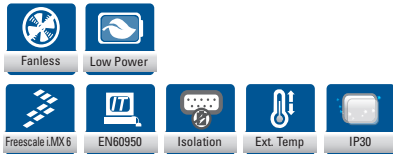


## Introduction

The rBOX630 cost-effective DIN-rail fanless embedded system utilizes the low power RISC-based module (i.MX 6) processor and is designed to withstand temperatures ranging from -40°C to +70°C for using in harsh environment and industrial automation applications.

The rBOX630 features 4 RS-232/422/485 serial ports, dual LANs, 8 digital input channels, 8 digital output channels, 2 CAN bus and 1 eMMC onboard 4 GB & 1 x SDHC socket for storage expansion (easy to access) in a compact, IP30 protected, industrial-strength robust case. Two power paths input minimize the risk of data loss in the event of a single power failure. Its vertical DIN-rail form factor makes it easy to install the system in a small cabinet. Because of ARM's low power consumption architecture, rBOX630 generate little heat while being operated. The ready-to-run rBOX630 is specially designed for industrial machine, automatic parking lot, traffic cabinet and more.

## Hardware Specifications

Standard Color	Silver-Black	
Construction	Extruded aluminum and heavy-duty steel, IP30	
CPU	i.MX 6, Cortex-A9 RISC CPU, 800MHz	
System Board	Q7M120	
System Memory	1 x DDR3-1600 onboard, 1GB	
System I/O Outlet	Serial Port	4 x RS-232/422/485 (COM 1 - 4) COM 1-4 with TX/RX/RTS/CTS signals RS-232/422/485 interface select by software
	LAN	1 x 10/100/1000 Mbps Ethernet 1 x 10/100 Mbps Ethernet Magnetic isolation protection 1.5KV

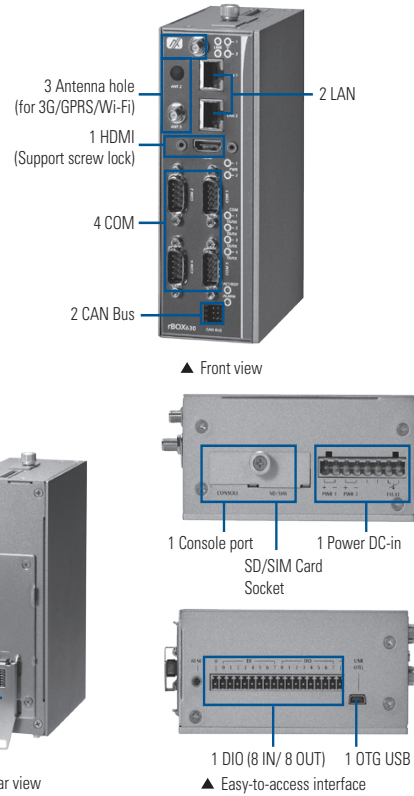

System I/O Outlet	Quantity	Description
HDMI	1 x	HDMI (Support screw lock)
USB	1 x	USB 2.0 OTG
CAN	2	CAN 2.0 B (Phoenix connector, non-isolation) Meets ISO 11898 standard Software control termination resistor 120 ohm can high speed up to 1Mbit/s for transmit/receive
DIO	1 x	DIO ( 8 IN/ 8 OUT ) with Isolation 2KV DI: Wet/Dry DO: Wet DI: Input channels: 8, source type Input voltage: 0 to 30 VDC digital input levels for dry contacts: -Logic level 0: close to GND -Logic level 1: open Digital input levels for wet contacts : -Logic level 0: +10V to +24V (DI to COM-) -Logic level 1: +3V max. DO : Output channels: 8, sink type Output current: Max. 200 mA per channel On-state voltage: 24 VDC nominal, open collector to 30 V Optical isolation protection 2 KV
Console Port	1	DB9 connector For user setting with debug
RTC	1	Battery onboard Provides power for the internal real time clock & calendar Ideal for vibration environment & reduces maintenance efforts
Alarm Contact	1	One relay output with current 0.5A@30VDC

\* All specifications and photos are subject to change without notice.

**Hardware Specifications**


System I/O Outlet	Wireless	1 x Mini card socket (supports USB interface) with 1 x SIM Socket by outside access and is easy plug/pull. 1 x Mini card socket (supports USB&PCIE interface) with 1 x SIM Socket by inside
Watchdog Timer	WDT 1: one step is 1 sec, 255 levels	
LEDs	System	Power, Alarm, Ready/Active, COM (TX, RX), Wireless
	Alarm	DC PWR1 or PWR2
Storage	1 x eMMC 4 GB onboard (for boot disk) Supports 1 x SDHC Card (easy-to-access, for store only.)	
Installation	DIN-rail, wall mount	
Power Supply	Power Input	2 power paths with terminal block
	Power Input Range	12-48 VDC
	Power Input Rating	12-48 VDC, 0.74-0.23A
	Power Protection	DC Version: OVP (Over voltage protection) UVP (Under voltage protection) Reverse protection
Operating Temperature	-40°C ~ +70°C (-40°F ~ +158°F)	
Humidity	10% ~ 95%	
Vibration Endurance	5G @ 10-150Hz, amplitude 0.35ms	
Weight (net/gross)	0.9 kg (2 lb)/1.3kg (2.87 lb)	
Dimensions	55 mm (2.16") (W) x 155 mm (6.10") (D) x 110 mm (4.33") (H)	
OS Linux	Linux	
	Host OS/ Development OS : Ubuntu 12.04 Yocto Dora LTS	
	Toolchain/ Cross compiler : Freescale Yocto	
	Kernel : 3.0.35 (with Freescale and Axiomtek hardware modified patch)	
Certificate	FCC Part 18	
	Heavy Industrial CE	

**Ordering Information**

<b>Standard</b>	
rBOX630-FL-DC	Robust DIN-rail fanless embedded system with Q7-RISC module (i.MX 6), 4 COM, 2 CAN and DIO (-40°C ~ +70°C)
<b>Optional</b>	
Wall mount kit	
Wireless (3G/GPS or Wi-Fi) module	

0  
 1  
 2  
**3**  
 4  
 5  
 6  
 7  
 8  
 9  
 10  
 11

**Dimensions**

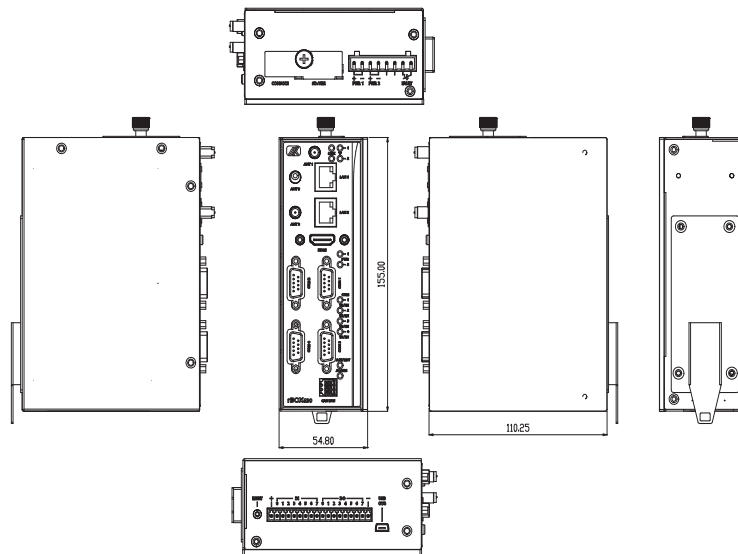

\* All specifications and photos are subject to change without notice.



## Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

### US

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +1 347 719 4508  
Support: +1 347 719 4508

1309 Coffeen Ave  
Ste 1200  
Sheridan  
WY 82801  
USA

### EMEA

[sales@assured-systems.com](mailto:sales@assured-systems.com)

Sales: +44 (0)1785 879 050  
Support: +44 (0)1785 879 050

Unit A5 Douglas Park  
Stone Business Park  
Stone  
ST15 0YJ  
United Kingdom

VAT Number: 120 9546 28  
Business Registration Number: 07699660