

AIEdge-X[®] 300-RTX30

Industrial AI Computing System at The Edge Powered by Intel[®] 8th Gen Intel[®] Core[™] CPU and NVIDIA[®] Graphics Card



Main Features

- Supports 8th/9th Gen Intel[®] Core[™] - i3/i5/i7 socket type processor up to 65W
- PCI-e slot supports PCI-e x16 graphics card up to 350W
- Validated with NVIDIA RTX30 series graphics card
- Industrial AI system stylish yet able to contain powerful GPU
- Support optional M.2 module for Wi-Fi and flash storage
- Support 1 x SATA 2.5" HDD/SSD

Product Overview

Powered by the 8th/9th generation Intel[®] Core[™] processor, the AIEdge-X[®] 300-RTX30 GPU enhanced Edge PC that can handle powerful multimedia content. In addition, it includes one expansion slot for graphics card that supports up to NVIDIA RTX 3090 GPU which powers up to 10496 CUDA Cores, not only does it offer stunning visuals for image projecting, it is also optimal for AI machine/deep learning. AIEdge-X[®] 300-RTX30 engages "calls to action" with virtual interactions in order to increase product interest and dwell time.

The AIEdge-X[®] 300-RTX30, supporting HDMI display, LAN ports, USB 3.0 ports, and a RS232/RS422/RS485 interface, is an ideal high-end PC to optimize Image analytics, interactive projection, information visualization, convey brand messages, customer engagement, and smart retail management efficiencies to increase customer interaction and brand awareness. The AIEdge-X[®]300-RTX30 can also support usages in education, interactive walls/floors, virtual and augmented reality and much more.

Specifications

CPU Support

- Socket LGA1151, Intel[®] 8/9th Generation Core[™] i9/i7/i5/i3 processor, 14nm process

| Generation | Socket Type | CPU | Smart Cache | Cores | Threads | Base Frequency | TDP |
|-------------------------|-------------|-----------|-------------|-------|---------|----------------|-----|
| 8th Coffee Lake | FCLGA1151 | i3-8100T | 6M | 4 | 4 | 3.1GHz | 35W |
| 8th Coffee Lake | FCLGA1151 | i5-8500T | 9M | 6 | 6 | 2.1GHz | 35W |
| 8th Coffee Lake | FCLGA1151 | i7-8700T | 12M | 6 | 12 | 2.4GHz | 35W |
| 8th Coffee Lake | FCLGA1151 | i3-8300 | 8M | 4 | 4 | 3.7GHz | 65W |
| 8th Coffee Lake | FCLGA1151 | i5-8500 | 9M | 6 | 6 | 3.0GHz | 65W |
| 8th Coffee Lake | FCLGA1151 | i7-8700 | 12M | 6 | 12 | 3.2GHz | 65W |
| 9th Coffee Lake Refresh | FCLGA1151 | i3-9100TE | 6M | 4 | 4 | 2.2GHz | 35W |
| 9th Coffee Lake Refresh | FCLGA1151 | i5-9500TE | 9M | 6 | 6 | 2.2GHz | 35W |
| 9th Coffee Lake Refresh | FCLGA1151 | i7-9700TE | 12M | 8 | 8 | 1.8GHz | 35W |
| 9th Coffee Lake Refresh | FCLGA1151 | i9-9900T | 16M | 8 | 16 | 2.1GHz | 35W |

Chipset

- Intel[®] PCH Q370

Graphics


- Supports up to RTX 2060 (graphics card optional)

- Integrated graphic powered by Intel[®] UHD graphics 630
- Suggested expansion card dimension within the limit of 290mm (L) x 121mm (W) x 43mm (H)
- Validated graphics card include:
 - ASUS PH-RTX2060-O6G

www.nexcom.com



System Architecture

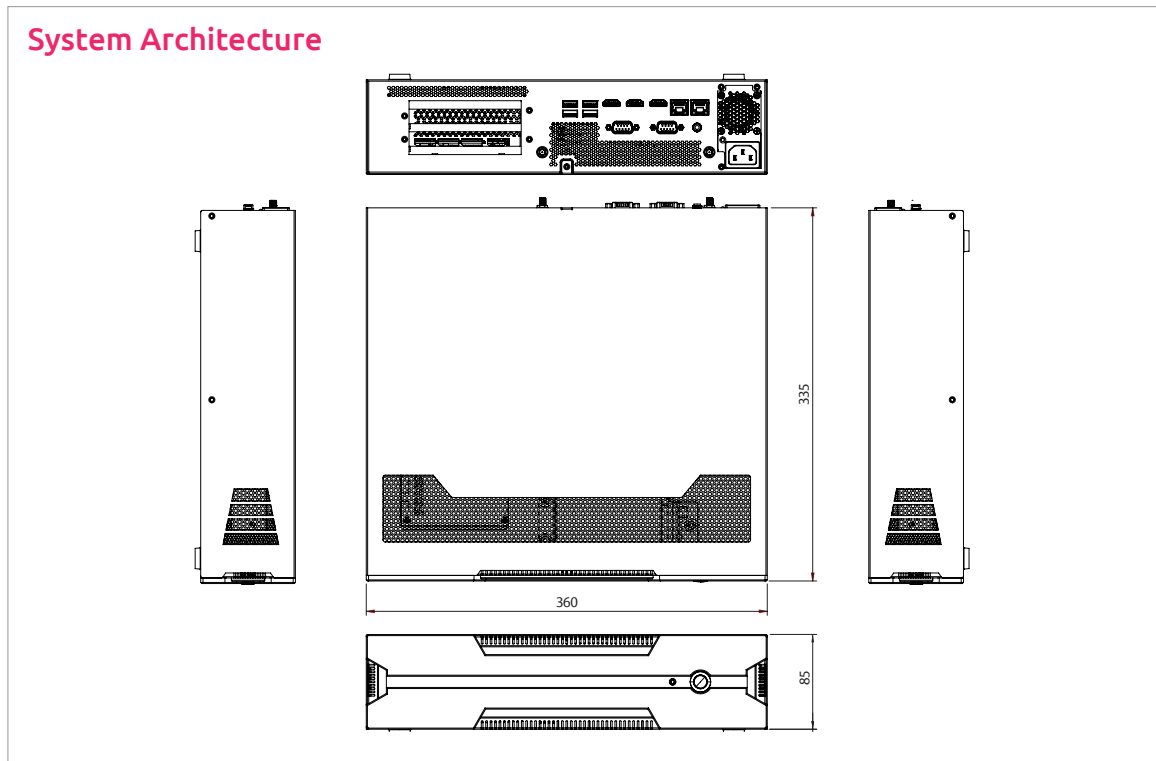

- Leadtek Quadro P2200

Main Memory

- 2 x 260-pin SO-DIMM sockets support DDR4-2400/2666 MHz non ECC, un-buffered memory up to 32G (single socket max16GB)

Internal I/O

- 2 x RS232 COM port box header
- 8 channels GPIO pin header
- 4 x USB 2.0 pin header
- 1 x SATA connector

I/O Interface

- 1 x Power button with LED
- 1 x HDD LED
- 2 x Antenna hole
- 3 x HDMI 2.0
- 4 x USB 3.0
- 2 x RJ45 with LEDs for gigabit LAN (i219LM/i211AT)
- 1 x COM 1 port RS232/RS422/RS485
- 1 x COM 2 port RS232
- 1 x Audio line out

Storage

- 1 x SATA 2.5" HDD/SSD
- 1 x M.2 Key M 2280 SSD with SATA/PCIe signal

Expansion

- PCIe x16 Gen 3 slot (2 slot space available for graphics card)
- 1 x M.2 Key E 2230 supporting Wi-Fi module

Power Supply

- 1 x 850W power supply
- Input: 100VAC to 240VAC

- Output: +12VDC

Environment

- Operating temperature: 0°C to 45°C (active cooling design)
- Storage temperature: -20°C to 80°C
- Humidity: 10% to 90% (non-condensing)
- Shock protection: 50G peak acceleration, 11ms according to IEC60068-2-27
- Vibration protection:
 - Random: 2Grms @ 5~500 Hz, IEC60068-2-64 (with SSD)
 - Sinusoidal: 2G @ 5~500 Hz, IEC60068-2-6 (with SSD)

Certification

- CE (EMC EN55032 + EN55024)
- FCC Class A (EMI part 15B)
- LVD

Dimensions

- 360mm (W) x 335mm (D) x 85mm (H)

Operating System Support

- Win10/Linux

Ordering Information

Barebone

- **AIEdge-X®300-RTX30 (P/N:10W20X30001X0)**
Industrial AI computing system at the Edge powered by Intel 8th/9th Gen Intel® Core™ CPU and NVIDIA® graphics card
- **AIBooster®-X8 (P/N: 10E000AIB00X0)**
Intel® Movidius™ Myriad™ X VPU PCIe deep learning accelerator card

Assured Systems

Assured Systems is a leading technology company with over 1,500 regular clients in 80 countries, deploying over 85,000 systems to a diverse customer base in 12 years of business. We offer high-quality and innovative rugged computing, display, networking and data collection solutions to the embedded, industrial, and digital-out-of-home market sectors.

US

sales@assured-systems.com

Sales: +1 347 719 4508
Support: +1 347 719 4508

1309 Coffeen Ave
Ste 1200
Sheridan
WY 82801
USA

EMEA

sales@assured-systems.com

Sales: +44 (0)1785 879 050
Support: +44 (0)1785 879 050

Unit A5 Douglas Park
Stone Business Park
Stone
ST15 0YJ
United Kingdom

VAT Number: 120 9546 28
Business Registration Number: 07699660